

Article No. : 6SL3210-1KE21-3AF1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :



Figure similar

Rated data

Input	
Number of phases	3 AC
Line voltage	380 ... 480 V +10 % -20 %
Line frequency	47 ... 63 Hz
Rated current (LO)	16.50 A
Rated current (HO)	12.80 A

Output	
Number of phases	3 AC
Rated voltage	400V IEC 480V NEC ¹⁾
Rated power (LO)	5.50 kW 7.50 hp
Rated power (HO)	4.00 kW 5.00 hp
Rated current (LO)	12.50 A
Rated current (HO)	8.80 A
Rated current (IN)	13.00 A
Max. output current	17.60 A
Pulse frequency	4 kHz
Output frequency for vector control	0 ... 240 Hz
Output frequency for V/f control	0 ... 550 Hz

Overload capability	
Low Overload (LO)	
150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time	
High Overload (HO)	
200% base load current IH for 3 s, followed by 150% base load current IH for 57 s in a 300 s cycle time	

General tech. specifications

Power factor λ	0.70 ... 0.85
Offset factor cos φ	0.95
Efficiency η	0.97
Sound pressure level (1m)	63 dB
Power loss	173.0 W
Filter class (integrated)	Class A

Communication

Communication	PROFINET, EtherNet/IP
---------------	-----------------------

Inputs / outputs

Standard digital inputs	
Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

Fail-safe digital inputs	
Number	1

Digital outputs	
Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 0.5 A
Number as transistor	1
Output (resistive load)	DC 30 V, 0.5 A

Analog / digital inputs	
Number	1 (Differential input)
Resolution	10 bit

Switching threshold as digital input	
0→1	4 V
1→0	1.6 V

Analog outputs	
Number	1 (Non-isolated output)

PTC/ KTY interface	
1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy ±5 °C	

Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

Article No. : 6SL3210-1KE21-3AF1

Ambient conditions	
Cooling	Air cooling using an integrated fan
Cooling air requirement	0.009 m³/s (0.318 ft³/s)
Installation altitude	1,000 m (3,280.84 ft)

Ambient temperature

Operation	-10 ... 40 °C (14 ... 104 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)

Relative humidity

Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
----------------	--

Connections	
-------------	--

Signal cable

Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)
-------------------------	--

Line side

Version	Plug-in screw terminals
Conductor cross-section	4.00 ... 6.00 mm² (AWG 12 ... AWG 10)

Motor end

Version	Plug-in screw terminals
Conductor cross-section	4.00 ... 6.00 mm² (AWG 12 ... AWG 10)

DC link (for braking resistor)

Version	Plug-in screw terminals
Conductor cross-section	4.00 ... 6.00 mm² (AWG 12 ... AWG 10)
Line length, max.	15 m (49.21 ft)
PE connection	On housing with M4 screw

Max. motor cable length

Shielded	50 m (164.04 ft)
Unshielded	100 m (328.08 ft)

Mechanical data	
-----------------	--

Degree of protection	IP20 / UL open type
Frame size	FSB
Net weight	2.30 kg (5.07 lb)

Dimensions


Width	100 mm (3.94 in)
Height	196 mm (7.72 in)
Depth	203 mm (8.19 in)

Standards	
-----------	--

Compliance with standards	CE, cUL, UL, KC, EAC, C-Tick (RCM)
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Converter losses to IEC61800-9-2*	
-----------------------------------	--

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	34.2 %

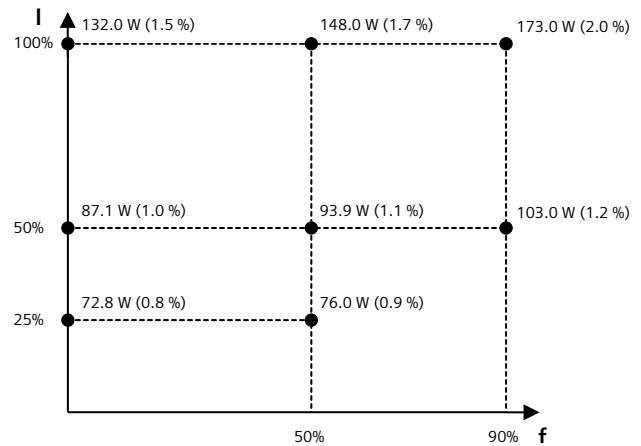

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V