
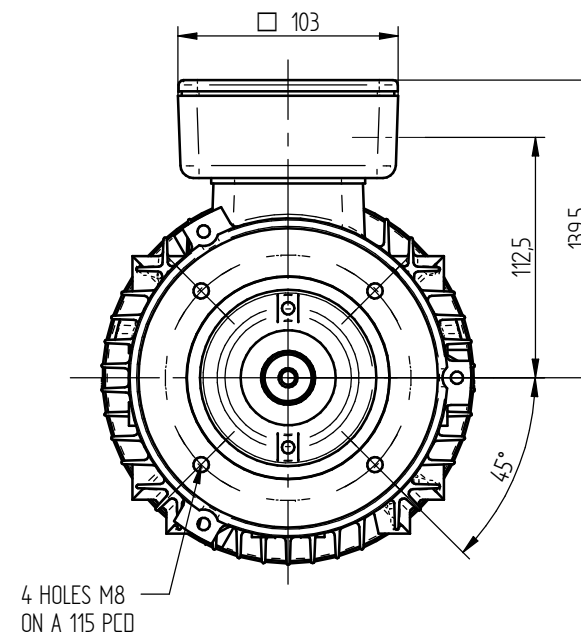
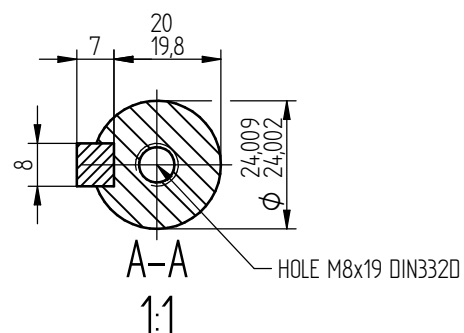


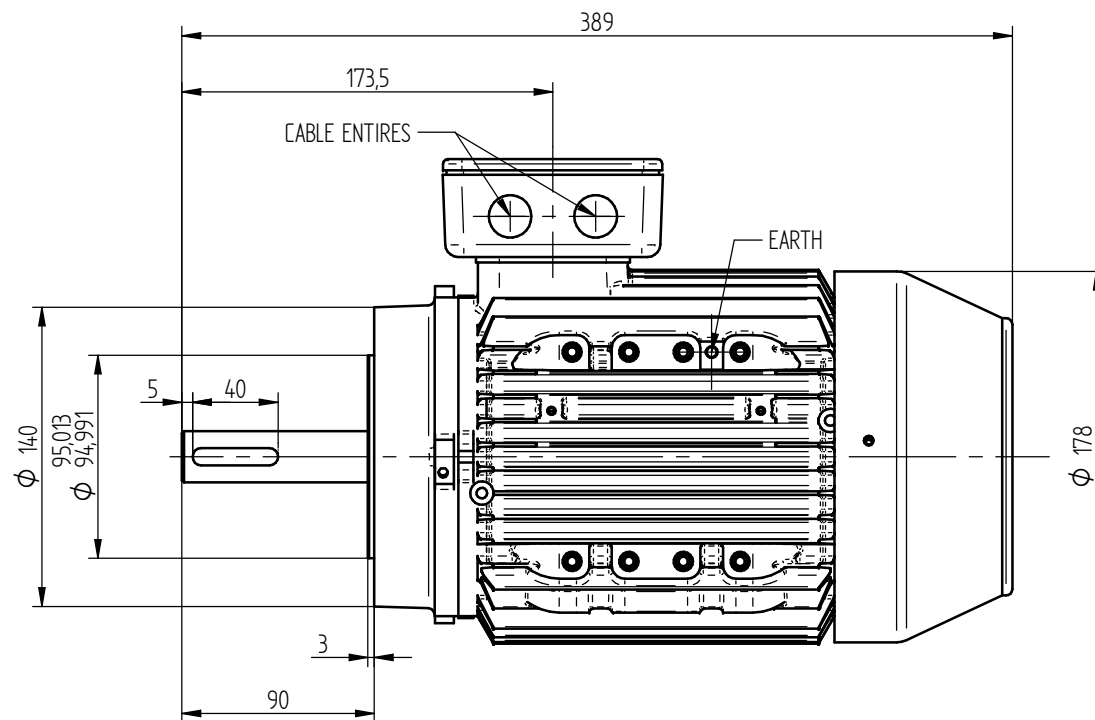

TERMINAL BOX POSITION:

- CAN BE ARRANGED AT EITHER 9, 12 OR 3 O'CLOCK.
- STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN.

CONDUIT ENTRIES:

- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS (CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY).

ALL DIMENSIONS IN MILLIMETERS



FIRST ANGLE
PROJECTION

**BROOK
CROMPTON**

Produced by **Tamel** a company of **ATB**
ELECTRIC MOTORS Technology in Motion

SHEET SIZE A3	TITLE: OUTLINE DIMENSIONS OF METRIC STANDARD 3-PHASE MOTOR, TOTALLY ENCLOSED FAN VENTILATED. ALUMINIUM 90LX FRAME, B14-FLANGE MOUNTED.	DRAWN	NAME	DATE	DRG. No.	W22GC0019T		
			JS	2016-12-14	DRG. REF.			
			CHECKED	KZ	2016-12-14	REVISION:		DATE
			SCALE	1 : 2,5				

SPECIAL REMARKS: SPECIAL SHAFT