
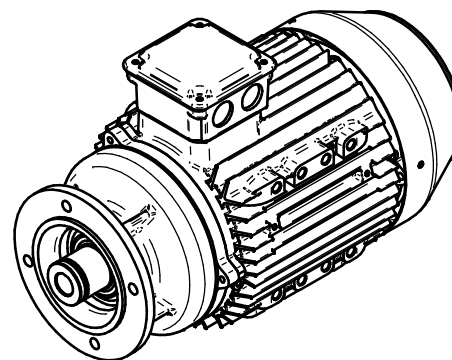
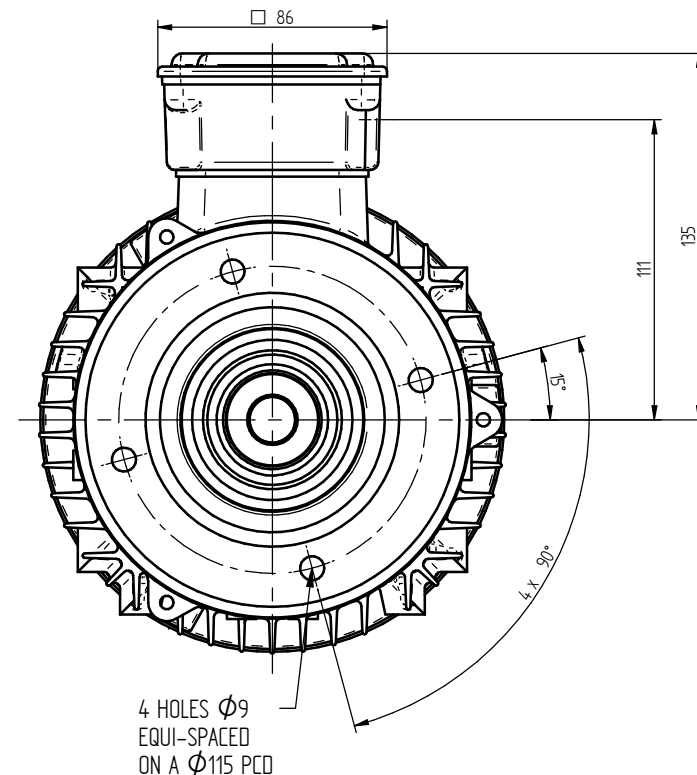


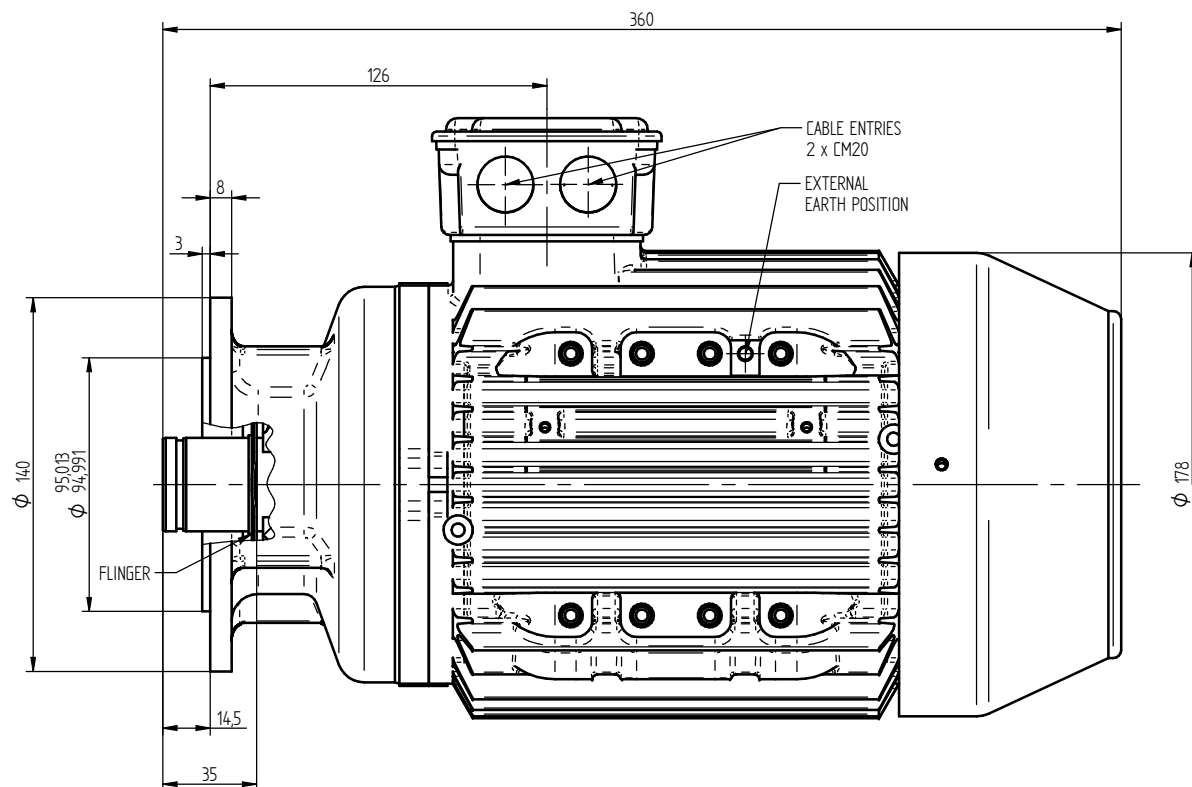

TERMINAL BOX POSITION:

- CAN BE ARRANGED AT EITHER 9, 12 OR 3 O'CLOCK.
- STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN.

CONDUIT ENTRIES:

- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS (CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY).

TITLE: OUTLINE DIMENSIONS OF METRIC STANDARD 3-PHASE MOTOR, TOTALLY-ENCLOSED FAN-COOLED ALUMINIUM 90LX FRAME, STEPHAN S115 FLANGE MOUNTED.

SPECIAL REMARKS: FLINGER; K18 (REXNORD) SHAFT;

DRAWN	PGO	05-12-2018
CHECKED	KZ	05-12-2018
SCALE	1:2	

ALL DIMENSIONS IN MILLIMETERS			
		FIRST ANGLE PROJECTION	
BROOK CROMPTON Keeping Industry Turning 			
Produced by <i>ATB Tamel S.A.</i> a company of 			
DRG. No.		090W001906T	
DRG. REF.			
REVISION:		0	DATE0

SHEET
SIZE

A3