

LOOSE LEADS + EARTH, 1,5m LONG -533 243 - LIFTING LUG ENTRY 1xCM40 100 180,014 179,989 0 TERMINAL PLATE POSITION: - CAN BE ARRANGED AT EITHER 9, 12 OR 3 O'CLOCK. M16x36DEEP - STANDARD TERMINAL PLATE POSITION IS 12 O'CLOCK AS SHOWN. TO DIN FORM 'D' 1:2

www.tamel.pl



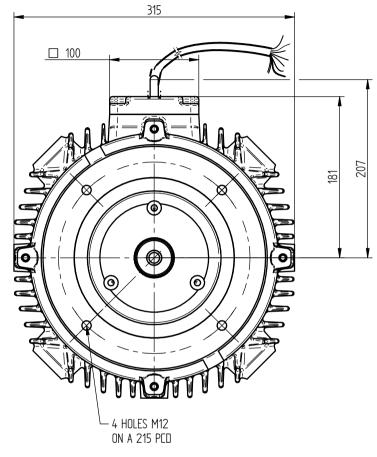

ALL DIMENSIONS IN MILLIMETERS



FIRST ANGLE PROJECTION

BROOK CROMPTON

Produced by **Tame/s.a** a company of **Line State**

V/.1GC001/.T

SHEET SIZE **A3**

SPECIAL REMARKS:

OUTLINE DIMENSIONS OF METRIC STANDARD 3-PHASE MOTOR, TOTALLY ENCLOSED NONVENTILATED DRAWN W SERIES DF160L FRAME, B14 FLANGE MOUNTED.

NAME DATE 2017-07-17 JS CHECKED SCALE

DRG. No.	Y41GE0014T		
DRG. REF.			
REVISION:	0	DATE:	