
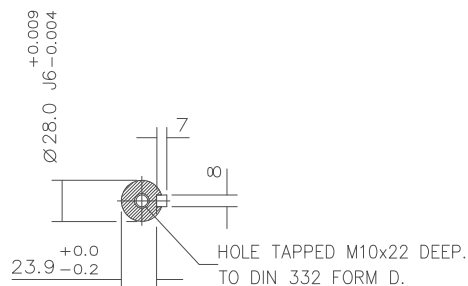


DRG. No. W10GC009/2

DRG. REF.

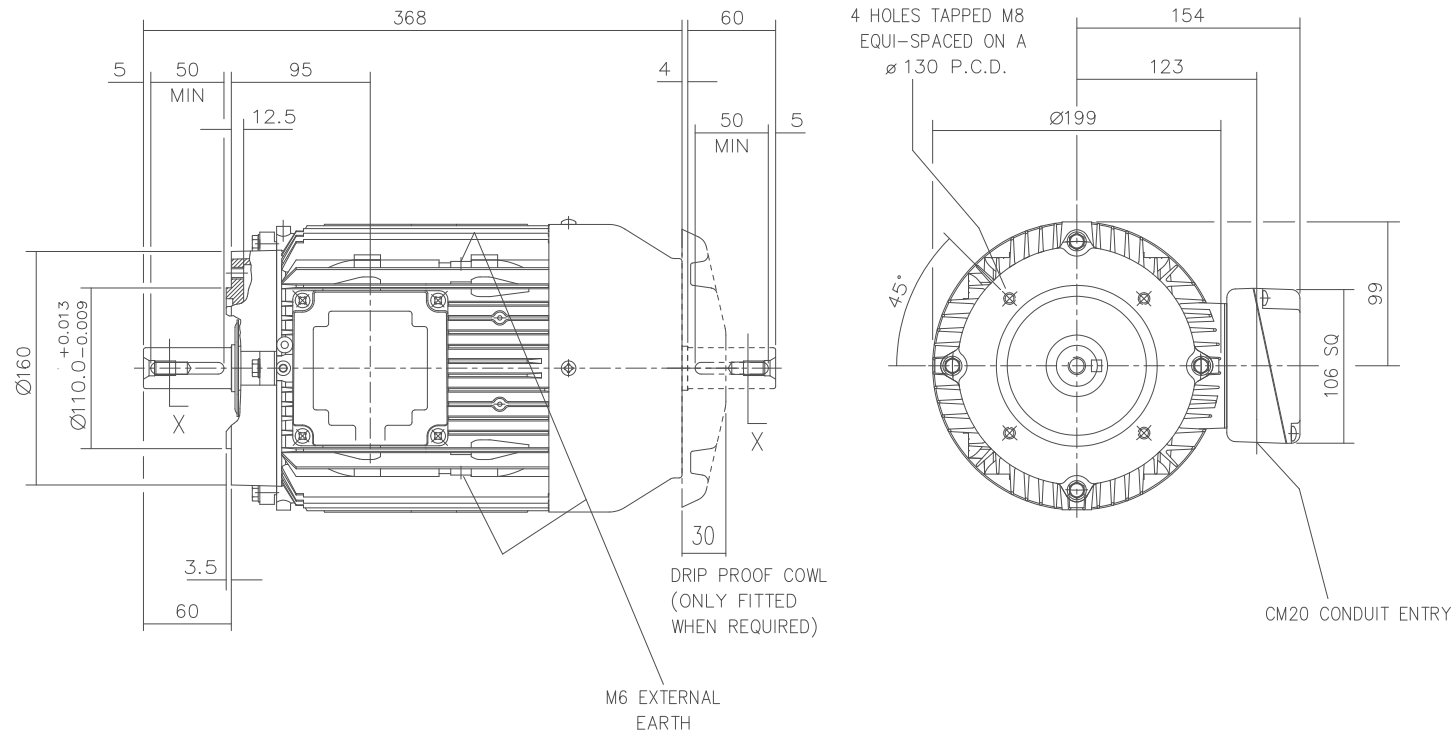

VIEW ON 'X'

CARE SHOULD BE TAKEN TO ENSURE THAT THE SCREWS OR STUDS DO NOT EXTEND INSIDE MOTOR BEYOND THE DEPTH OF THE TAPPED FIXING HOLE.


TERMINAL BOX POSITION:- CAN BE ARRANGED AT EITHER 9,12 OR 3 O'CLOCK.

STANDARD TERMINAL BOX POSITION IS 3 O'CLOCK AS SHOWN.

CONDUIT ENTRIES:- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS (CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY).

CUSTOMER		
ORDER No.		
PART No.		
FRAME SIZE		
KW.	RPM.	
Hz	PHASE	
VOLTS	POLES	
BRGS.	DE.	NDE.
MOTOR NETT WT.		Kg.
SPECIAL REMARKS		

ALL DIMENSIONS IN MILLIMETRES.



FIRST ANGLE
PROJECTION

**BROOK
CROMPTON**

Huddersfield, HD1 3LJ
ENGLAND

SHEET SIZE A3	TITLE OUTLINE DIMENSION DRAWING W ALUMINIUM TOTALLY ENCLOSED FAN COOLED 100L FRAME 'C' FACE MOUNTED MOTOR		NAME	DATE	DRG. No. W10GC009/2			
		DRAWN	DRM	23-04-98	-----			
		CHECKED	PAD	23-04-98	DRG. REF.			
		SCALE	1: 3.5		REVISION:	VLS	DATE	30-04-01