


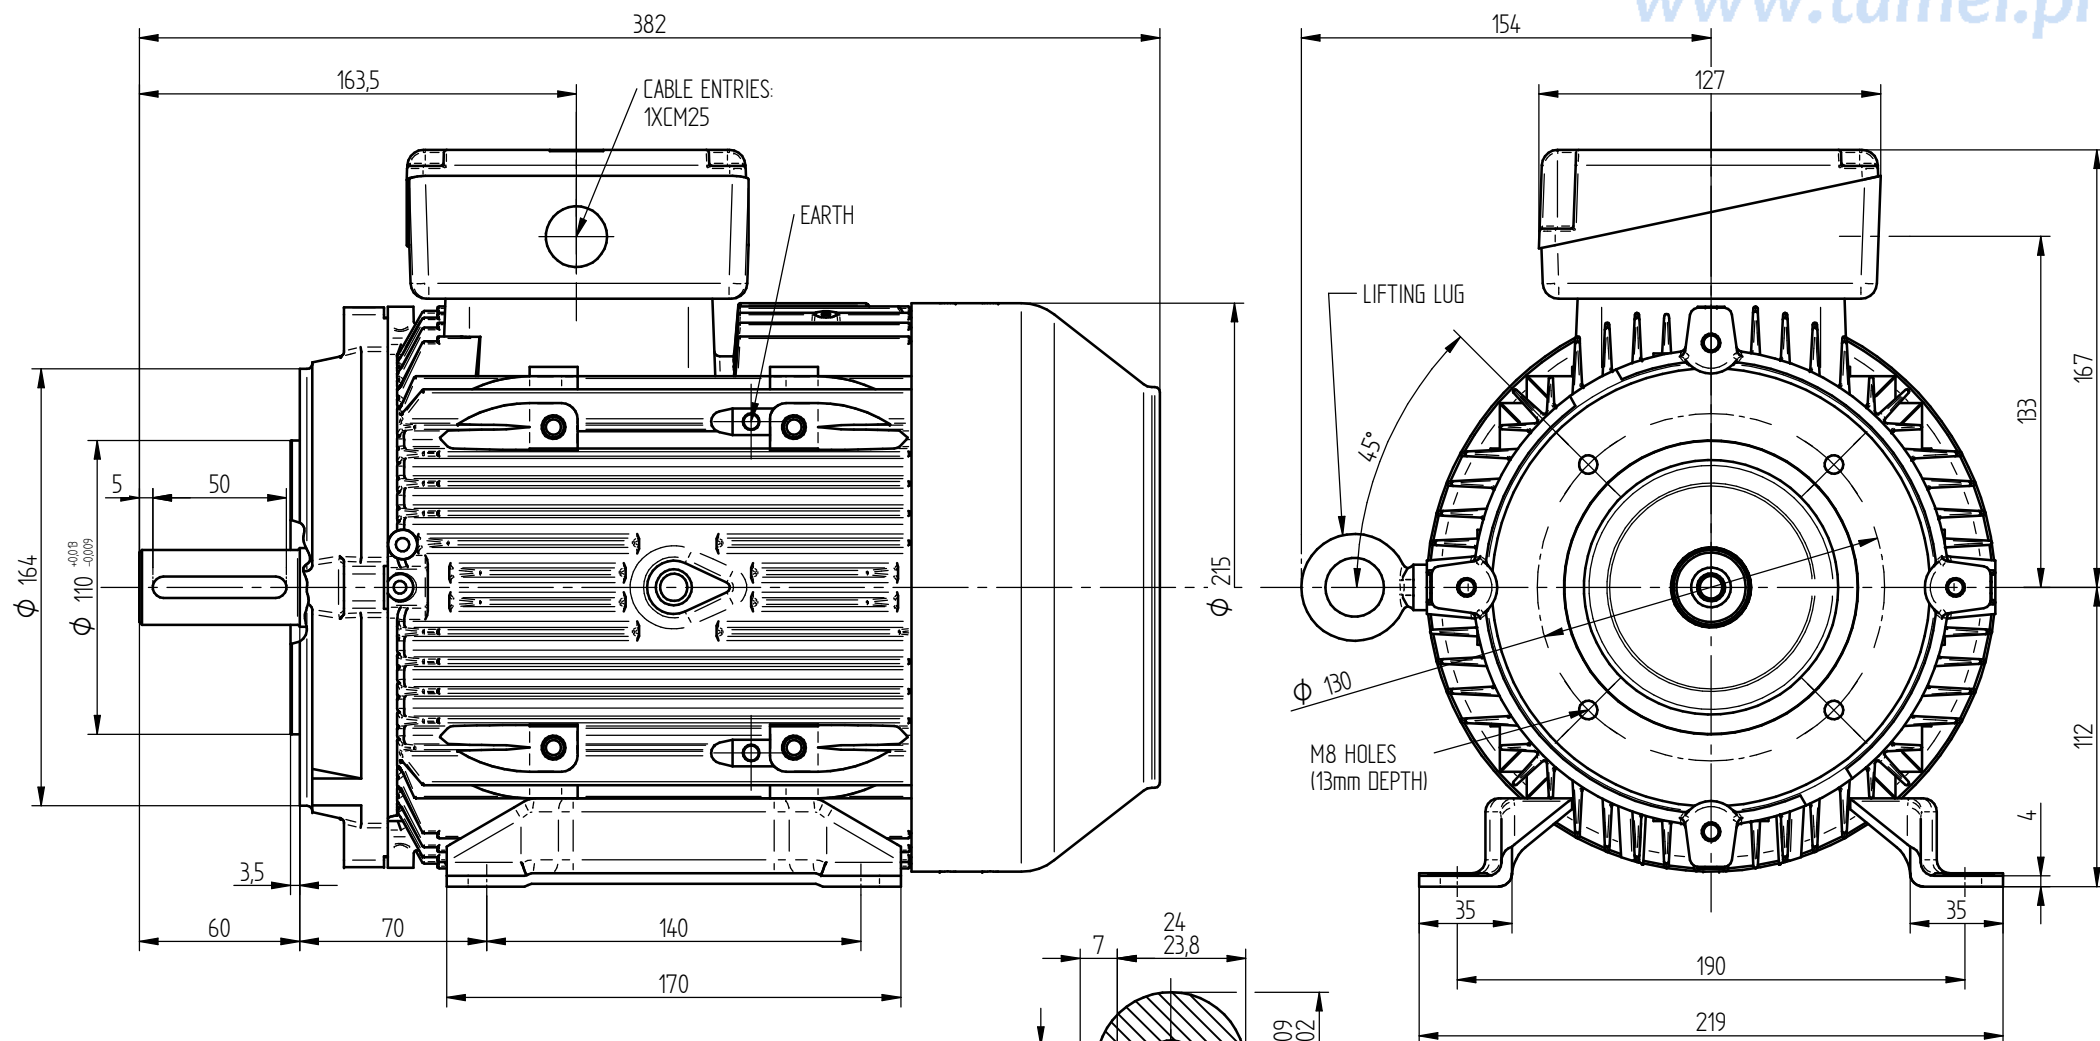

TERMINAL BOX POSITION:

- CAN BE ARRANGED AT EITHER 9, 12 OR 3 O'CLOCK.
- STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN.

CONDUIT ENTRIES:

- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS (CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY).

SHEET
SIZE

A3

TITLE: OUTLINE DIMENSIONS OF METRIC STANDARD 3-PHASE MOTOR, TOTALLY-ENCLOSED FAN-COOLED ALUMINIUM 112 FRAME, B14-FLANGE & FOOT MOUNTED.

SPECIAL REMARKS:

NAME	DATE	DRG. No.	W26GC0007T
DRAWN	KZ	09-05-16	
CHECKED	JS	09-05-16	
SCALE	1:2	REVISION:	0 DATE

ALL DIMENSIONS IN MILLIMETERS



FIRST ANGLE
PROJECTION

**BROOK
CROMPTON**

Produced by **Tamel** a company of **ATB**