

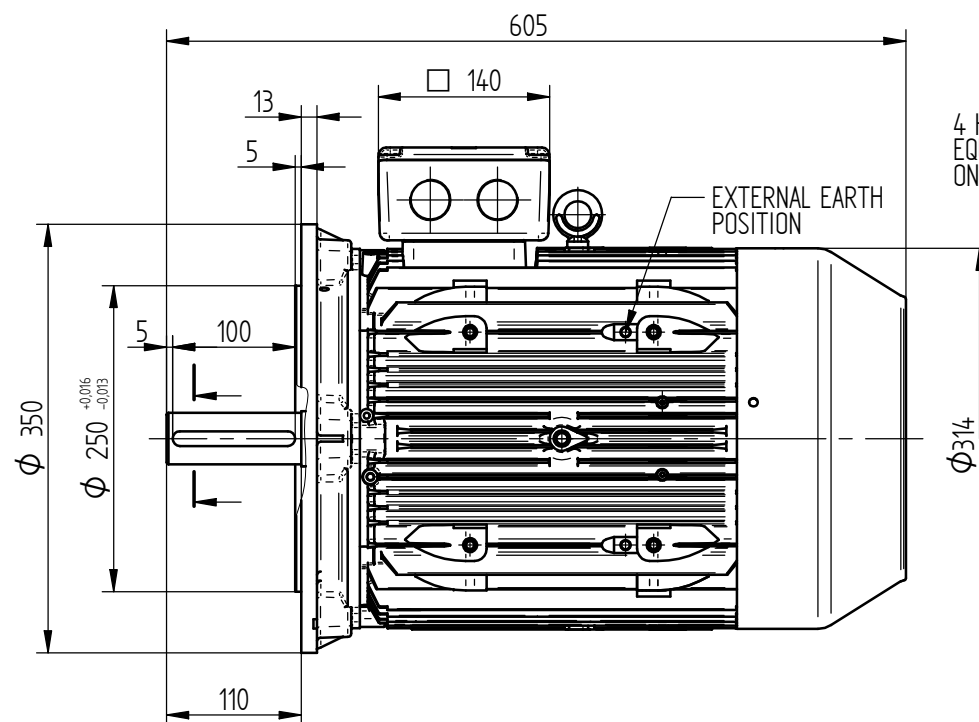




4 HOLES $\phi 18,5$
EQUI-SPACED
ON 300 P.C.D.

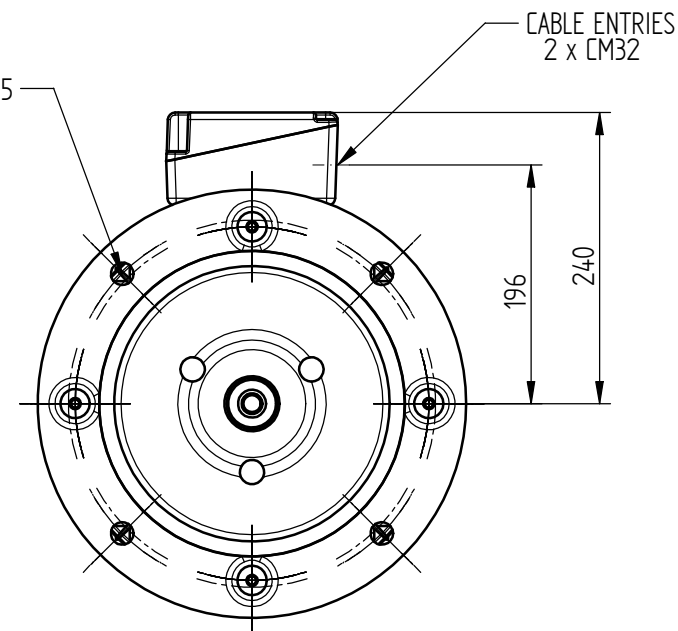

TERMINAL BOX POSITION: CAN BE ARRANGED AT EITHER 9,12 OR 3 O'CLOCK.
STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN.
CONDUIT ENTRIES:- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY).

ALL DIMENSIONS IN MILLIMETERS

FIRST ANGLE
PROJECTION

**BROOK
CROMPTON**

Produced by **Tamel** S.A. a company of **ATB**

SHEET SIZE A3	TITLE: OUTLINE DIMENSION DRAWING W ALUMINIUM TOTALLY ENCLOSED FAN COOLED 160L/M FRAME D FLANGE MOUNTED MOTOR		NAME	DATE	DRG. No. W41GH0155T			
		DRAWN	JM	22-04-11	DRG. REF.			
		CHECKED						
		SCALE	1 : 4			REVISION:		DATE: