

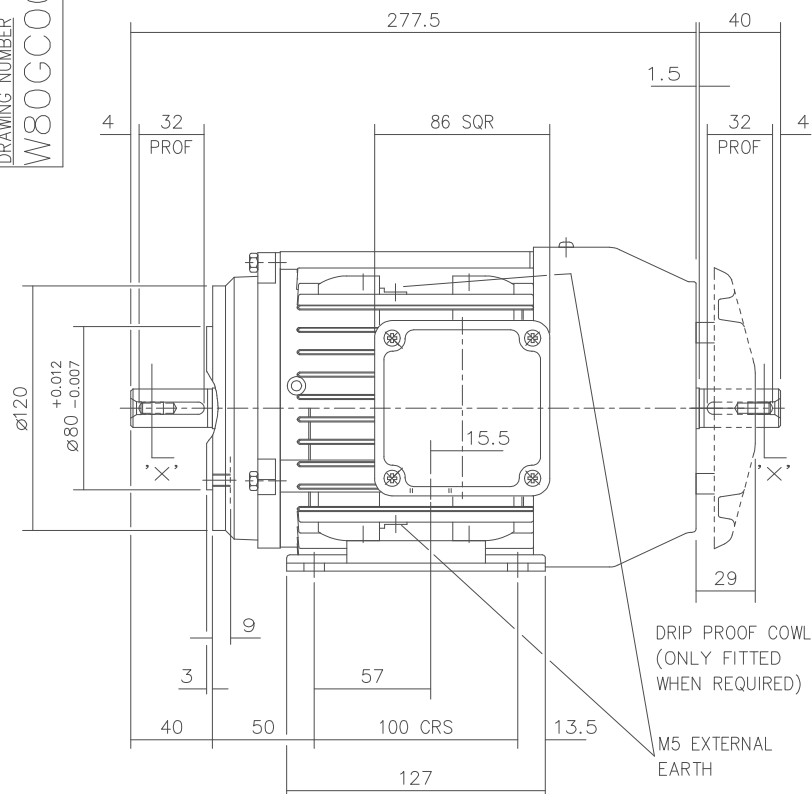


W80GC001/2

REF: A3NEW

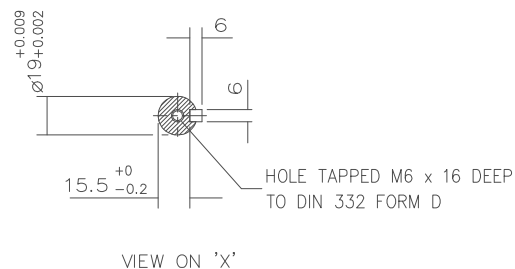

4 HOLES TAPPED M6
THROUGH ON A 100 P.C.D.
EQUI-SPACED AS SHOWN

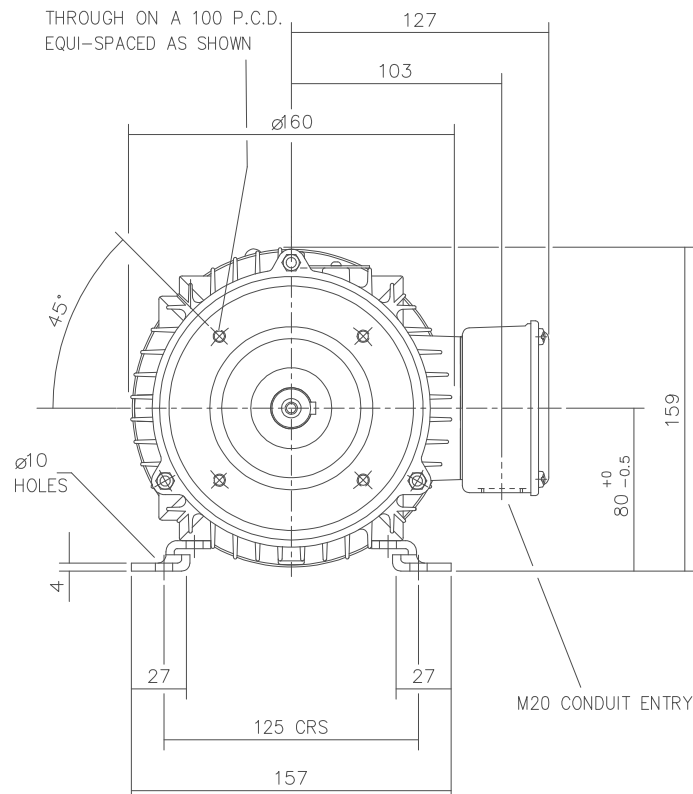

TERMINAL BOX POSITION:- CAN BE ARRANGED AT EITHER 9,12 OR 3 O'CLOCK BY MOVING
STANDARD TERMINAL BOX POSITION IS 3 O'CLOCK AS SHOWN.
CONDUIT ENTRIES:- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY).
NOTE: CARE SHOULD BE TAKEN TO ENSURE THAT SCREWS OR STUDS DO NOT
EXTEND INSIDE THE MOTOR BEYOND THE DEPTH OF THE THREAD FIXING HOLE

CUSTOMER		
ORDER No.		
SERIAL No.		
FRAME SIZE		
KW.	RPM.	
Hz	PHASE	
VOLTS	POLES	
BRGS.	DE.	NDE.
MOTOR NETT WT.		Kg
SPECIAL REMARKS		

ALL DIMENSIONS IN MILLIMETRES.



FIRST ANGLE
PROJECTION



Brook Crompton

Small Industrial Motors
Huddersfield, W. Yorkshire, HD1 3LJ

DRG. No.	
----------	--

W80GC001 / 2

REVISION:	VLS	DATE	27-04-01
-----------	-----	------	----------

SHEET SIZE A3	TITLE		NAME	DATE
	OUTLINE DIMENSION DRAWING W ALUMINIUM TOTALLY ENCLOSED FAN COOLED 80 FRAME FOOT AND 'C' FACE MOUNTED MOTOR	DRAWN	RS.	07/03/97
		CHECKED	AH.	07/03/97
		SCALE	1: 2.5	