

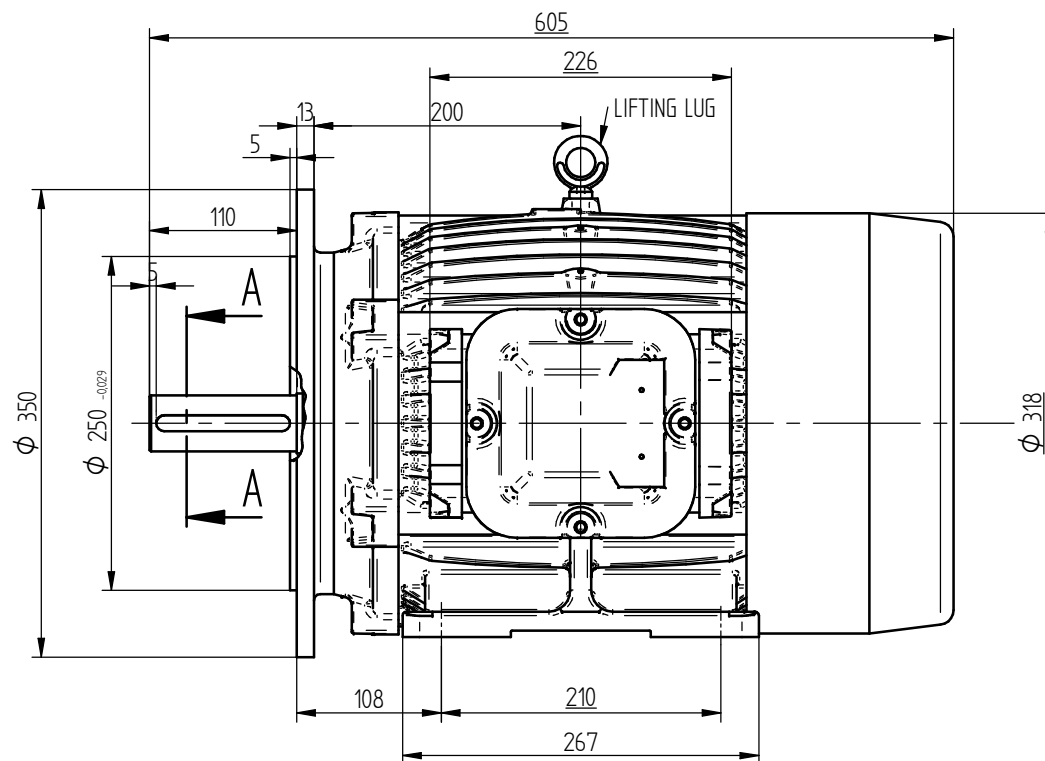


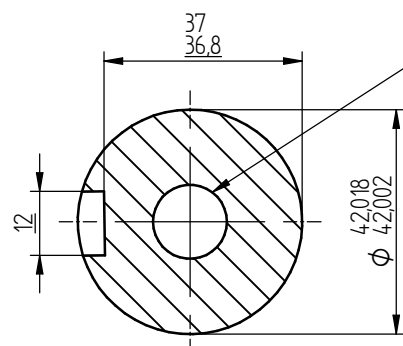

4 HOLES
DRILLED $\phi 19$
EQUALLY SPACED
ON 300MM PCD

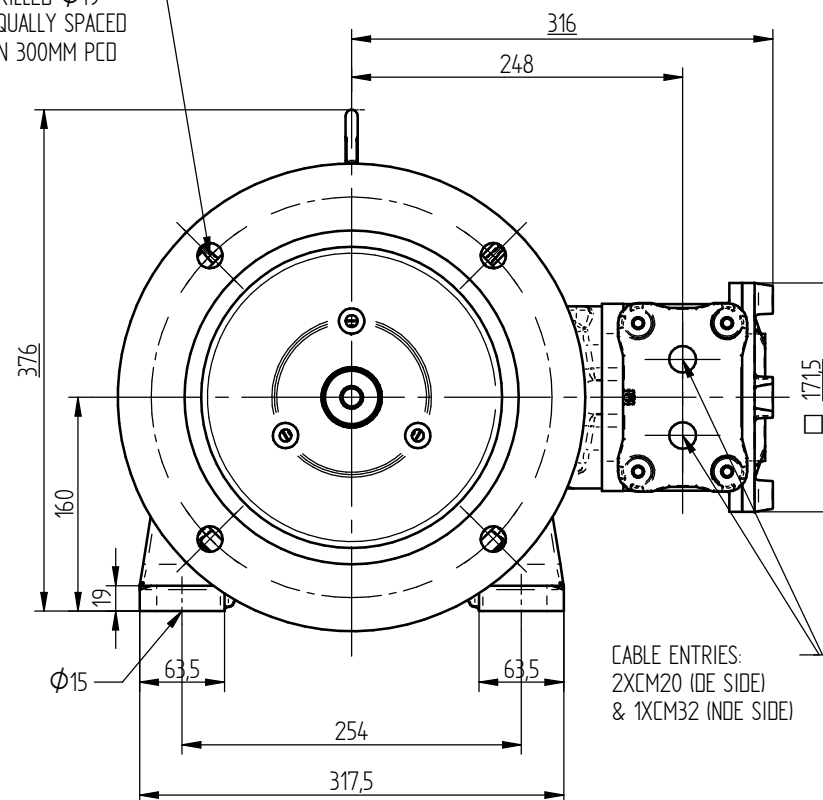

A-A
1:1

HOLE TAPPED M16 x 36.0 DEEP
TO DIN 332 FORM D

TERMINAL BOX POSITION:

- CAN BE ARRANGED AT EITHER 9, 12 OR 3 O` CLOCK.
- STANDARD TERMINAL BOX POSITION IS 12 O`CLOCK AS SHOWN.

CONDUIT ENTRIES:

- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY).

ALL DIMENSIONS IN MILLIMETERS



FIRST ANGLE
PROJECTION

**BROOK
CROMPTON**

Produced by **Tamel** a company of **NTB**

SHEET
SIZE
A3

TITLE:
**OUTLINE DIMENSIONS METRIC A.C. MOTOR TOTALLY ENCLOSED FAN VENTILATED.
W-UEF315MN 4 POLE FRAME WITH FT130 B14 FLANGE MOUNTED**

	NAME	DATE	DRG. No.
DRAWN	KZ	09-03-15	DRG. REF.
CHECKED			
SCALE	1 : 4	REVISION:	DATE