


A-A  
1:2  
HOLE TAPPED M16x36 DEEP  
TO DIN 332 FORM 'D'

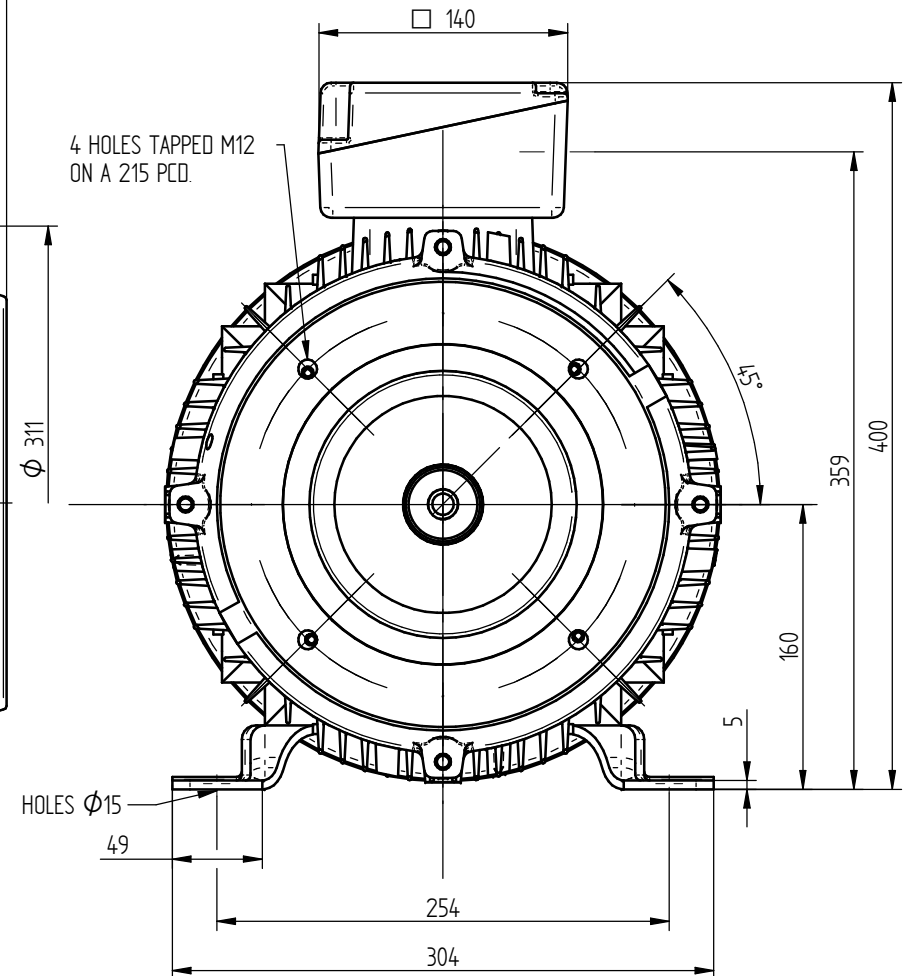

TERMINAL BOX POSITION:  
- CAN BE ARRANGED AT EITHER 9, 12 OR 3 O' CLOCK.  
- STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN.  
CONDUIT ENTRIES  
- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS

ALL MOUNTING DIMENSIONS: ISO 2768-mK ACC TO EN 22768-1/2

ALL DIMENSIONS IN MILLIMETERS



FIRST ANGLE  
PROJECTION

**BROOK  
CROMPTON**

Produced by **Tamel s.r.l.** a company of **NTB**  
Technology in Motion

SHEET  
SIZE

A3

TITLE:

OUTLINE DIMENSION DRAWING TOTALLY ENCLOSED FAN COOLED  
WP-DA160L FRAME C FLANGE AND FOOT MOUNTED MOTOR

	NAME	DATE
DRAWN	SZ	30-04-19
CHECKED	RG	30-04-19
SCALE	1:3	

DRG. No.	WP-DA160L B34		
DRG. REF.			
REVISION:		DATE:	