
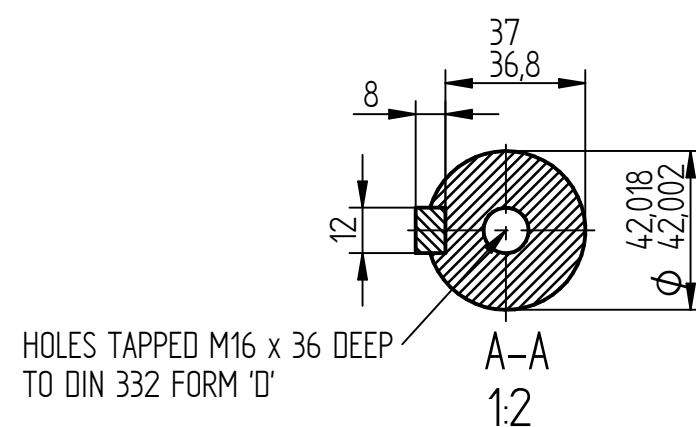
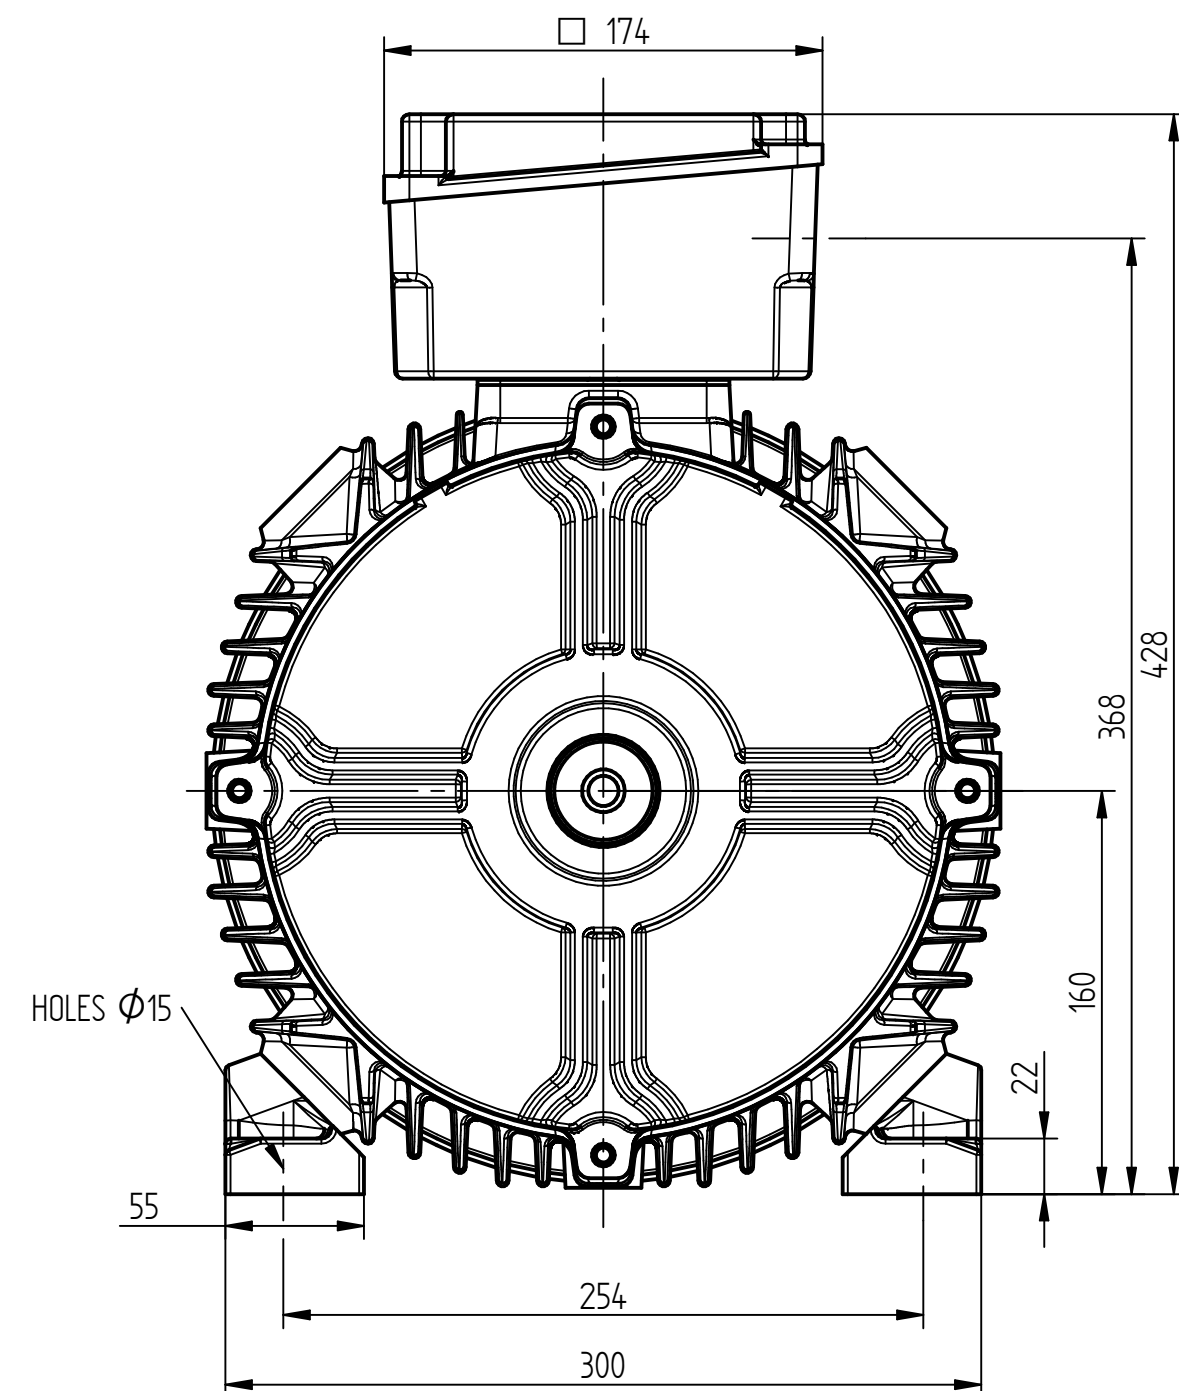


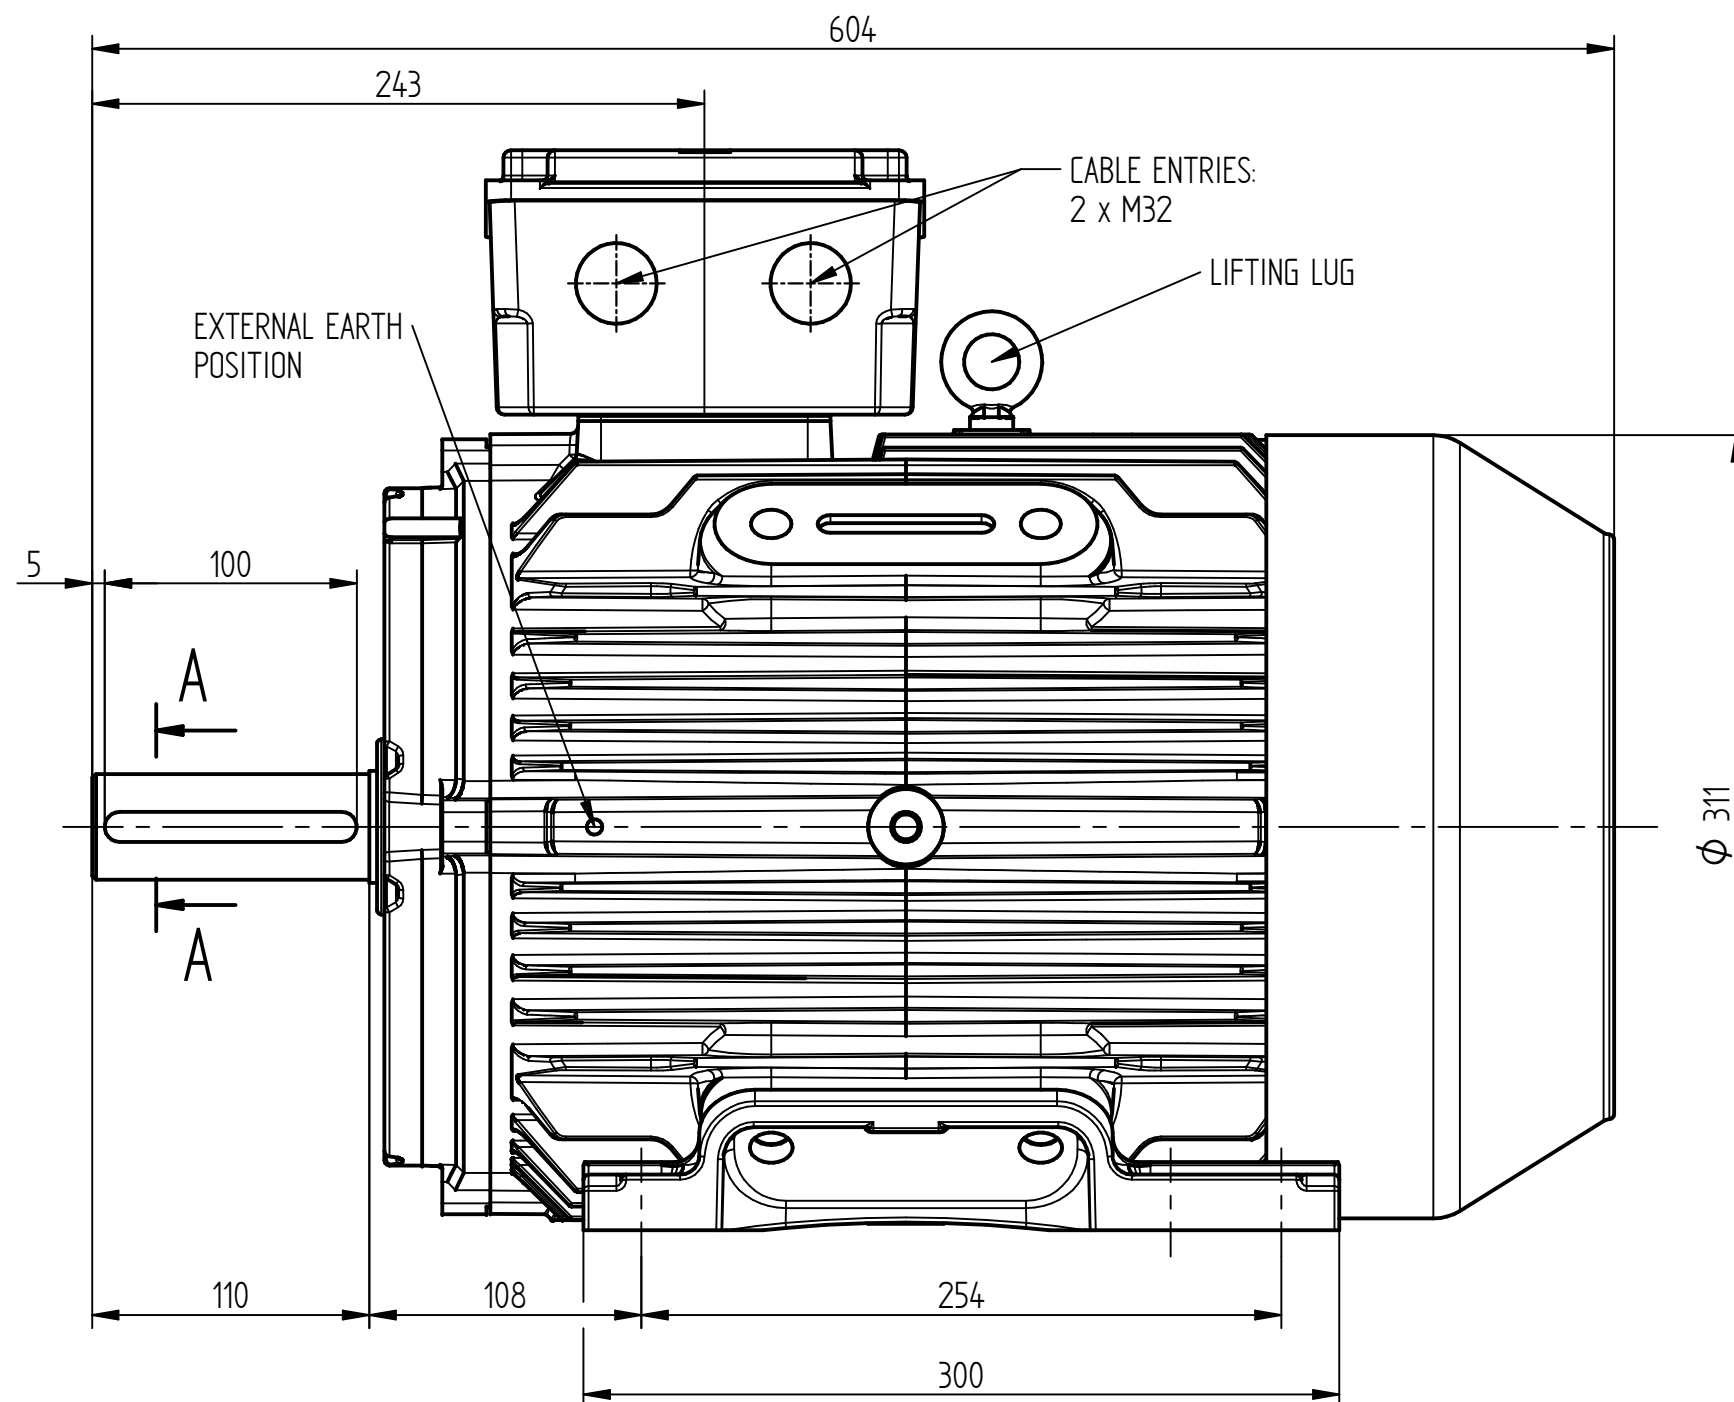

TERMINAL BOX POSITION:


- CAN BE ARRANGED AT EITHER 9, 12 OR 3 O'CLOCK.
- STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN.

CONDUIT ENTRIES:

- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS.

ALL MOUNTING DIMENSIONS: ISO 2768-mK ACC TO EN 22768-1/2

ALL DIMENSIONS IN MILLIMETERS



FIRST ANGLE
PROJECTION

**BROOK
CROMPTON**

Produced by ATB Tamei S.A. a company of **ATB**
Technology in Motion

SHEET
SIZE

A3

TITLE:

OUTLINE DIMENSION DRAWING TOTALLY ENCLOSED FAN COOLED
WP-DF160L FRAME FOOT MOUNTED MOTOR

	NAME	DATE
DRAWN	SZ	08-05-19
CHECKED	RG	08-05-19
SCALE	1:3	

DRG. No.	WP-DF160L B3		
DRG. REF.			
REVISION:		DATE:	