

TERMINAL BOX POSITION:

- CAN BE ARRANGED AT EITHER 9, 12 OR 3 O'CLOCK.
- STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN.

CONDUIT ENTRIES:


- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS.

ALL MOUNTING DIMENSIONS: ISO 2768-mK ACC TO EN 22768-1/2


3 LIFTING LUGS
DIAGONALLY OPPOSITE

8 HOLES $\phi 24$
EQUALLY SPACED
ON A 600 P.C.D.

THE LIFTING LUG FITTED
ONLY WHEN MOTOR IS
VERTICALLY MOUNTED

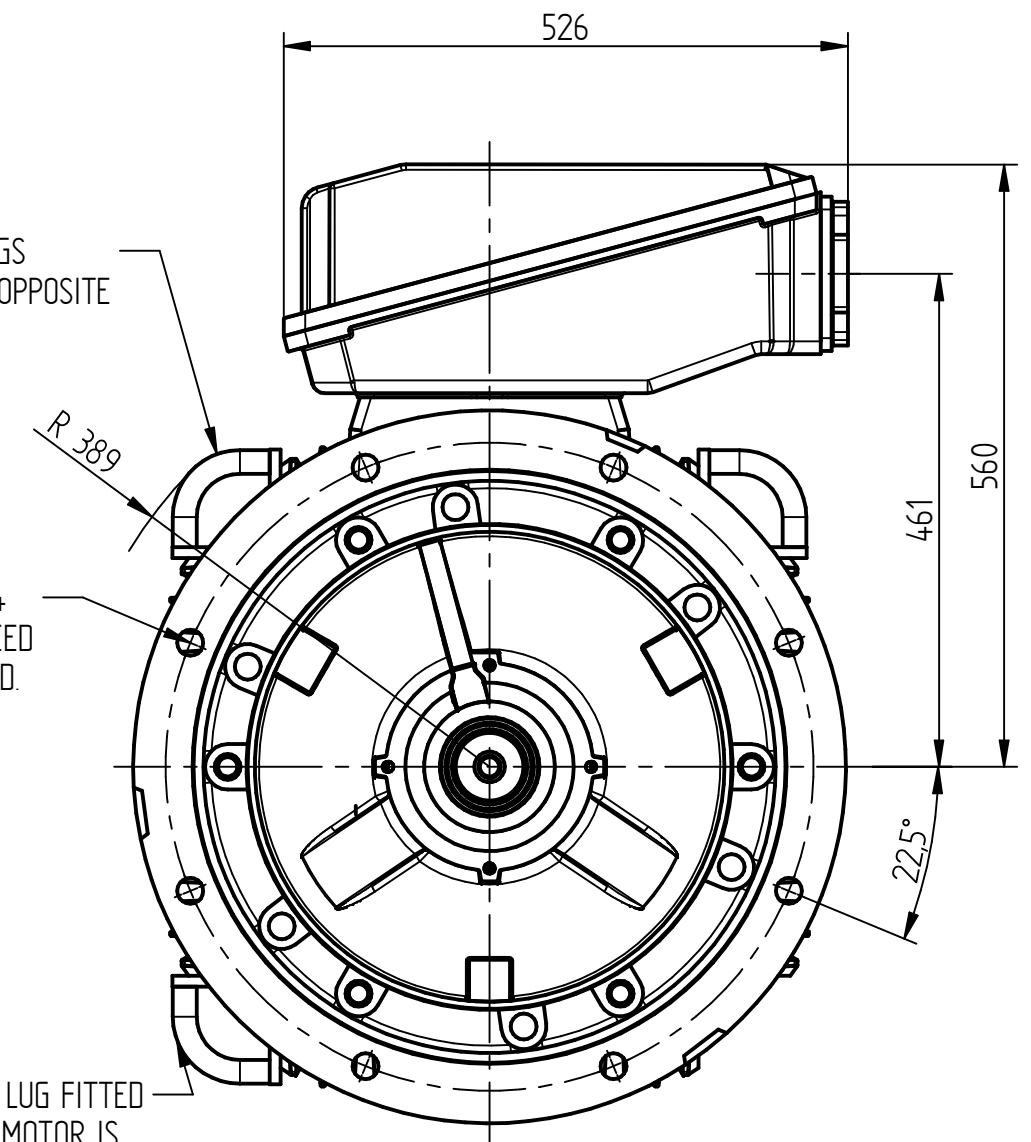

ALL DIMENSIONS IN MILLIMETERS



FIRST ANGLE
PROJECTION

**BROOK
CROMPTON**

Produced by ATB Tamel S.A. a company of **ATB**
Technology in Motion

DRG. No. WP-DF315M B5 2P

DRG. REF.

REVISION:

DATE:

SHEET
SIZE

A3

TITLE:

OUTLINE DIMENSION DRAWING TOTALLY ENCLOSED FAN COOLED
WP-DF315M 2P FRAME D FLANGE MOUNTED MOTOR

	NAME	DATE
DRAWN	SZ	30-05-19
CHECKED	PG	30-05-19
SCALE	1 : 7	