



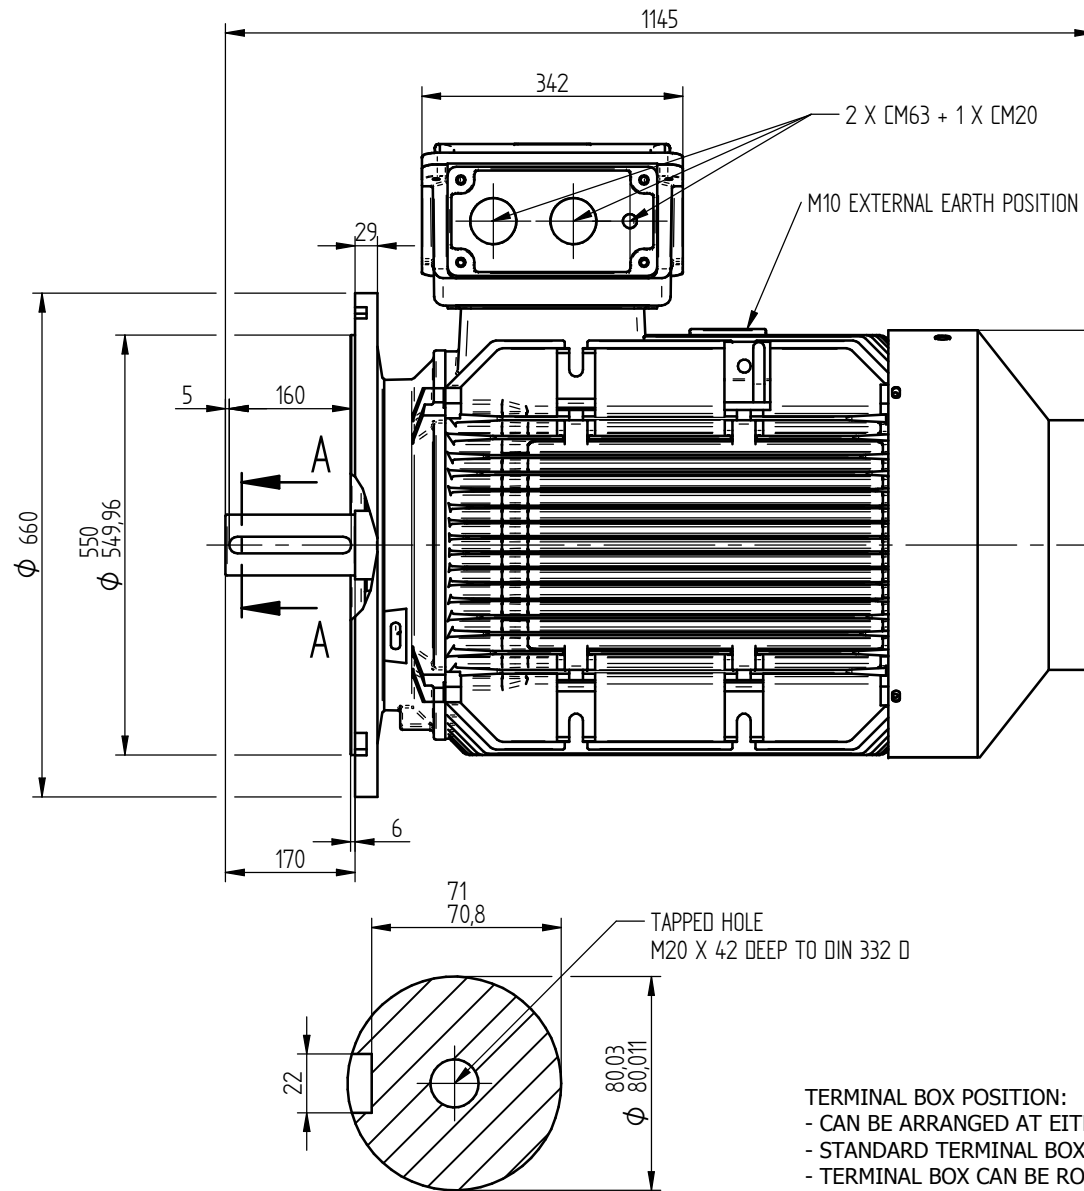

LIFTING LUGS
DIAGONALLY OPPOSITE

8 HOLES DRILL $\phi 24$
EQUALLY SPACED ON A 600 PCD.

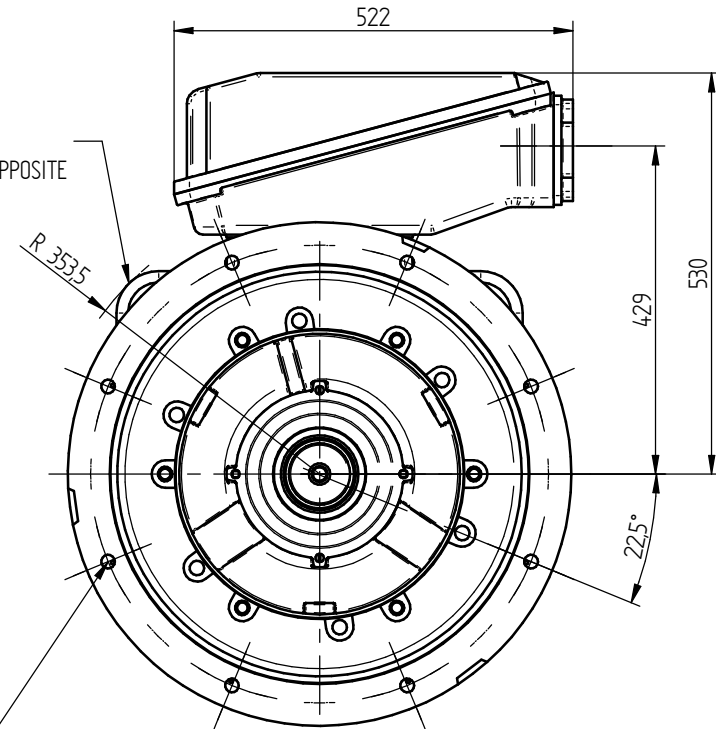

A-A
1:2

TERMINAL BOX POSITION:

- CAN BE ARRANGED AT EITHER 9, 12 OR 3 O'CLOCK.
- STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN. CONDUIT ENTRIES
- TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS (CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY).

ALL DIMENSIONS IN MILLIMETERS



FIRST ANGLE
PROJECTION

**BROOK
CROMPTON**

Produced by **Tamel s.a.** a company of **NTB**

SHEET
SIZE

A3

TITLE:

OUTLINE DIMENSION DRAWING W CAST-IRON TOTALLY ENCLOSED FAN COOLED
W-UDF315SE FRAME D FLANGE MOUNTED MOTOR, 4P

	NAME	DATE	DRG. No.
DRAWN	JS	2014-02-25	DRG. REF.
CHECKED			
SCALE	1 : 7	REVISION:	DATE: