

# MS71B-2 0,55KW 230/400V B34

## Three-phase asynchronous motor in aluminum

Motor type MS71B-2 0,55KW 230/400V B34  
Brand BUSCK  
Item number 03020725



| Voltage V | Power kW | Frequency Hz | Current A | Speed rpm |
|-----------|----------|--------------|-----------|-----------|
| 230       | 0,55     | 50           | 2,42      | 2815      |
| 400       | 0,55     | 50           | 1,39      | 2815      |
| 460       | 0,63     | 60           | 1,39      | 3378      |

Duty S1  
Enclosure IP55  
Insulation class F  
Cooling IC411 (TEFC)  
Max. ambient temp. 40°C  
Min. ambient temp. -20°C  
Max. temp. rise 80 K  
Max altitude, masl 1000

Torque, Nm 1,87  
Starting torque ratio 2,7  
Pull up torque ratio 1,8  
Pull out torque ratio 2,7  
Starting current ratio 6

Efficiency class IE1  
Efficiency, load 100% 71,6  
Efficiency, load 75% 71  
Efficiency, load 50% 66,1  
Power fact, load 100% 0,80

Painting Standard  
Color RAL 9005  
Weight kg 6  
Sound pressure Lp dB(A) 64  
Bearing DE 6202-2Z/C3  
Bearing NDE 6202-2Z/C3  
Balance grade Normal  
Inertia kgm<sup>2</sup> 0,000384  
Cable entries 1xM20

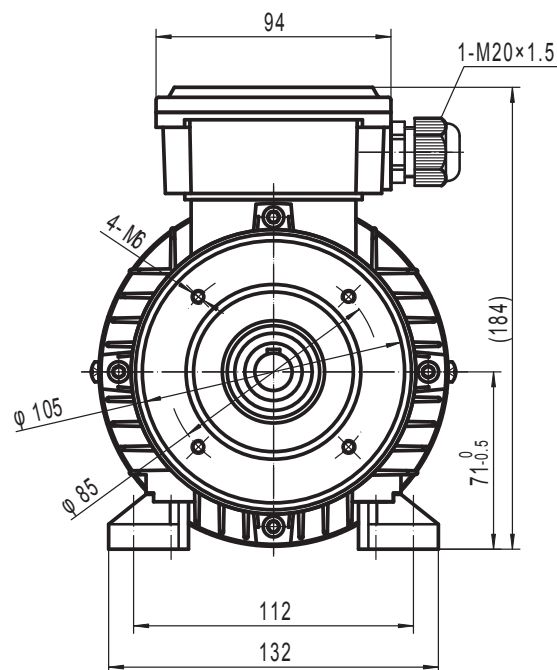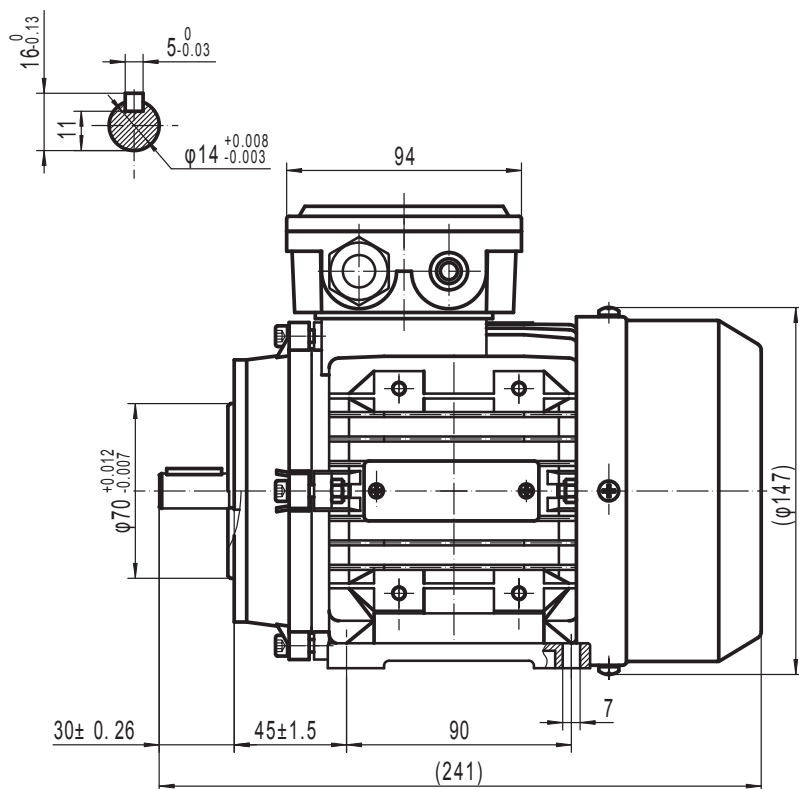

**BUSCK**  
www.busck.eu

Busck & Co AB  
Gamla Riksvägen 14  
428 32 Göteborg  
Sweden  
556027-1990  
info@busck.se

Busck & Co ApS  
Postboks 108  
0900 København C  
Denmark  
info@busck.eu

Busck AS  
Skibåsen 35C  
4636 Kristiansand  
Norway  
info@busck.no