

Three-phase asynchronous motor in cast iron

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	37	50	65,8	2920
690	37	50	37,8	2920
460	42,55	60	65,8	3504



Technical drawing of a 300W motor, showing front and top views with dimensions in millimeters.

Front View Dimensions:

- Total width: 768.5
- Total height: 400
- Base width: 368
- Base height: 110
- Motor body width: 305
- Motor body height: 399.9
- Terminal box width: 186
- Terminal box height: 22.5
- Terminal box mounting holes: 2XM40X1.5
- Motor body mounting holes: 4XØ19
- Motor body diameter: Ø350
- Motor body length: 315
- Motor body mounting holes: 4XØ19

Top View Dimensions:

- Total width: 392
- Total height: 500
- Base width: 318
- Base height: 159
- Motor body width: 305
- Motor body height: 399.9
- Terminal box width: 186
- Terminal box height: 22.5
- Terminal box mounting holes: 2XM40X1.5
- Motor body mounting holes: 4XØ19
- Motor body diameter: Ø350
- Motor body length: 315
- Motor body mounting holes: 4XØ19

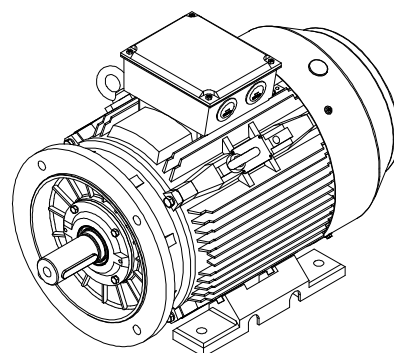

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no