

MS56A-4 0,06KW 230/400V B35

Three-phase asynchronous motor in aluminum

Motor type MS56A-4 0,06KW 230/400V B35
Brand BUSCK
Item number 03040564


Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,06	50	0,52	1400
400	0,06	50	0,30	1400
460	0,07	60	0,30	1680

Duty S1
Enclosure IP55
Insulation class F
Cooling IC411 (TEFC)
Max. ambient temp. 40°C
Min. ambient temp. -20°C
Max. temp. rise 80 K
Max altitude, masl 1000

Torque, Nm 0,40
Starting torque ratio 3,1
Pull up torque ratio 3
Pull out torque ratio 3,2
Starting current ratio 4

Efficiency class IE1
Efficiency, load 100% 52,8
Efficiency, load 75% 47,7
Efficiency, load 50% 38,7
Power fact, load 100% 0,55

Painting Standard
Color RAL 9005
Weight kg 2,9
Sound pressure Lp dB(A) 50
Bearing DE 6201-2Z/C3
Bearing NDE 6201-2Z/C3
Balance grade Normal
Inertia kgm² 0,00019
Cable entries 1xM16

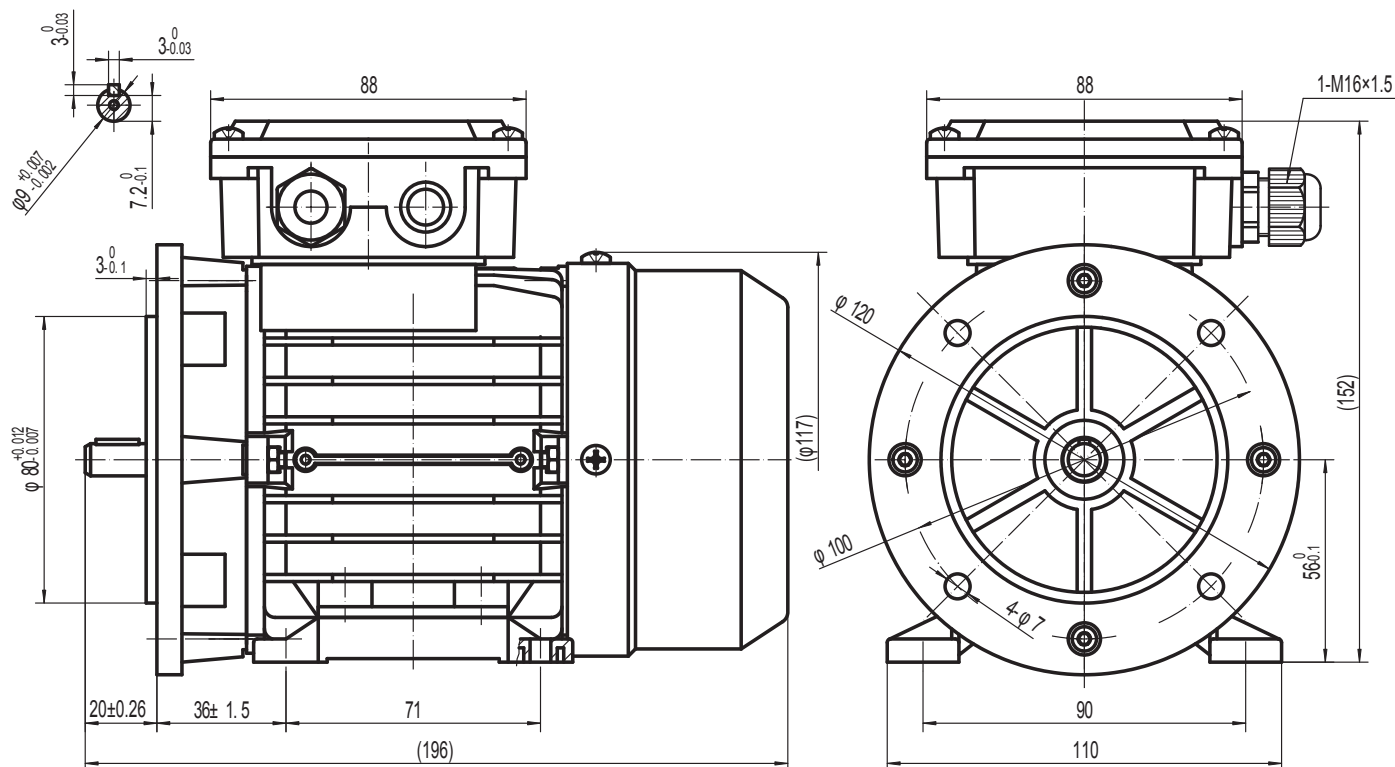

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no