

MS80B-4 0,75KW 230/400V B14

Three-phase asynchronous motor in aluminum

Motor type MS80B-4 0,75KW 230/400V B14
Brand BUSCK
Item number 03040813UL

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,86	50	3,3	1720
400	0,86	50	1,9	1720
460	0,99	60	1,9	2064


Duty S1
Enclosure IP55
Insulation class F
Cooling IC411 (TEFC)
Max. ambient temp. 40°C
Min. ambient temp. -20°C
Max. temp. rise 80 K
Max altitude, masl 1000

Torque, Nm 4,8
Starting torque ratio 3,1
Starting current ratio 6,5

Note CSA-US APPROVED

Efficiency, load 100% 82,5
Power fact, load 100% 0,70

Painting Standard
Color RAL 9005
Weight kg 9,1
Sound pressure Lp dB(A) 58
Bearing DE 6204-2Z/C3
Bearing NDE 6204-2Z/C3
Balance grade Normal
Inertia kgm² 0,0023
Cable entries 1xM20

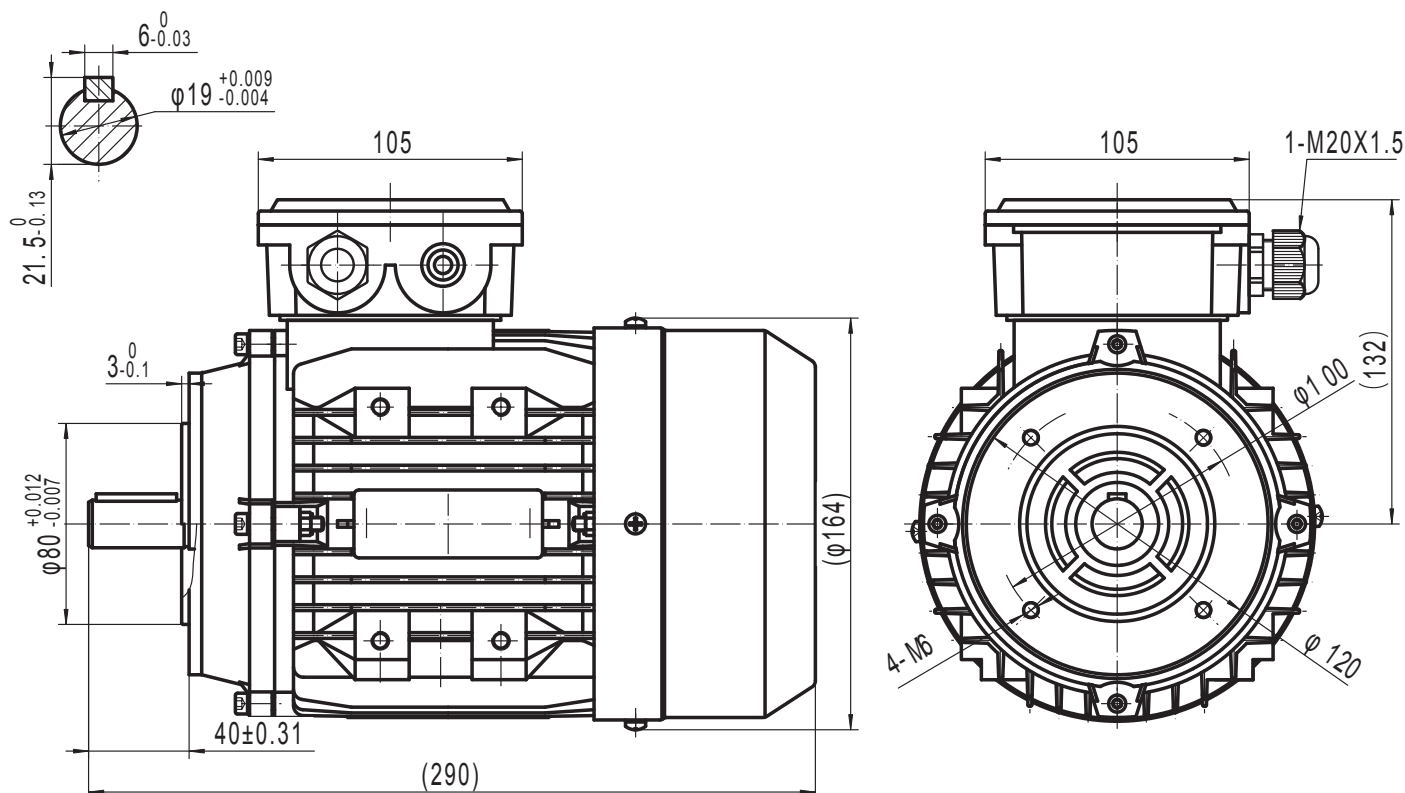

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no