

Three-phase asynchronous motor in cast iron

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	11	50	87,6	1440
690	11	50	50,4	1440
460	12,65	60	87,6	1728



Technical drawing of a 3-phase asynchronous motor, showing front and top views with dimensions.

Front View Dimensions:

- Total width: 605
- Total height: 350
- Flange diameter: $\varnothing 350$
- Flange thickness: 16
- Flange mounting hole diameter: $\varnothing 250$
- Flange mounting hole pitch circle diameter: 281.5
- Flange mounting hole diameter: 2XM32X1.5
- Flange mounting hole offset: 162
- Flange mounting hole offset: 90
- Flange mounting hole offset: 5
- Flange mounting hole offset: 110
- Flange mounting hole offset: 108
- Flange mounting hole offset: 26.5
- Flange mounting hole offset: 210
- Flange mounting hole offset: 263
- Flange mounting hole offset: 605

Top View Dimensions:

- Total width: 316
- Total height: 404
- Flange diameter: $\varnothing 300$
- Flange thickness: 17.5
- Flange mounting hole diameter: 4X $\varnothing 19$
- Flange mounting hole pitch circle diameter: 187
- Flange mounting hole offset: 90
- Flange mounting hole offset: 45°
- Flange mounting hole offset: 90°
- Flange mounting hole offset: 127
- Flange mounting hole offset: 254
- Flange mounting hole offset: 316

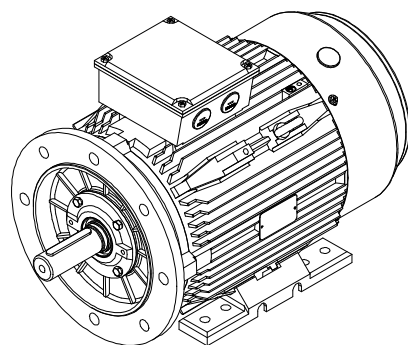

BUSCK
www.busck.eu

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no