


Three-phase asynchronous motor in aluminum

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,25	50	1,84	680
400	0,25	50	1,06	680
460	0,29	60	1,06	816

Painting	Standard
Color	RAL 9005
Weight kg	10,1
Sound pressure Lp dB(A)	52
Bearing DE	6204-2Z/C3
Bearing NDE	6204-2Z/C3
Balance grade	Normal
Inertia kgm ²	0,0025
Cable entries	1xM20

Technical drawing of a mechanical assembly, likely a valve or actuator, showing a side view and a top view. The side view includes dimensions: a total width of 290, a central body width of 105, a mounting bracket width of 40 ± 0.31, and a total height of 164 (indicated as φ164). The central body has a height of 80 (+0.012, -0.007) and a mounting bracket height of 3 (-0.1, 0). The top view shows a circular base with a diameter of 19 (+0.009, -0.004) and a central hole with a diameter of 6 (-0.03, 0). The drawing also shows various internal components, including a central shaft and a mounting bracket.

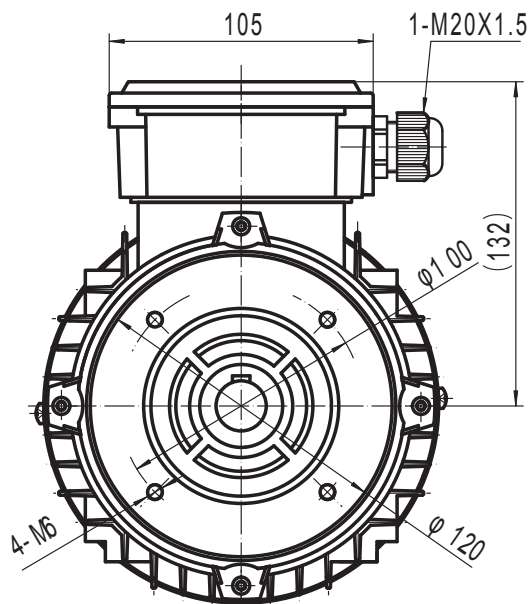

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no