

# MS80B-6 0,55KW 500V B34

## Three-phase asynchronous motor in aluminum

Motor type MS80B-6 0,55KW 500V B34  
Brand BUSCK  
Item number 03C60815

| Voltage V | Power kW | Frequency Hz | Current A | Speed rpm |
|-----------|----------|--------------|-----------|-----------|
| 500       | 0,55     | 50           | 1,51      | 920       |
| 575       | ,63      | 60           | 1,51      | 1104      |


Duty S1  
Enclosure IP55  
Insulation class F  
Cooling IC411 (TEFC)  
Max. ambient temp. 40°C  
Min. ambient temp. -20°C  
Max. temp. rise 80 K  
Max altitude, masl 1000

Torque, Nm 5,7  
Starting torque ratio 2,25  
Pull up torque ratio 2,05  
Pull out torque ratio 2,45  
Starting current ratio 4,3

Efficiency class IE1  
Efficiency, load 100% 72,5  
Efficiency, load 75% 73,0  
Efficiency, load 50% 69,3  
Power fact, load 100% 0,73

Painting Standard  
Color RAL 9005  
Weight kg 9,6  
Sound pressure Lp dB(A) 56  
Bearing DE 6204-2Z/C3  
Bearing NDE 6204-2Z/C3  
Balance grade Normal  
Inertia kgm<sup>2</sup> 0,002098  
Cable entries 1xM20

Note Termokontakter

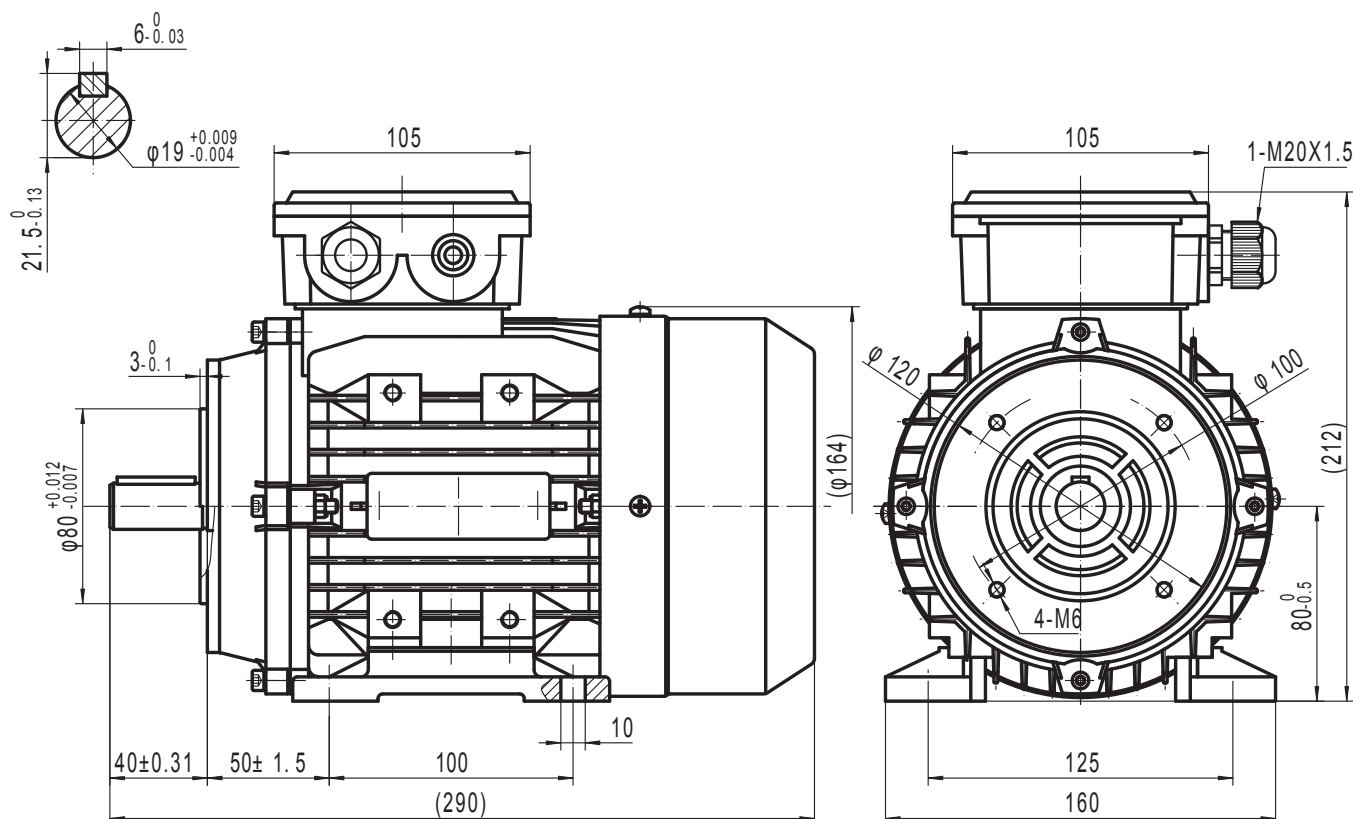

**BUSCK**  
www.busck.eu

Busck & Co AB  
Gamla Riksvägen 14  
428 32 Göteborg  
Sweden  
556027-1990  
info@busck.se

Busck & Co ApS  
Postboks 108  
0900 København C  
Denmark  
info@busck.eu

Busck AS  
Skibåsen 35C  
4636 Kristiansand  
Norway  
info@busck.no