


MS160L-2 18,5KW 180/310V B3

Three-phase asynchronous motor in aluminum

Motor type MS160L-2 18,5KW 180/310V B3
Brand BUSCK
Item number 03D21621

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	18,5	50		
690	18,5	50		
460	21,28	60		

Duty	S1	Efficiency class	EFF2
Enclosure	IP55	Painting	Standard
Insulation class	F	Color	RAL 9005
Cooling	IC411 (TEFC)	Weight kg	92,3
Max. ambient temp.	40°C	Bearing DE	6309-2Z/C3
Min. ambient temp.	-20°C	Bearing NDE	6309-2Z/C3
Max. temp. rise	80 K	Balance grade	Normal
Max altitude, masl	1000	Cable entries	2xM32 + 1xM16

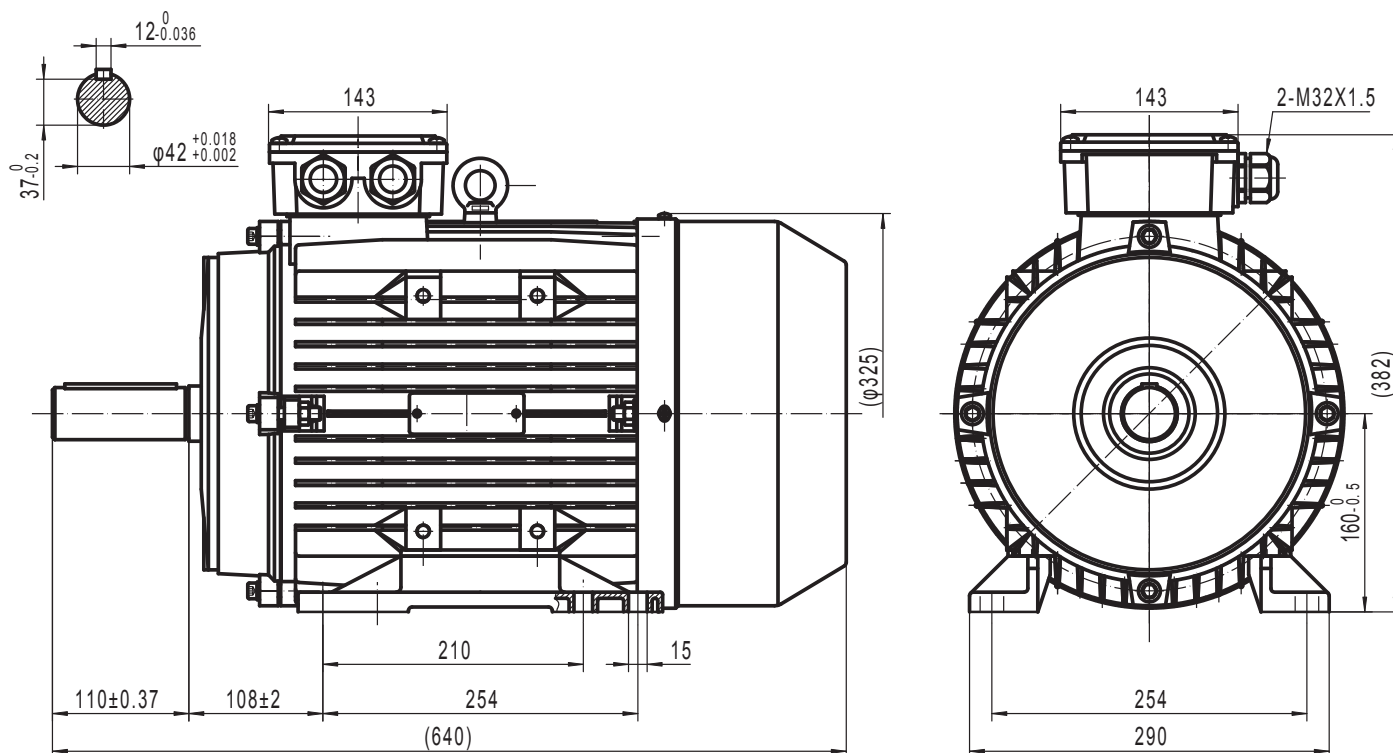

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no