

Type : 2EL080M6B-PA-A0-000

Date : 03.01.2022

|                                    |                 |                            |                 |
|------------------------------------|-----------------|----------------------------|-----------------|
| Power [kW]                         | : 0.55          | Efficiency Class           | : IE2           |
| Input Voltage [V]                  | : 400           | Duty Cycle                 | : S1            |
| Connection Type [ $\Delta$ / Y]    | : Y             | Service Factor             | : 1.15          |
| Frequency [Hz]                     | : 50            | Frame Size                 | : 080M          |
| Pole Number                        | : 6             | Weight [kg]                | : 9.90          |
| Nominal Speed [rpm]                | : 932           | Insulation Class           | : F [155°C]     |
| Nominal Current [A]                | : 1.50          | Temperature Rise           | : B [80°K]      |
| Nominal Moment [Nm]                | : 5.64          | Protection Class           | : IP55          |
| Nominal Efficiency [ $\eta$ ]      | : 73.5          | Vibration Severity Grade   | : A             |
| Power Factor [ $\cos\phi$ ]        | : 0.72          | Method of Cooling          | : IC411         |
| Locked Rotor Current [ $I_a/I_n$ ] | : 4.2           | Direction of Rotation      | : Bidirectional |
| Locked Rotor Torque [Ma/Mn]        | : 2.1           | Balance                    | : Half Key      |
| Breakdown Torque [Mk/Mn]           | : 2.6           | Motor Protection           | : --            |
| Motor Color                        | : RAL 7031      | Altitude Above Sea Level   | : 1000m         |
| Ambient Temperature                | : -15°C / +40°C | Sound Pressure Level [dBA] | : 45            |

### ELECTRICAL DATA

| $\Delta$ / Y | U [V] | f [Hz] | P [kW] | n [rpm] | I [A] | $\eta$ [%] | $\cos\phi$ |
|--------------|-------|--------|--------|---------|-------|------------|------------|
| $\Delta$     | 230   | 50     | 0.55   | 932     | 2.60  | 73.5       | 0.72       |
| Y            | 400   | 50     | 0.55   | 932     | 1.50  | 73.5       | 0.72       |
| Y            | 460   | 60     | 0.64   | 1135    | 1.47  | 74.6       | 0.73       |


### MECHANICAL DATA

|                                       |                   |
|---------------------------------------|-------------------|
| Moment of Inertia [kgm <sup>2</sup> ] | : 0.00202         |
| Bearing DS / NS                       | : 6204ZZ / 6204ZZ |
| Frame Material                        | : Aluminum        |
| Flange Type / Material                | : B35 / Aluminum  |
| Cooling Fan Material                  | : Plastic         |
| End Shield Material                   | : Aluminum        |

### TERMINAL BOX

|                          |            |
|--------------------------|------------|
| Terminal Box Material    | : Aluminum |
| Terminal Box Position    | : Top      |
| Terminal Box Cable Entry | : M20x1.5  |
| Terminal Box Blind Cap   | : M16x1.5  |
| Contact Screw Thread     | : M4       |

### MECHANICAL DIMENSIONS

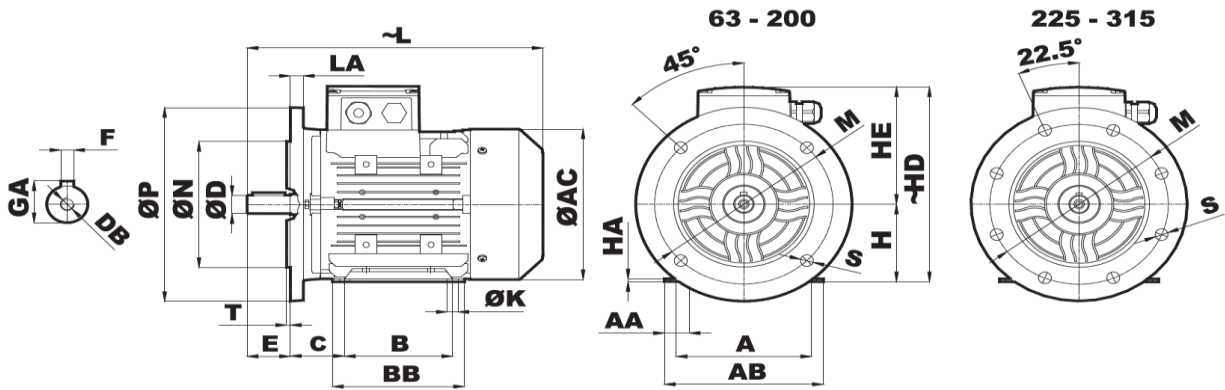

| FLANGE TYPE | D  | E  | N   | P   | T   | LA | L   | AC  | S  | M   | H  | HE  | HD  | F | GA   | DB | C  | ØK | B   | BB  | HA | AA | A   | AB  |
|-------------|----|----|-----|-----|-----|----|-----|-----|----|-----|----|-----|-----|---|------|----|----|----|-----|-----|----|----|-----|-----|
| B35         | 19 | 40 | 130 | 200 | 3.5 | 12 | 274 | 155 | 12 | 165 | 80 | 123 | 203 | 6 | 21.5 | M6 | 50 | 10 | 100 | 122 | 3  | 25 | 125 | 148 |

Manufactured and tested in accordance with IEC 60034

FR.AG.010 REV. NO: 03 REV TARİHİ : 01.01.2021

\*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

\*ELK Motor has right to change all the data without prior notice.