

T4A132SB-2 7,5KW 400/690V B14

Three-phase asynchronous motor in aluminum

Motor type T4A132SB-2 7,5KW 400/690V B14
 Brand BUSCK
 Item number 43021333

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	7,5	50	13,3	2940
690	7,5	50	7,65	2940
460	8,63	60	13,3	3528


Duty S1
 Enclosure IP55
 Insulation class F
 Cooling IC411 (TEFC)
 Max. ambient temp. 45°C
 Min. ambient temp. -20°C
 Max. temp. rise 80 K
 Max altitude, masl 1000

Torque, Nm 25,383
 Starting torque ratio 3,8
 Pull up torque ratio 4,1
 Pull out torque ratio 2,3
 Starting current ratio 10,0
 This motor has DNV type approval

Efficiency class IE4
 Efficiency, load 100% 91,7
 Efficiency, load 75% 91,7
 Efficiency, load 50% 90,7
 Power fact, load 100% 0,91

Painting Standard
 Color RAL 9005
 Weight kg 59
 Sound pressure Lp dB(A) 80
 Bearing DE 6308-2Z/C3
 Bearing NDE 6208-2Z/C3
 Balance grade Normal
 Inertia kgm² 0,02288
 Cable entries 2xM25, 1xM16

Note Termokontakt
 IE4

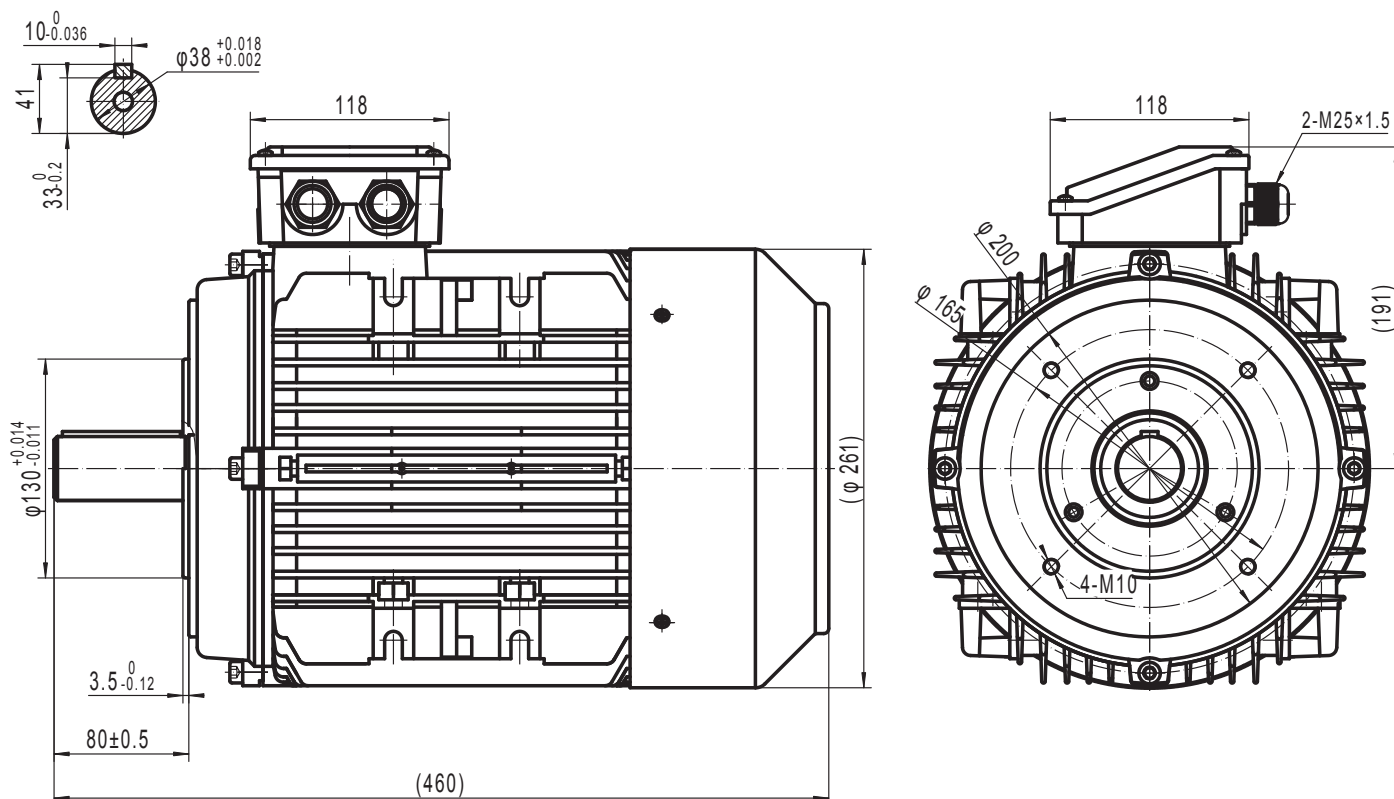

BUSCK
 www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
 info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
 info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
 info@busck.no