




SSWE160MA-2 11KW 400/690V B5

Three-phase asynchronous motor in cast iron

Motor type SSWE160MA-2 11KW 400/690V B5
Brand BUSCK
Item number 43021602w

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	11	50	19,9	2945
690	11	50	11,44	2945
460	12,65	60	19,9	3534

Duty	S1	Efficiency class	IE4
Enclosure	IP55	Efficiency, load 100%	92,6
Insulation class	F	Efficiency, load 75%	92,5
Cooling	IC411 (TEFC)	Efficiency, load 50%	91,0
Max. ambient temp.	40°C	Power fact, load 100%	0,88
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	113
Torque, Nm	36	Sound pressure Lp dB(A)	69
Starting torque ratio	2,2	Bearing DE	6209-2Z/C3
Starting current ratio	7,8	Bearing NDE	6209-2Z/C3
Winding protection	Thermistors	Balance grade	Normal
		Inertia kgm ²	0,066
Note	IE4, Kopplingslåda med kabelanslutning Färg svart		

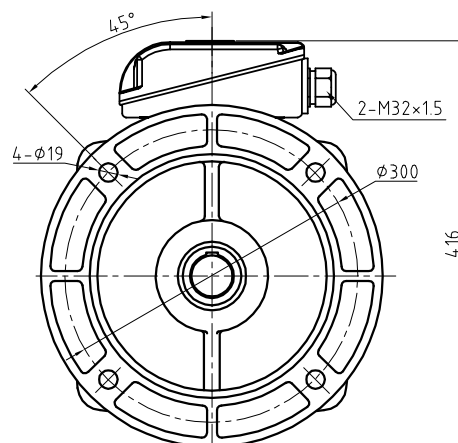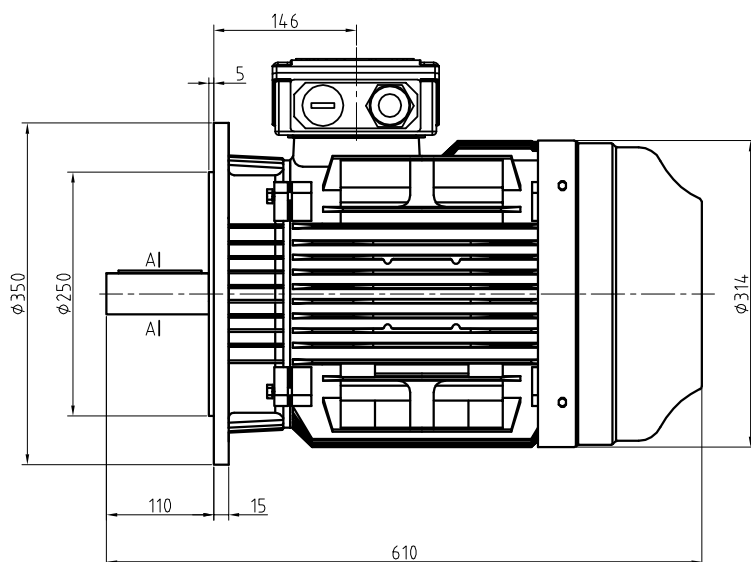

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no