

T4CR180M-2 22KW 400/690V B3




Three-phase asynchronous motor in cast iron

Motor type T4CR180M-2 22KW 400/690V B3
 Brand BUSCK
 Item number 43021801T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	22	50	38,0	2965
690	22	50	21,8	2965
460	25,3	60	38,0	3558

Duty	S1	Efficiency class	IE4
Enclosure	IP55	Efficiency, load 100%	94
Insulation class	F	Efficiency, load 75%	94,2
Cooling	IC411 (TEFC)	Efficiency, load 50%	93,8
Max. ambient temp.	40°C	Power fact, load 100%	0,89
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	220
Torque, Nm	70,9	Sound pressure Lp dB(A)	83
Starting torque ratio	2	Bearing DE	6311 C3
Pull up torque ratio	1,1	Bearing NDE	6311 C3
Pull out torque ratio	2,3	Balance grade	Normal
Starting current ratio	9,5	Inertia kgm2	0,16327152862
		Cable entries	2xM32, 1xM16

Note IE4 Förstärkt isolation

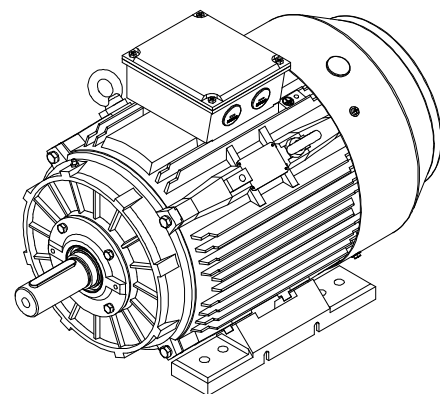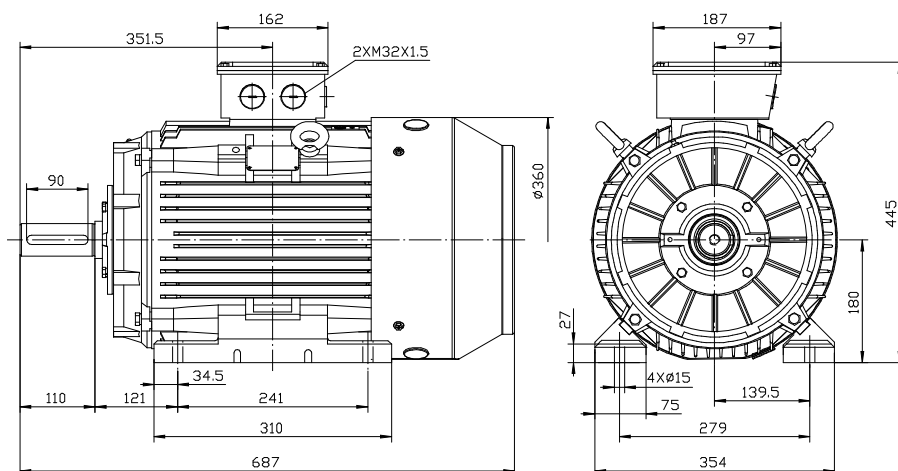

TC 180M B3

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no