


T4CR280M-2 90KW 400/690V B3

Single-phase asynchronous motor in aluminum

Motor type T4CR280M-2 90KW 400/690V B3
Brand BUSCK
Item number 43022811T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	90	50	152,4	2980
690	90	50	87,6	2980
460	103,5	60	152,4	3576

Duty	S1	Efficiency class	IE4
Enclosure	IP55	Efficiency, load 100%	95,8
Insulation class	F	Efficiency, load 75%	95,9
Cooling	IC411 (TEFC)	Efficiency, load 50%	95,2
Max. ambient temp.	45°C	Power fact, load 100%	0,89
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
Torque, Nm	288,55	Weight kg	700
Starting torque ratio	1,8	Sound pressure Lp dB(A)	91
Pull up torque ratio	0,9	Bearing DE	6316 C3
Pull out torque ratio	2,3	Bearing NDE	6316 C3
Starting current ratio	8,5	Balance grade	Normal
This motor has DNV type approval		Inertia kgm2	1,4946914066
Note	IE4	Cable entries	2xM63, 1xM16

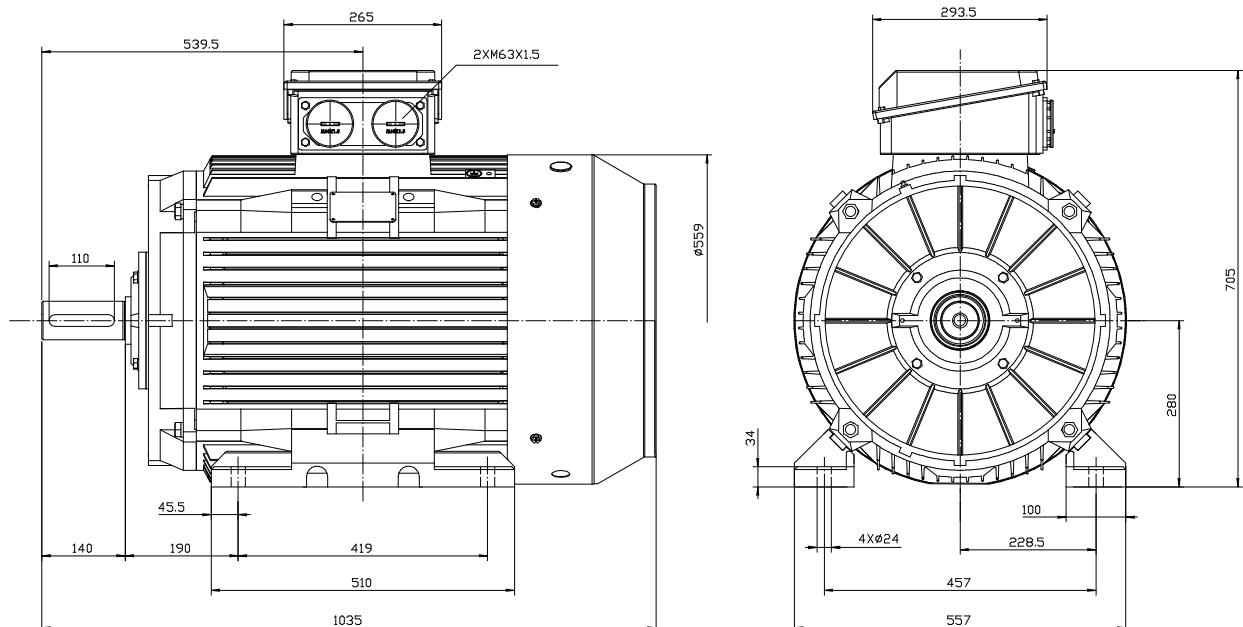

TC 280M-2P B3

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no