

SSWE315LB-4 200KW 400/690V B35

Three-phase asynchronous motor in cast iron


Motor type SSWE315LB-4 200KW 400/690V B35
 Brand BUSCK
 Item number 43043184

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	200	50	332,0	1490
690	200	50	190,9	1490
460	230	60	332,0	1788

Duty	S1	Efficiency class	IE4
Enclosure	IP55	Efficiency, load 100%	96,7
Insulation class	F	Efficiency, load 75%	96,5
Cooling	IC411 (TEFC)	Efficiency, load 50%	95,6
Max. ambient temp.	40°C	Power fact, load 100%	0,89
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	1223
Torque, Nm	1282	Sound pressure Lp dB(A)	74
Starting torque ratio	2,1	Bearing DE	6319
Starting current ratio	7,9	Bearing NDE	6319
Winding protection	Thermistors	Balance grade	Normal
		Inertia kgm ²	5,16
		Cable entries	2xM63, 1xM16

Note

Axel 90x170
 IE4, Kopplingslåda med FL21, 2xM63 + 1 x M16
 Färg svart
 Kullager DE

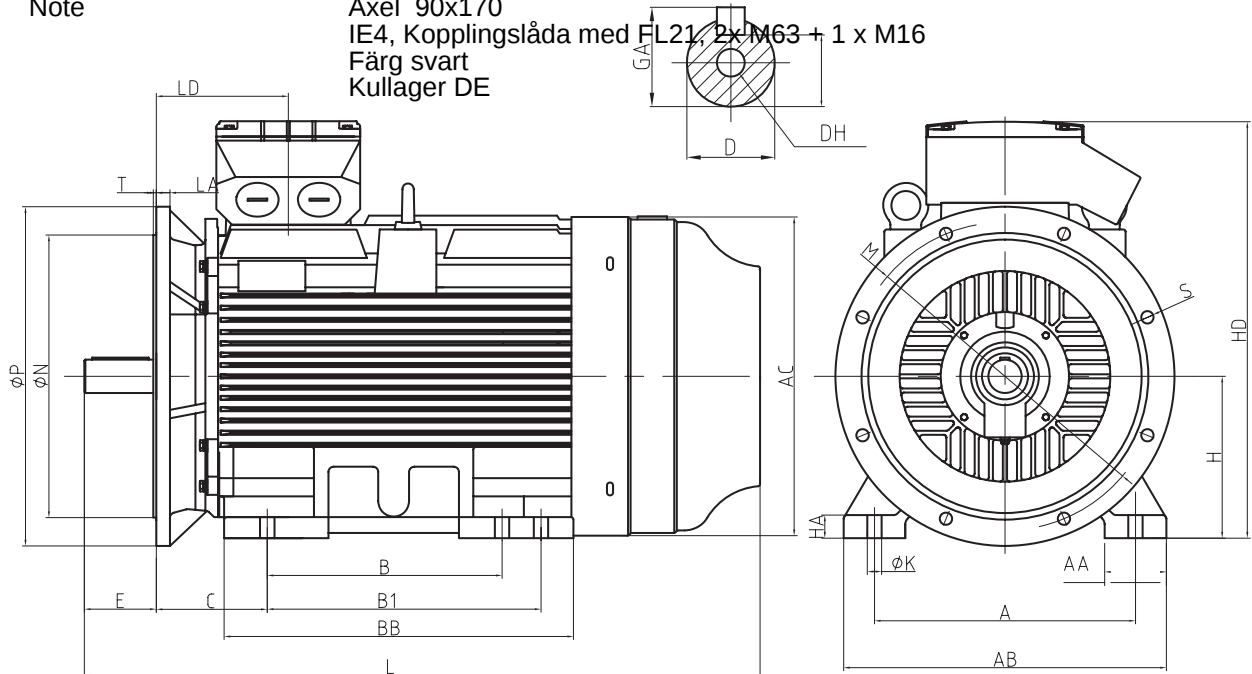

A	B	B1	C	H	D	E	F	GA	DH	M	N	P	AB	AC	HA	HD	BB	LD	L
508	457	508	216	315	90	170	25		M20	600	550	660	628	680		680			1385