

T4C355LC-4 355KW 400/690V B3


Three-phase asynchronous motor in cast iron

Motor type T4C355LC-4 355KW 400/690V B3
 Brand BUSCK
 Item number 43043571RLT

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	355	50	569,0	1485
690	355	50	327,2	1485
460	408,25	60	569,0	1782

Duty	S1	Efficiency class	IE4
Enclosure	IP55	Efficiency, load 100%	96,7
Insulation class	F	Efficiency, load 75%	96,8
Cooling	IC411 (TEFC)	Efficiency, load 50%	96
Max. ambient temp.	40°C	Painting	Standard
Min. ambient temp.	-20°C	Color	RAL 9005
Max. temp. rise	80 K	Weight kg	0
Max altitude, masl	1000	Bearing DE	NU322 C3
Torque, Nm	2283,99	Bearing NDE	6322 C3
Starting torque ratio	2,2	Balance grade	Normal
Pull up torque ratio	2	Cable entries	2xM63, 1xM16
Pull out torque ratio	3		
Starting current ratio	8		
This motor has DNV type approval			

Note IE4, Rullager
 Axel 100x210

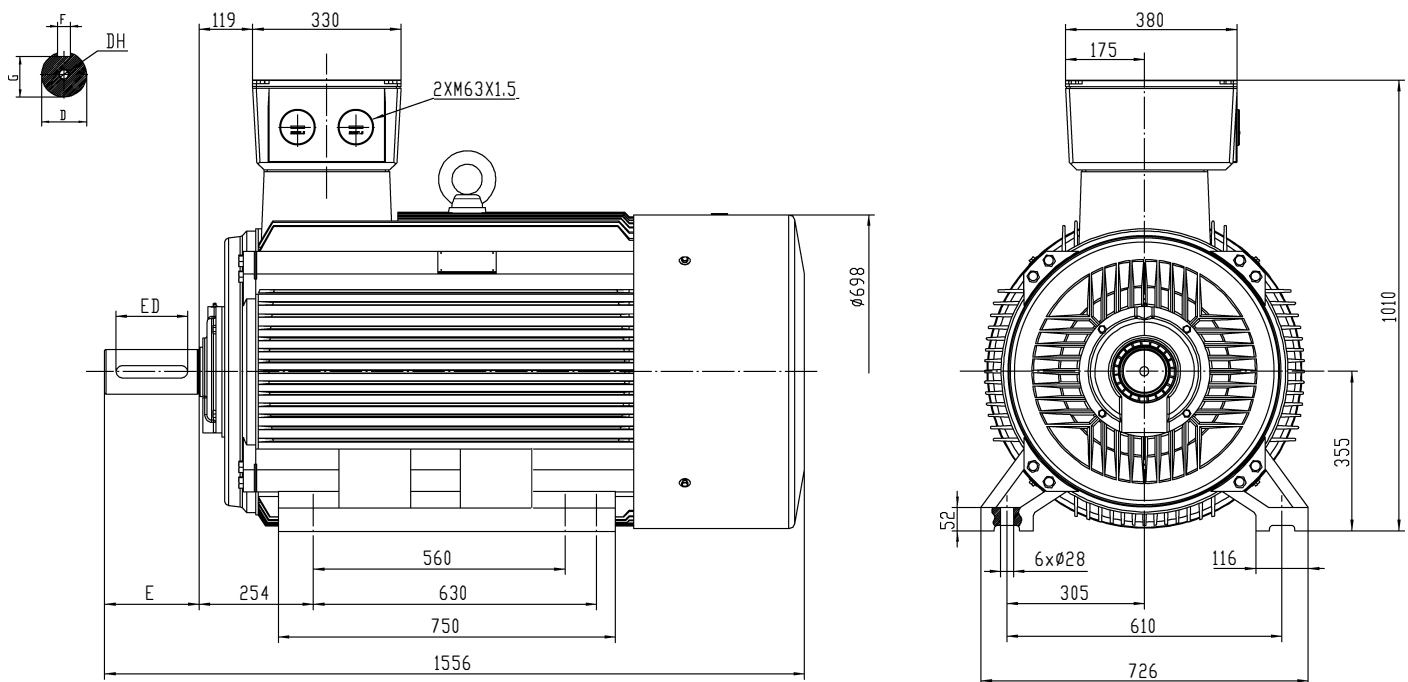

TYPE	D	E	F	G	DH	ED	L	
Y2-355M/L-4/6/8P	Ø100	210	28-Ø.052	90	M24x50	160	1570	Long shaft

BUSCK
 www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
 info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
 info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
 info@busck.no