

T4C355LD-4 400KW 400/690V B3

Three-phase asynchronous motor in cast iron


Motor type T4C355LD-4 400KW 400/690V B3
 Brand BUSCK
 Item number 43043581RLT

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	400	50	641,2	1485
690	400	50	368,7	1485
460	460	60	641,2	1782

Duty	S1	Efficiency class	IE4
Enclosure	IP55	Efficiency, load 100%	96,7
Insulation class	F	Efficiency, load 75%	96,8
Cooling	IC411 (TEFC)	Efficiency, load 50%	96
Max. ambient temp.	40°C	Power fact, load 100%	0,90
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	2000
Torque, Nm	2573,51	Bearing DE	NU322 C3
Starting torque ratio	2,2	Bearing NDE	6322 C3
Pull up torque ratio	2	Balance grade	Normal
Pull out torque ratio	3	Cable entries	2xM63, 1xM16
Starting current ratio	8		

This motor has DNV type approval

Note IE4 Rullager
 PT100 i lagersäten
 Axel 100x210 mm

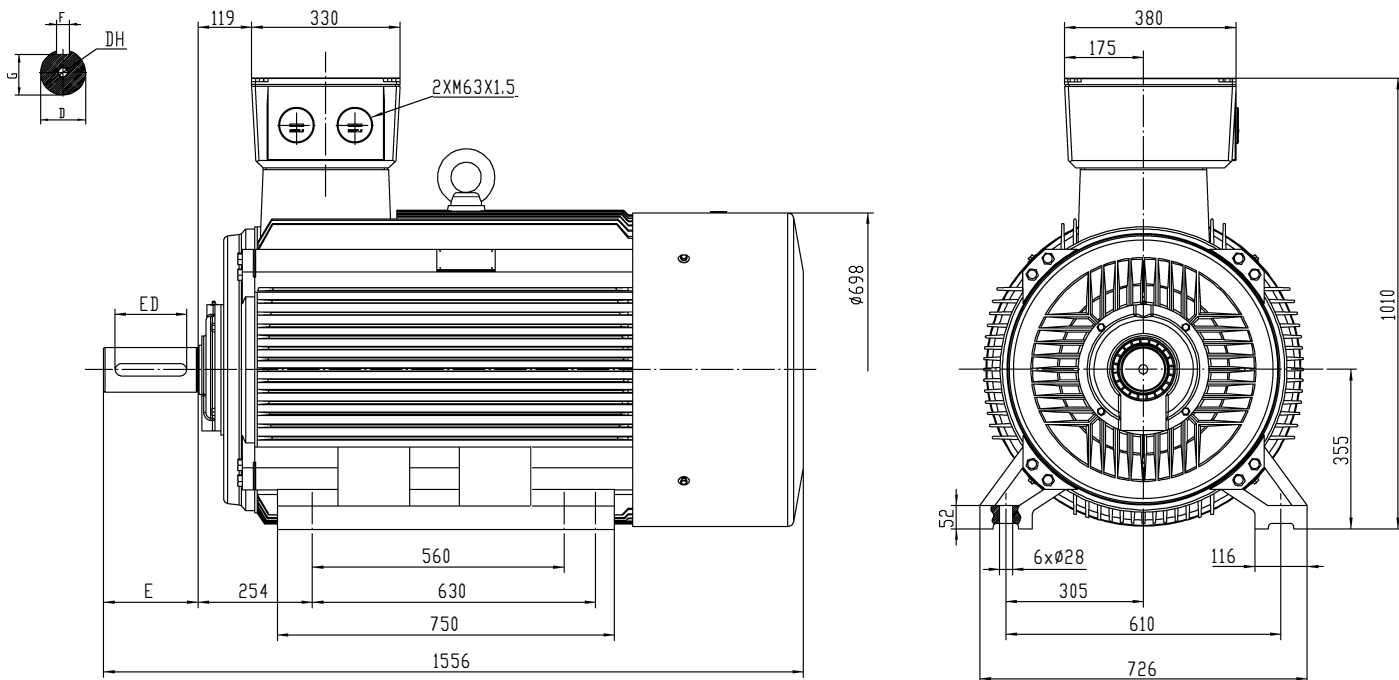

TYPE	D	E	F	G	DH	ED	L	
Y2-355M/L-4/6/8P	∅100	210	28- $\frac{0.052}{0.052}$	90	M24x50	160	1570	Long shaft

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no