

T4C355LD-4 400KW 400/690V B3


Three-phase asynchronous motor in cast iron

Motor type T4C355LD-4 400KW 400/690V B3
Brand BUSCK
Item number 43043581T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	400	50	641,2	1485
690	400	50	368,7	1485
460	460	60	641,2	1782

Duty	S1	Efficiency class	IE4
Enclosure	IP55	Efficiency, load 100%	96,7
Insulation class	F	Efficiency, load 75%	96,8
Cooling	IC411 (TEFC)	Efficiency, load 50%	96
Max. ambient temp.	40°C	Power fact, load 100%	0,90
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	0
Torque, Nm	2573,51	Bearing DE	NU322 C3
Starting torque ratio	2,2	Bearing NDE	6322 C3
Pull up torque ratio	2	Balance grade	Normal
Pull out torque ratio	3	Cable entries	2xM63, 1xM16
Starting current ratio	8		

Note IE4 Rullager

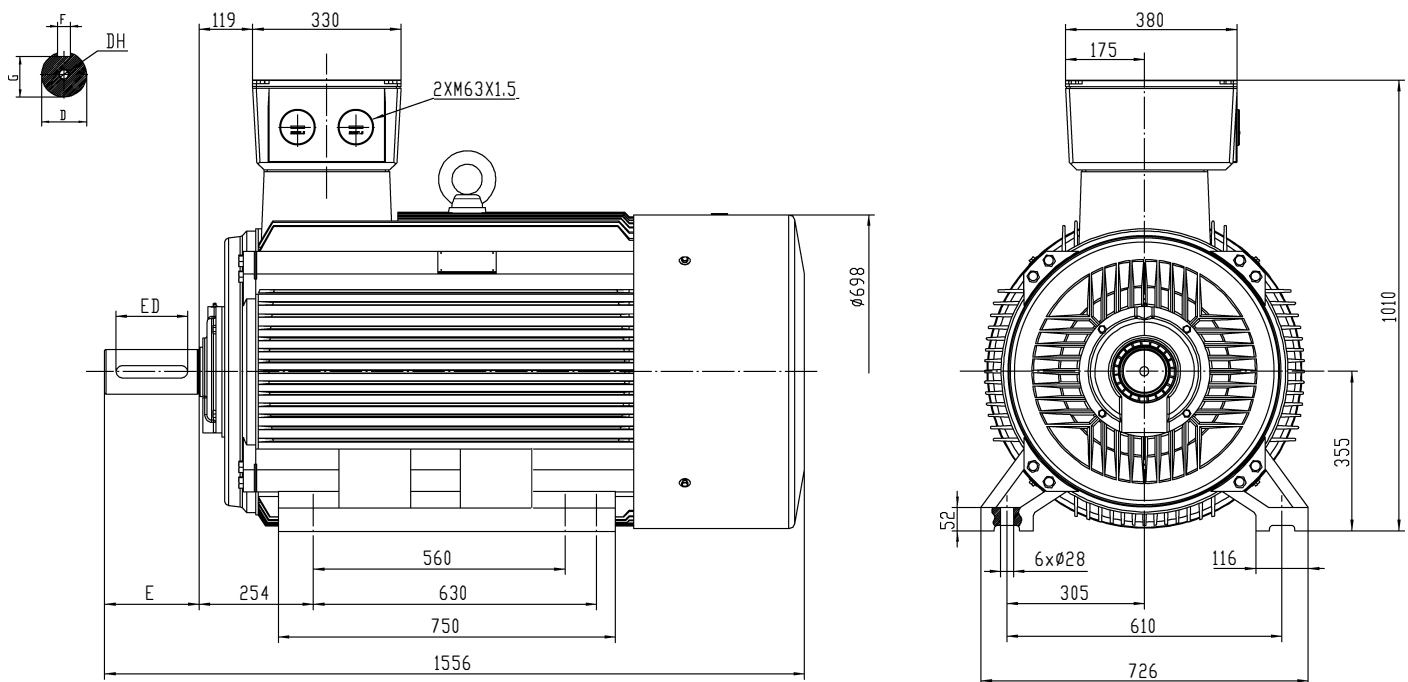

TYPE	D	E	F	G	DH	ED	L	
Y2-355M/L-4/6/8P	Ø100	210	28-Ø.052	90	M24x50	160	1570	Long shaft

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no