

T4CR200LB-6 22KW 400/690V B3




Single-phase asynchronous motor in aluminum

Motor type T4CR200LB-6 22KW 400/690V B3
Brand BUSCK
Item number 43062011T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	22	50	41,8	975
690	22	50	24,1	975
460	25,3	60	41,8	1170

Duty	S1	Efficiency class	IE4
Enclosure	IP55	Efficiency, load 100%	93,7
Insulation class	F	Efficiency, load 75%	93,9
Cooling	IC411 (TEFC)	Efficiency, load 50%	93,6
Max. ambient temp.	45°C	Power fact, load 100%	0,81
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
Torque, Nm	215,6	Weight kg	271
Starting torque ratio	2	Sound pressure Lp dB(A)	73
Pull up torque ratio	1,2	Bearing DE	6312 C3
Pull out torque ratio	2,1	Bearing NDE	6312 C3
Starting current ratio	8,5	Balance grade	Normal
This motor has DNV type approval		Inertia kgm2	0,56824533646
		Cable entries	2xM50, 1xM16

Note IE4

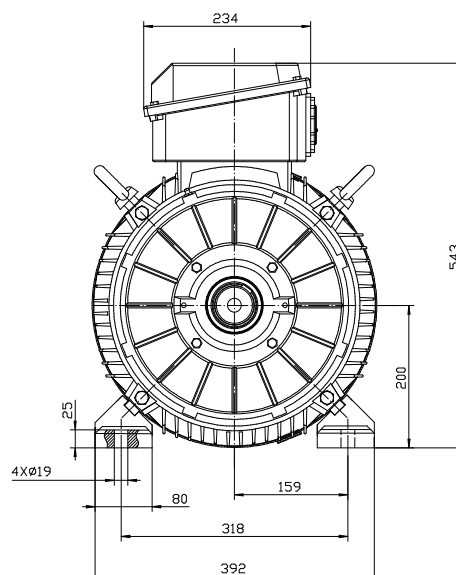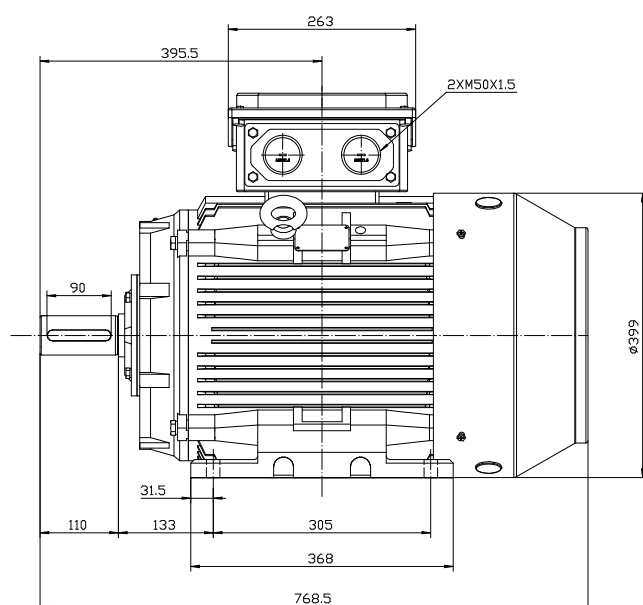

TC 200L B3

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no