

SSWE355MB-6 200KW 400/690V B3


Three-phase asynchronous motor in cast iron

Motor type SSWE355MB-6 200KW 400/690V B3
Brand BUSCK
Item number 43063561RL

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	200	50	353,0	995
690	200	50	203,0	995
460	230	60	353,0	1194

Duty	S1	Efficiency class	IE4
Enclosure	IP55	Efficiency, load 100%	96,3
Insulation class	F	Efficiency, load 75%	96,3
Cooling	IC411 (TEFC)	Efficiency, load 50%	96,0
Max. ambient temp.	40°C	Power fact, load 100%	0,85
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	1905
Torque, Nm	1920	Sound pressure Lp dB(A)	70
Starting torque ratio	2,0	Bearing DE	NU322
Pull out torque ratio	2,4	Bearing NDE	6322
Starting current ratio	7,3	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm2	11,5
		Cable entries	2xM63, 1xM16

Note IE4, Kopplingslåda med FL33, 2x M63 + 1 x M16
Färg svart
Rullager på drivsidan

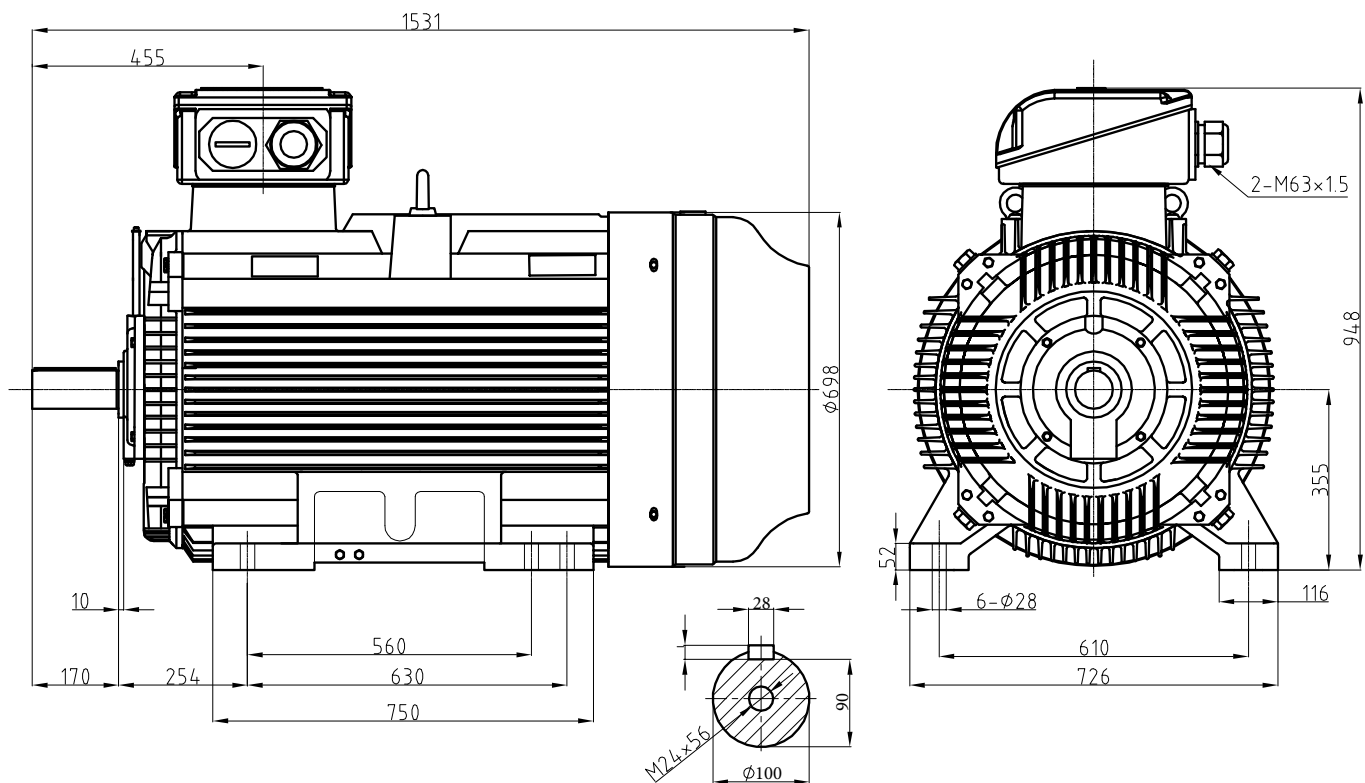

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no