

T632-4 0,18kW 230/400V B14


Three-phase asynchronous motor in aluminum

Motor type T632-4 0,18kW 230/400V B14
Brand BUSCK
Item number 83040643UL

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,18	50	0,96	1350
400	0,18	50	0,55	1350
460	0,21	60	0,55	1620

Duty	S1	Efficiency class	IE2
Enclosure	IP55	Efficiency, load 100%	64,7
Insulation class	F	Efficiency, load 75%	64,9
Cooling	IC411 (TEFC)	Efficiency, load 50%	60,3
Max. ambient temp.	45°C	Power fact, load 100%	0,73
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	4,3
Torque, Nm	1,27	Sound pressure Lp dB(A)	52
Starting torque ratio	2	Bearing DE	6201 2RZ C3
Pull up torque ratio	1,9	Bearing NDE	6201 2RZ C3
Pull out torque ratio	2,1	Balance grade	Normal
Starting current ratio	3,6	Inertia kgm ²	0,00034
Winding protection	Thermocontact	Cable entries	1xM20

Note 0,18kW 460VY
UL recognized, 8-hole flange,
Thermocontact

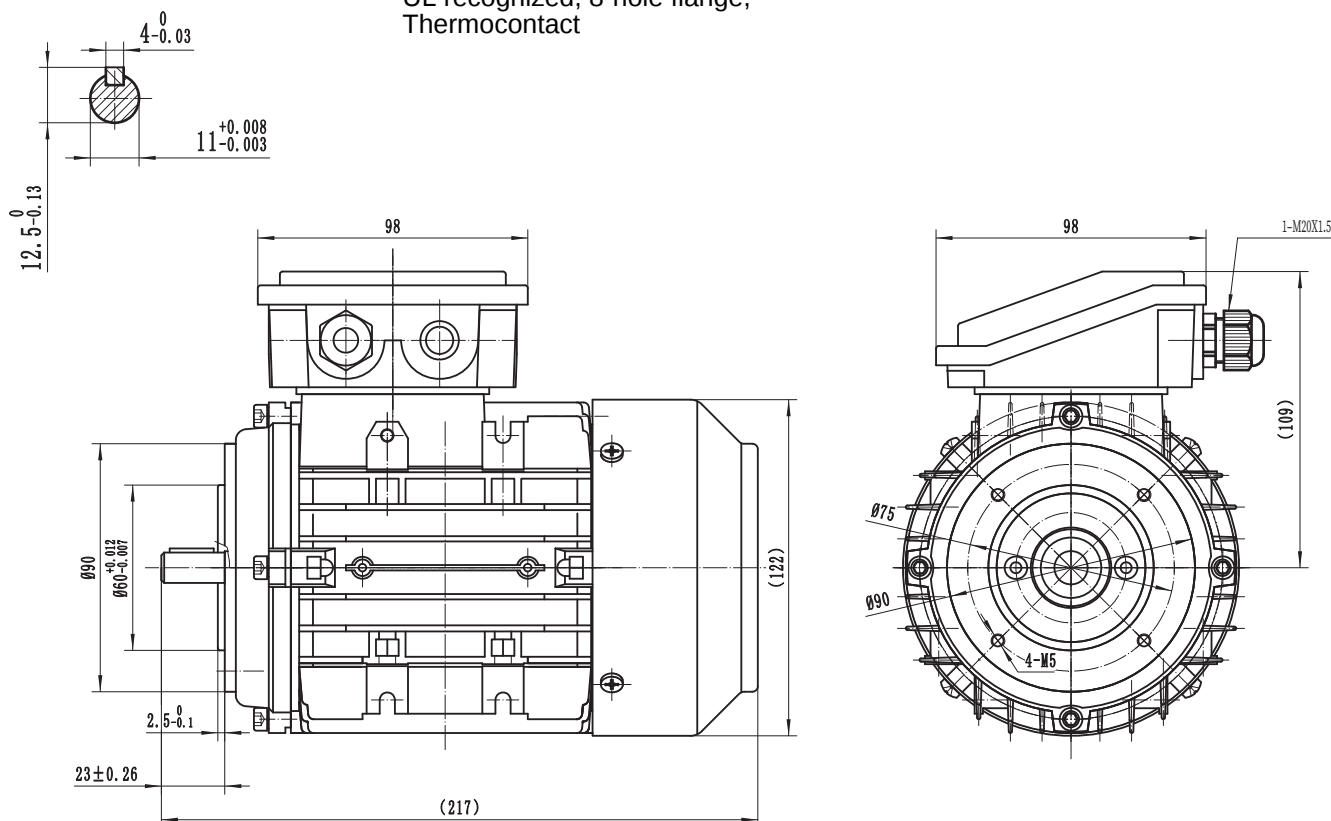

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no