

T2A63B-4 0,18KW 230/400V B3 D=14mm




Three-phase asynchronous motor in aluminum

Motor type T2A63B-4 0,18KW 230/400V B3 D=14mm
Brand BUSCK
Item number 83040661K2

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,18	50	0,96	1350
400	0,18	50	0,55	1350
460	0,21	60	0,55	1620

Duty	S1	Efficiency class	IE2
Enclosure	IP55	Efficiency, load 100%	64,7
Insulation class	F	Efficiency, load 75%	64,9
Cooling	IC411 (TEFC)	Efficiency, load 50%	60,3
Max. ambient temp.	40°C	Power fact, load 100%	0,73
Min. ambient temp.	-20°C	Painting	Standard
Max. temp. rise	80 K	Color	RAL 9005
Max altitude, masl	1000	Weight kg	4
Torque, Nm	1,27	Sound pressure Lp dB(A)	52
Starting torque ratio	2	Balance grade	Normal
Pull up torque ratio	1,9	Inertia kgm2	0,00034
Pull out torque ratio	2,1		
Starting current ratio	3,6		

Note IE2
Axel 14x30mm
Skylt stämplad:
220-230/380-415V 50Hz
220-230/380-400V 60Hz

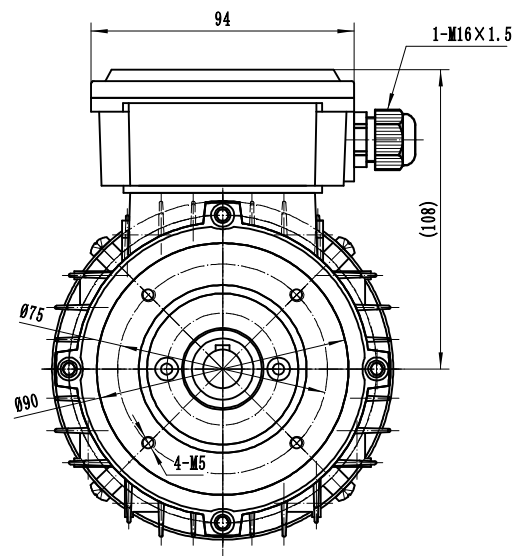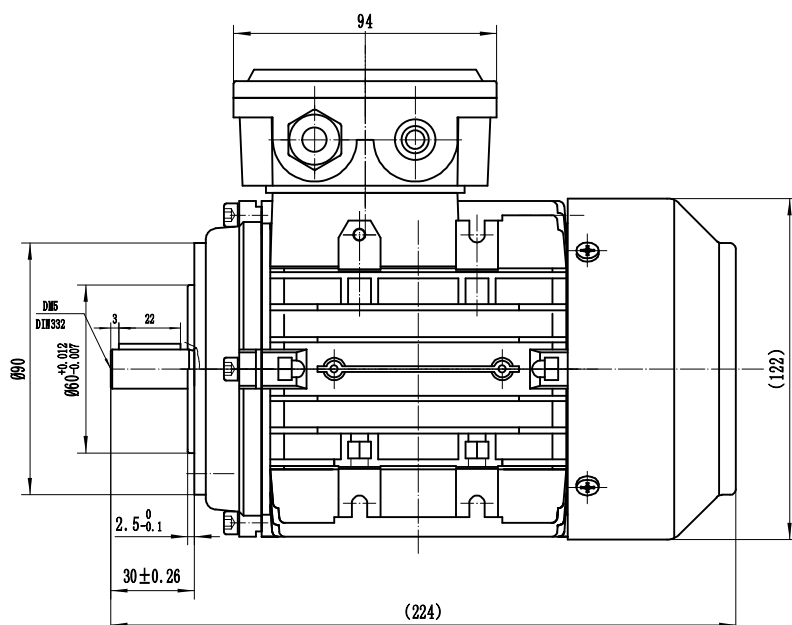

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no