

T712-4 0,37kW 230/400V B14 8 hålsfläns


Single-phase asynchronous motor in aluminum

Motor type T712-4 0,37kW 230/400V B14 8 hålsfläns
Brand BUSCK
Item number 830407238UL

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	0,37	50	1,76	1400
400	0,37	50	1,01	1400
460	0,43	60	1,01	1680

Duty	S1	Efficiency class	IE2
Enclosure	IP55	Efficiency, load 100%	72,7
Insulation class	F	Efficiency, load 75%	73
Cooling	IC411 (TEFC)	Efficiency, load 50%	69,2
Max. ambient temp.	40°C	Power fact, load 100%	0,73
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	6,2
Torque, Nm	2,52	Sound pressure Lp dB(A)	55
Starting torque ratio	2,4	Bearing DE	6204-2Z/C3
Pull up torque ratio	2	Bearing NDE	6204-2Z/C3
Pull out torque ratio	2,5	Balance grade	Normal
Starting current ratio	4,7	Inertia kgm ²	0,00082
Winding protection	Thermocontacts	Cable entries	1xM20

Note 0,43kW 460V 60Hz , Thermocontact
IE2
UL approved

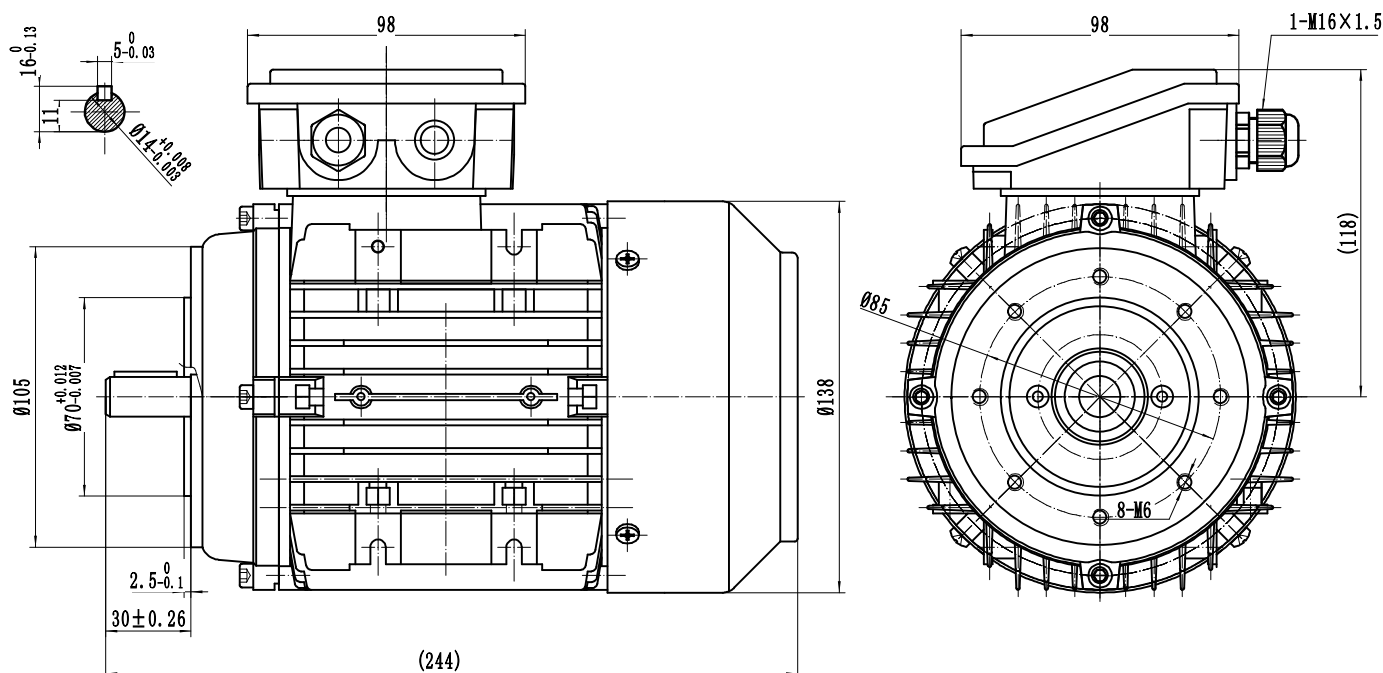

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no