

TM802-2 1.1kW 230/400V B3


Three-phase asynchronous motor in aluminum

Motor type TM802-2 1.1kW 230/400V B3
 Brand BUSCK
 Item number 93020811UL

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	1,1	50	4,07	2900
400	1,1	50	2,34	2900
460	1,27	60	2,34	3480

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	82,7
Insulation class	F	Efficiency, load 75%	82,5
Cooling	IC411 (TEFC)	Efficiency, load 50%	79,9
Max. ambient temp.	45°C	Power fact, load 100%	0,83
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	10
Torque, Nm	3,63	Sound pressure Lp dB(A)	67
Starting torque ratio	3,2	Bearing DE	6204-2Z/C3
Pull up torque ratio	2	Bearing NDE	6204-2Z/C3
Pull out torque ratio	3,4	Balance grade	Normal
Starting current ratio	8,7	Inertia kgm ²	0,00127
Winding protection	Thermocontacts	Cable entries	1xM20

Note UL approved, Nema Premium efficiency @1.5HP/460/60,
 Thermocontacts

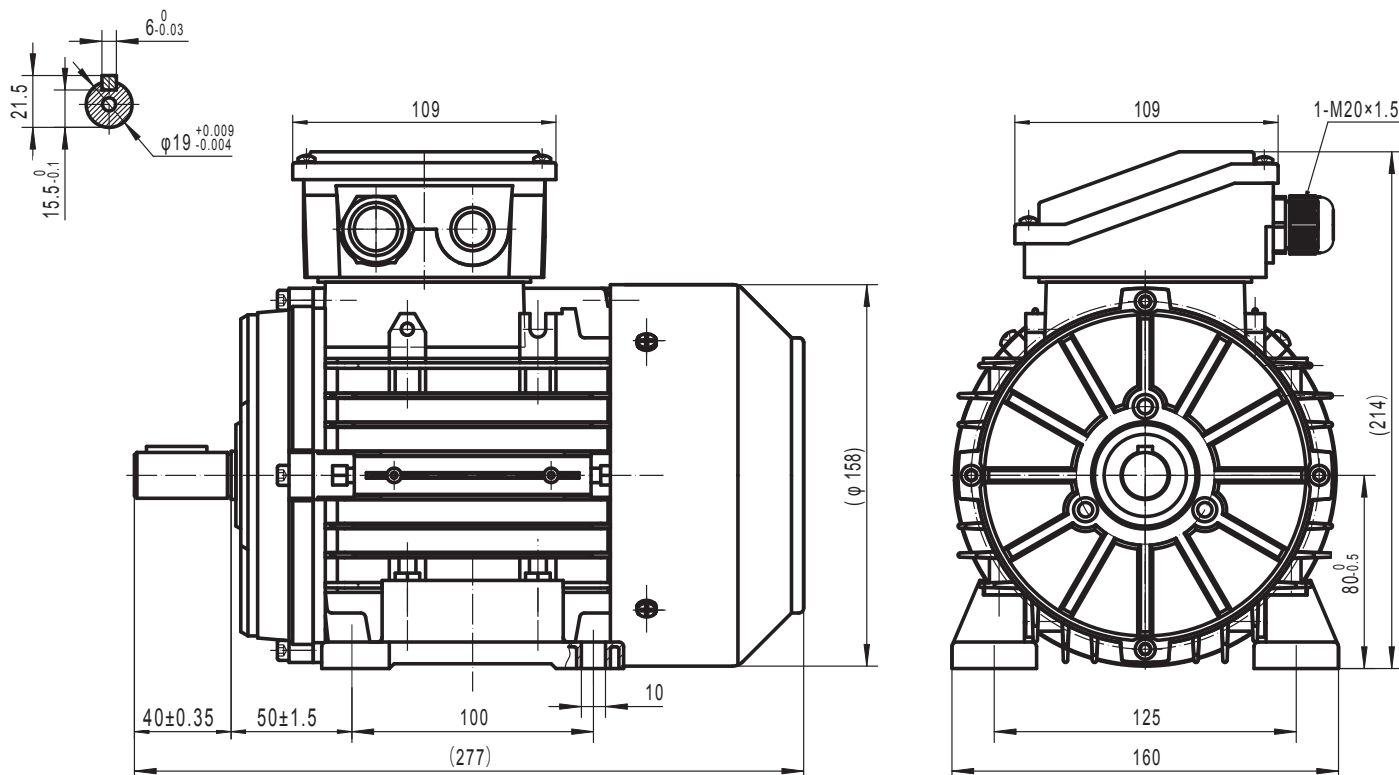

BUSCK
 www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
 info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
 info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
 info@busck.no