

TM132SA-2 5,5KW 400/690V B35


Three-phase asynchronous motor in aluminum

Motor type TM132SA-2 5,5KW 400/690V B35
Brand BUSCK
Item number 93021324UL

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	5,5	50		
400	5,5	50		
460	6,33	60		

Duty	S1	Efficiency class	IE3
Enclosure	IP55		
Insulation class	F	Painting	Standard
Cooling	IC411 (TEFC)	Color	RAL 9005
Max. ambient temp.	45°C	Weight kg	44
Min. ambient temp.	-20°C	Bearing DE	6308-2Z/C3
Max. temp. rise	80 K	Bearing NDE	6208-2Z/C3
Max altitude, masl	1000	Balance grade	Normal
		Cable entries	2xM25, 1xM16
Winding protection	Thermocontacts		

Note UL approved

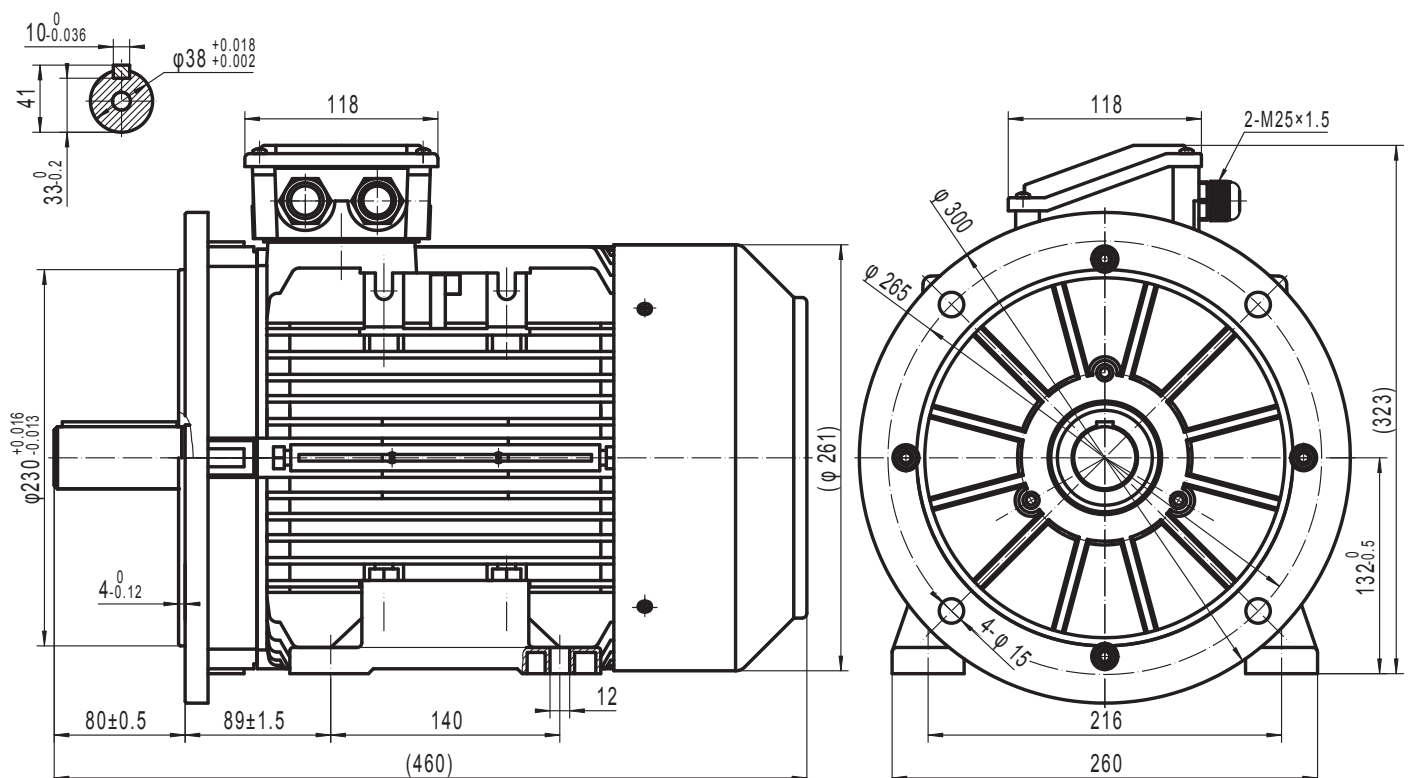

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no