

T3A132SB-2 12 kW S6-15% 400/690V B3


Three-phase asynchronous motor in aluminum

Motor type T3A132SB-2 12 kW S6-15% 400/690V B3
Brand BUSCK
Item number 93021331K

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	12	50	21,4	2880
690	12	50	12,31	2880
460	13,8	60	21,4	3456

Duty	S6-15%	Power fact, load 100%	0,93
Enclosure	IP55	Painting	Standard
Insulation class	F	Color	RAL 9005
Cooling	IC411 (TEFC)	Weight kg	51,7
Max. ambient temp.	45°C	Sound pressure Lp dB(A)	80
Min. ambient temp.	-20°C	Bearing DE	6308-2Z/C3
Max. temp. rise	80 K	Bearing NDE	6208-2Z/C3
Max altitude, masl	1000	Balance grade	Normal
Torque, Nm	39,8	Inertia kgm ²	0,018996
Starting torque ratio	2,3	Cable entries	2xM25, 1xM16
Pull up torque ratio	1,5		
Pull out torque ratio	2,9		
Starting current ratio	7,4		
Winding protection	Thermocontacts		
This motor has DNV type approval			

Note IE3, Termokontakter
Stämplad 12kW S6-15%
Kabelförskruvningar åt vänster sett från drivsida.

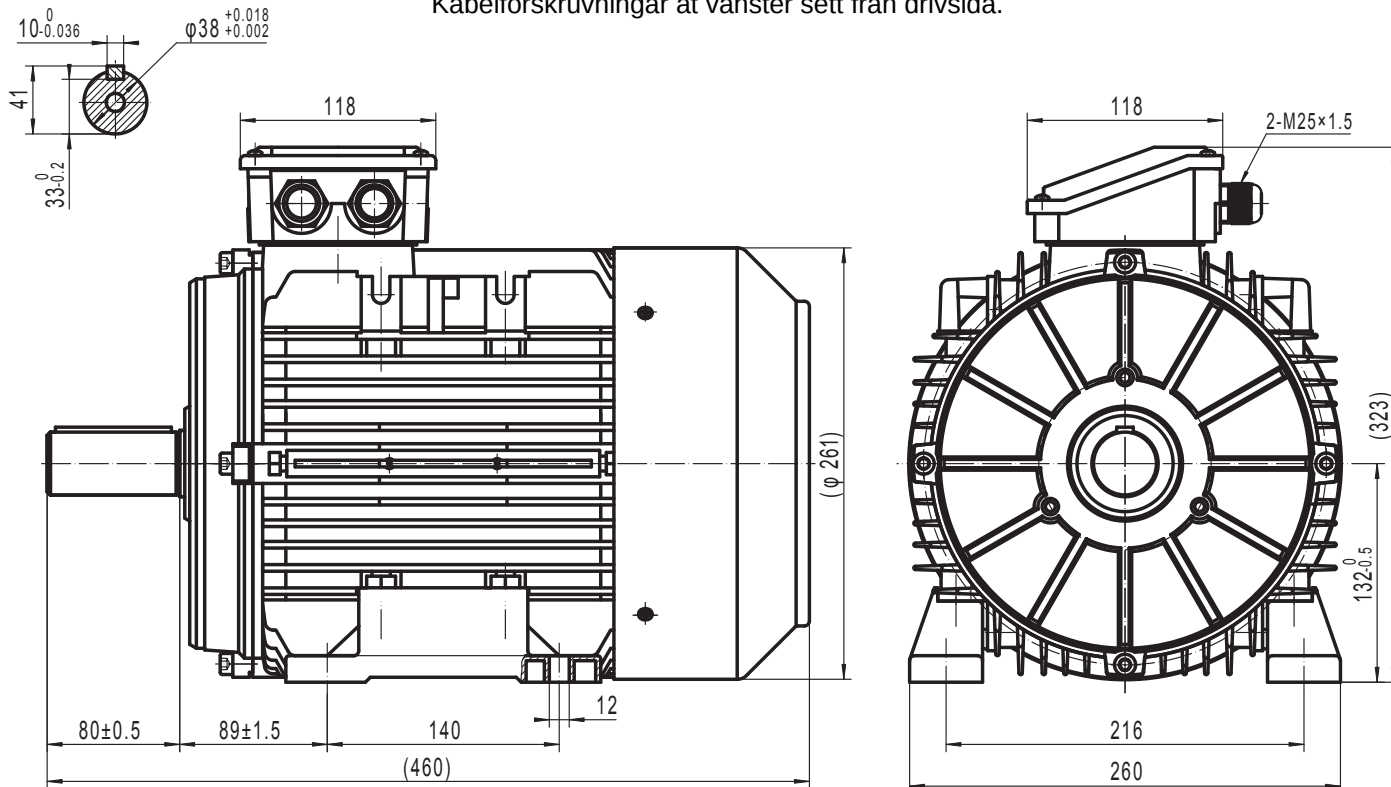

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no