

# T3A160MB-2 15KW 400/690V B35

## Three-phase asynchronous motor in aluminum

Motor type T3A160MB-2 15KW 400/690V B35  
Brand BUSCK  
Item number 93021614

| Voltage V | Power kW | Frequency Hz | Current A | Speed rpm |
|-----------|----------|--------------|-----------|-----------|
| 400       | 15       | 50           | 26,5      | 2960      |
| 690       | 15       | 50           | 15,2      | 2960      |
| 460       | 17,25    | 60           | 26,5      | 3552      |


Duty S1  
Enclosure IP55  
Insulation class F  
Cooling IC411 (TEFC)  
Max. ambient temp. 45°C  
Min. ambient temp. -20°C  
Max. temp. rise 80 K  
Max altitude, masl 1000

Torque, Nm 48,4  
Starting torque ratio 3,9  
Pull up torque ratio 1,4  
Pull out torque ratio 4,2  
Starting current ratio 11,4  
Winding protection Thermistors  
This motor has DNV type approval

Efficiency class IE3  
Efficiency, load 100% 91,9  
Efficiency, load 75% 91,5  
Efficiency, load 50% 89,9  
Power fact, load 100% 0,89

Painting Standard  
Color RAL 9005  
Weight kg 104  
Sound pressure Lp dB(A) 86  
Bearing DE 6309-2Z/C3  
Bearing NDE 6209-2Z/C3  
Balance grade Normal  
Inertia kgm<sup>2</sup> 0,0767512  
Cable entries 2xM32, 1xM16

Note IE3 Färg svart

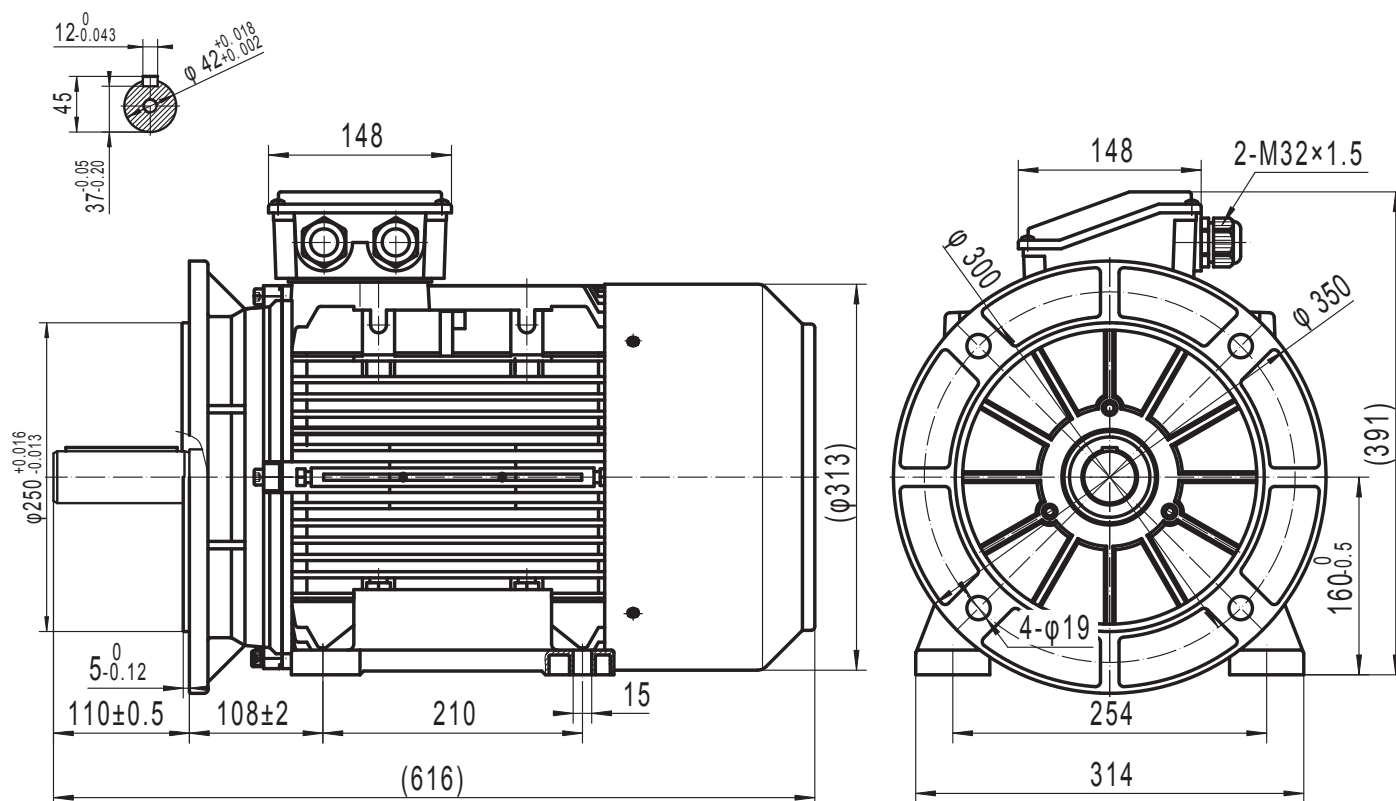

**BUSCK**  
www.busck.eu

Busck & Co AB  
Gamla Riksvägen 14  
428 32 Göteborg  
Sweden  
556027-1990  
info@busck.se

Busck & Co ApS  
Postboks 108  
0900 København C  
Denmark  
info@busck.eu

Busck AS  
Skibåsen 35C  
4636 Kristiansand  
Norway  
info@busck.no