

SWE280S-2 75KW 400/690V B35


Three-phase asynchronous motor in cast iron

Motor type SWE280S-2 75KW 400/690V B35
 Brand BUSCK
 Item number 93022804

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	75	50	125,7	2980
690	75	50	72,3	2980
460	86,25	60	125,7	3576

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	95,2
Insulation class	F	Efficiency, load 75%	95,1
Cooling	IC411 (TEFC)	Efficiency, load 50%	94,1
Max. ambient temp.	40°C	Power fact, load 100%	0,90
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	518
Torque, Nm	240	Sound pressure Lp dB(A)	80
Starting torque ratio	2,1	Bearing DE	6314
Pull out torque ratio	2,3	Bearing NDE	6314
Starting current ratio	7,6	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm ²	0,743
		Cable entries	2xM63 + 1xM16 (FL21)

Note IE3, Kopplingslåda med FL21, 2x M63 + 1 x M16
 Färg svart
 axel 65x140

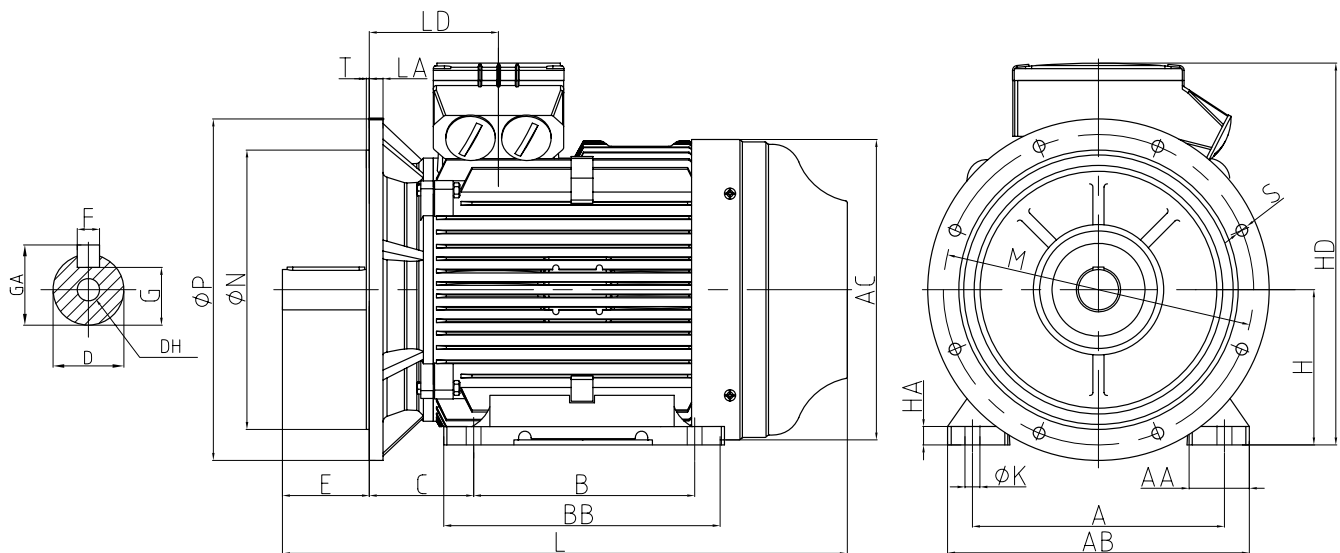

A	B	B1	C	H	D	E	F	GA	DH	M	N	P	AB	AC	HA	HD	BB	LD	L
457	368		190	280	65	140	18	69	M20	500	450	550	542	550	35	681	490	221	968