

T3C355M-2 250KW 400/690V B35


Three-phase asynchronous motor in cast iron

Motor type T3C355M-2 250KW 400/690V B35
 Brand BUSCK
 Item number 93023554T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	250	50	448,4	2960
690	250	50	257,8	2960
460	287,5	60	448,4	3552

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	95,8
Insulation class	F	Efficiency, load 75%	96,2
Cooling	IC411 (TEFC)	Efficiency, load 50%	94,8
Max. ambient temp.	40°C	Power fact, load 100%	0,84
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	1650
Torque, Nm	806,59	Sound pressure Lp dB(A)	103
Starting torque ratio	2	Bearing DE	6319 C3
Pull up torque ratio	1,5	Bearing NDE	6319 C3
Pull out torque ratio	2,3	Balance grade	Normal
Starting current ratio	6,5	Inertia kgm ²	3,14272
Winding protection	Thermistors	Cable entries	2xM63, 1xM16
This motor has DNV type approval			

Note IE3

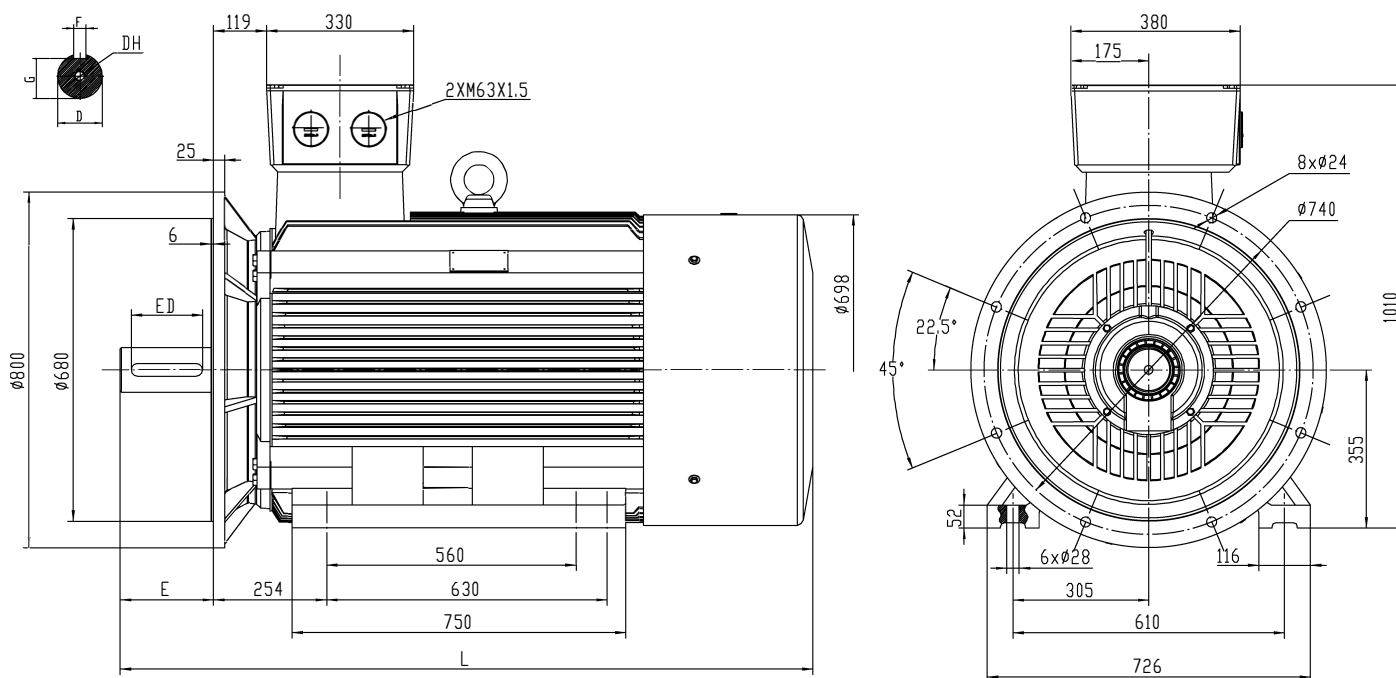

TYPE	D	E	F	G	DH	ED	L	
Y2-355M/L-2P	Ø70	140	20-0,043	68	M20x42	110	1500	

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no