

T3CR225M-4 45KW 400/690V B5




Three-phase asynchronous motor in cast iron

Motor type T3CR225M-4 45KW 400/690V B5
Brand BUSCK
Item number 93042262T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	45	50	79,3	1470
690	45	50	45,6	1470
460	51,75	60	79,3	1764

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	94,2
Insulation class	F	Efficiency, load 75%	95,2
Cooling	IC411 (TEFC)	Efficiency, load 50%	94,5
Max. ambient temp.	45°C	Power fact, load 100%	0,87
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
Torque, Nm	292,35	Weight kg	352,9
Starting torque ratio	2,5	Sound pressure Lp dB(A)	81
Pull up torque ratio	1,5	Bearing DE	6313 C3
Pull out torque ratio	2,5	Bearing NDE	6313 C3
Starting current ratio	9	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm2	0,65309
This motor has DNV type approval		Cable entries	2xM50, 1xM16

Note IE3

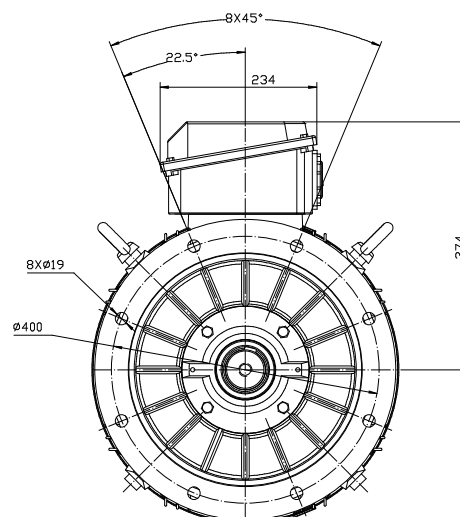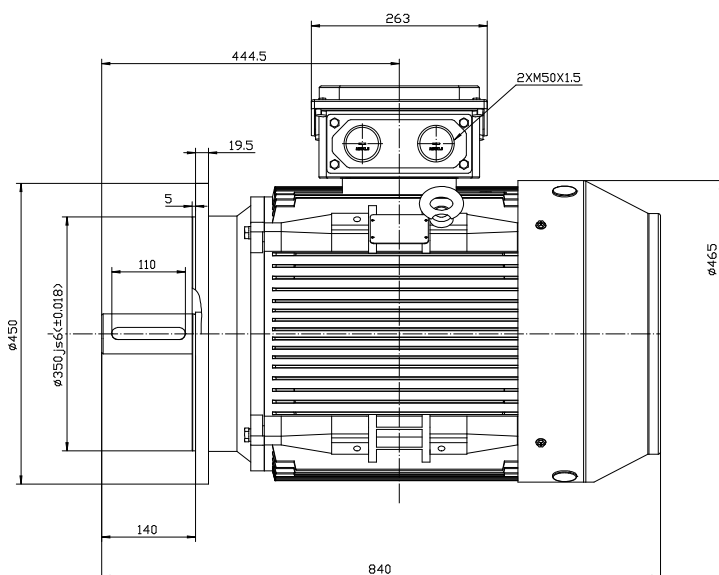

TC 225M-4.6.8P B5

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no