


SWE250M-4 55KW 400/690V B35

Three-phase asynchronous motor in cast iron

Motor type SWE250M-4 55KW 400/690V B35
 Brand BUSCK
 Item number 93042504

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	55	50	95,0	1490
690	55	50	54,6	1490
460	63,25	60	95,0	1788

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	95
Insulation class	F	Efficiency, load 75%	95
Cooling	IC411 (TEFC)	Efficiency, load 50%	93,8
Max. ambient temp.	40°C	Power fact, load 100%	0,88
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	391
Torque, Nm	353	Sound pressure Lp dB(A)	68
Starting torque ratio	2,3	Bearing DE	6314
Pull out torque ratio	2,7	Bearing NDE	6313
Starting current ratio	7,3	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm ²	0,841
		Cable entries	2xM63 + 1xM16 (FL21)
Note	IE3, Kopplingslåda med FL21, 2x M63 + 1 x M16 Termistorer, Färg svart		

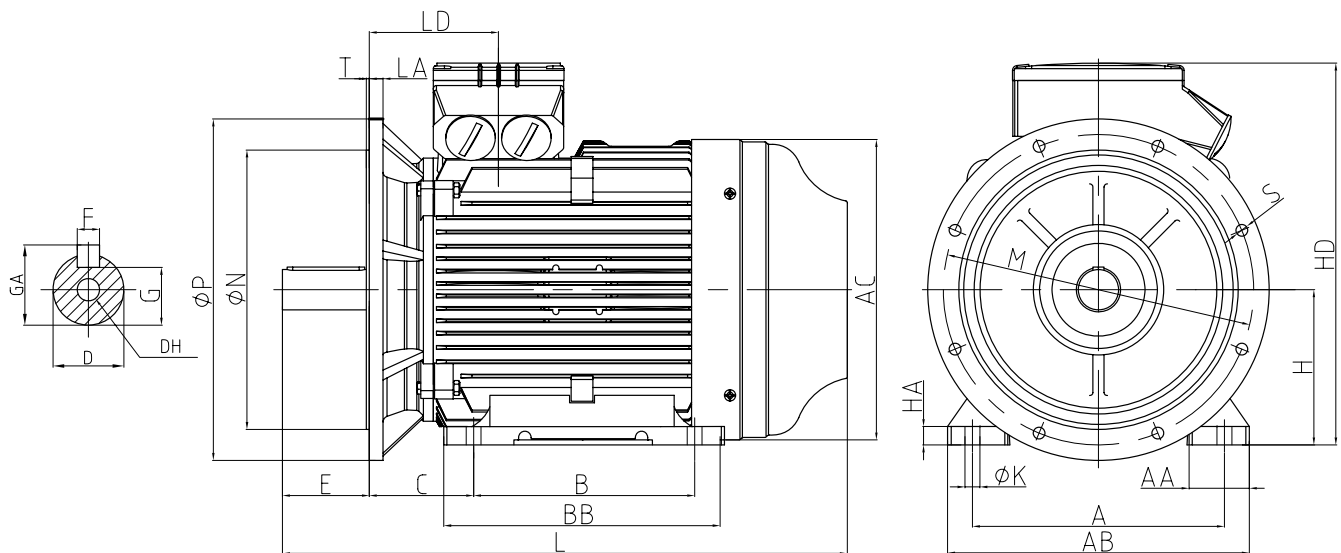

A	B	B1	C	H	D	E	F	GA	DH	M	N	P	AB	AC	HA	HD	BB	LD	L
406	349		168	250	65	140	18	69	M20	500	450	550	485	485	32	622	445	212	915