

WY355L-4 400KW 400/690V B3


Three-phase asynchronous motor in aluminum

Motor type WY355L-4 400KW 400/690V B3
Brand BUSCK
Item number 93043581

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
400	400	50	668,0	1490
690	400	50	384,1	1490
460	460	60	668,0	1788

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	96,0
Insulation class	F		
Cooling	IC411 (TEFC)	Painting	Standard
Max. ambient temp.	40°C	Color	RAL 9005
Min. ambient temp.	-20°C	Weight kg	2310
Max. temp. rise	80 K	Bearing DE	NU324
Max altitude, masl	1000	Bearing NDE	6322
		Balance grade	Normal
		Cable entries	2xM63 + 1xM16 (FL33)

Note
Axel 100X210 mm SKF lager
Rullager DE NU324
B mått 630, 710, 800 och 900 mm
3XPTC155°C i lindningen
PT100 i lagersätena
Verkningsgrad IE3 (96,0%)

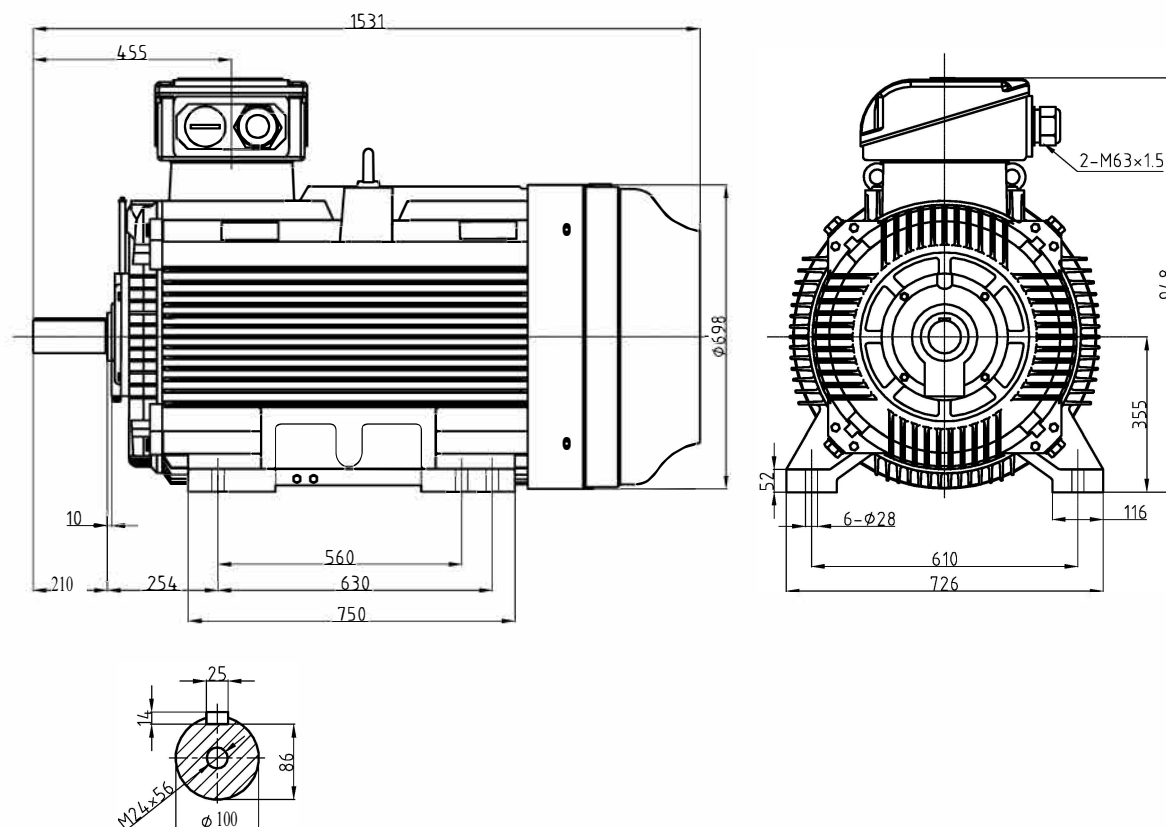

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no