

SWE160MA-2 11KW 230/400V B35

Three-phase asynchronous motor in cast iron

Motor type SWE160MA-2 11KW 230/400V B35
Brand BUSCK
Item number 93A21604w

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	11	50	33,6	2935
400	11	50	19,3	2935
460	12,65	60	19,3	3522




Duty S1
Enclosure IP55
Insulation class F
Cooling IC411 (TEFC)
Max. ambient temp. 40°C
Min. ambient temp. -20°C
Max. temp. rise 80 K
Max altitude, masl 1000

Torque, Nm 35,8
Starting torque ratio 2,2
Pull out torque ratio 2,6
Starting current ratio 7,6

Efficiency class IE3
Efficiency, load 100% 91,6
Efficiency, load 75% 91,5
Efficiency, load 50% 90,5
Power fact, load 100% 0,90

Painting Standard
Color RAL 9005
Weight kg 113
Sound pressure Lp dB(A) 69
Bearing DE 6209-2Z/C3
Bearing NDE 6209-2Z/C3
Balance grade Normal
Inertia kgm² 0,0655

Note IE3, Kopplingslåda med kabelanslutning
Färg svart

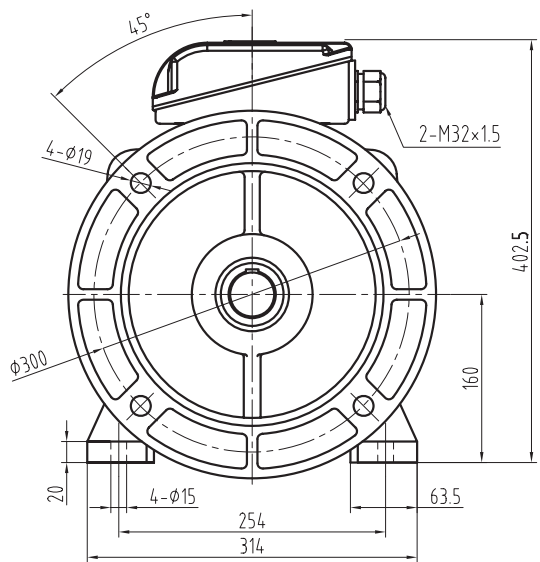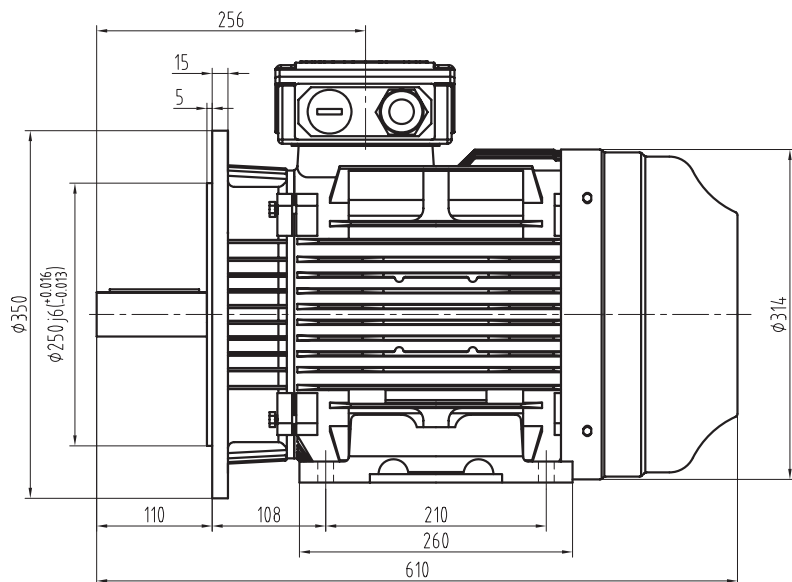

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no