

SWE225M-2 45KW 230/400V B35


Three-phase asynchronous motor in cast iron

Motor type SWE225M-2 45KW 230/400V B35
 Brand BUSCK
 Item number 93A22254

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	45	50	131,3	2965
400	45	50	75,5	2965
460	51,75	60	75,5	3558

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	94,5
Insulation class	F	Efficiency, load 75%	94,7
Cooling	IC411 (TEFC)	Efficiency, load 50%	93,7
Max. ambient temp.	40°C	Power fact, load 100%	0,91
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	237
Torque, Nm	145	Sound pressure Lp dB(A)	75
Starting torque ratio	2,1	Bearing DE	6312
Pull out torque ratio	2,4	Bearing NDE	6312
Starting current ratio	7,7	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm2	0,411
		Cable entries	2xM50 + 1xM16 (FL21)

Note IE3, Kopplingslåda med FL21, 2x M50 + 1 x M16
 Färg svart

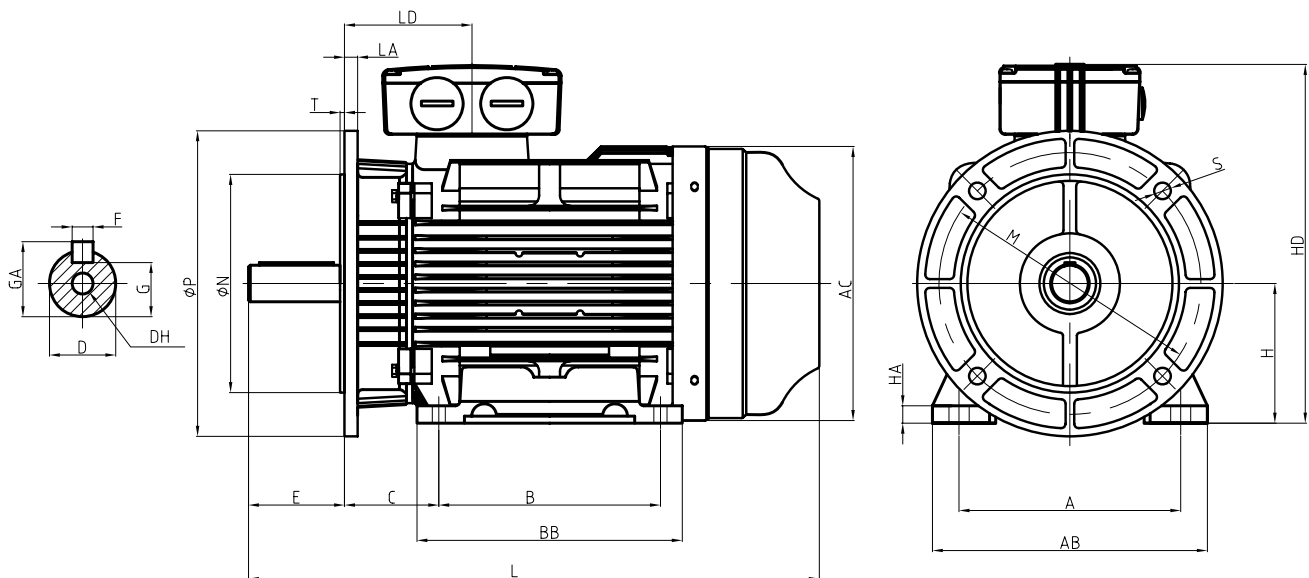

A	B	B1	C	H	D	E	F	GA	DH	M	N	P	AB	AC	HA	HD	BB	LD	L
356	311		149	225	55	110	16	59	M20	400	350	450	430	450	28	555	390	189	820