

SWE250M-2 55KW 230/400V B35


Three-phase asynchronous motor in cast iron

Motor type SWE250M-2 55KW 230/400V B35
 Brand BUSCK
 Item number 93A22504

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	55	50	159,7	2965
400	55	50	91,8	2965
460	63,25	60	91,8	3558

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	95
Insulation class	F	Efficiency, load 75%	95,2
Cooling	IC411 (TEFC)	Efficiency, load 50%	94,2
Max. ambient temp.	40°C	Power fact, load 100%	0,91
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	391
Torque, Nm	177	Sound pressure Lp dB(A)	81
Starting torque ratio	2,1	Bearing DE	6313
Pull out torque ratio	2,4	Bearing NDE	6313
Starting current ratio	7,6	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm2	0,435
		Cable entries	2xM63 + 1xM16 (FL21)

Note IE3, Kopplingslåda med FL21, 2x M63 + 1 x M16
 Färg svart

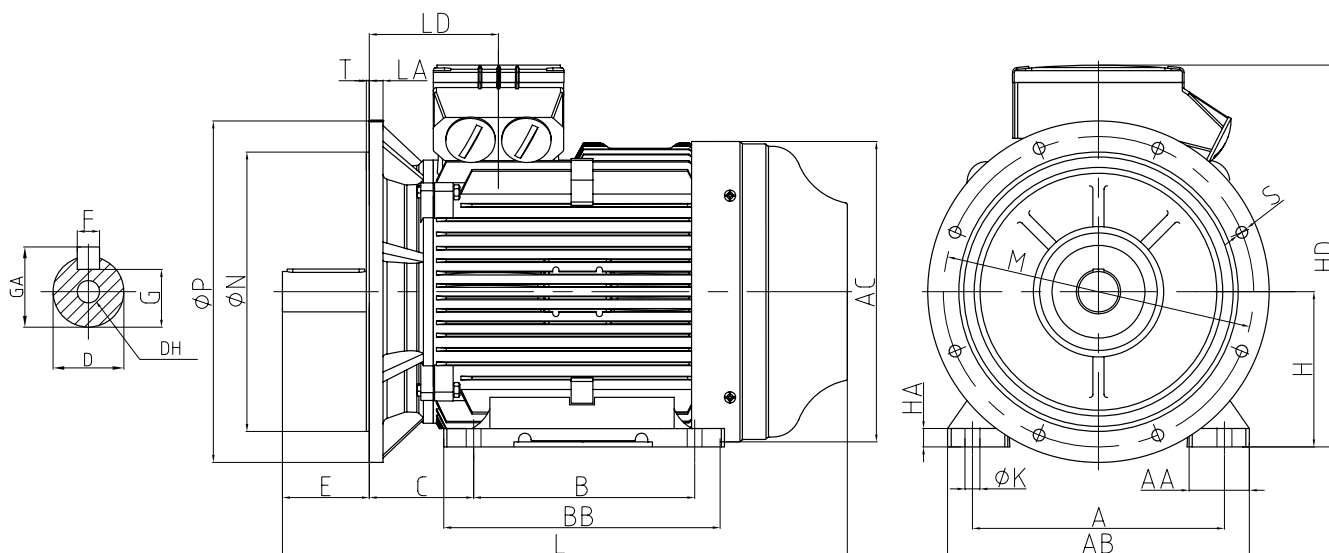

A	B	B1	C	H	D	E	F	GA	DH	M	N	P	AB	AC	HA	HD	BB	LD	L
406	349		168	250	60	140	18	64	M20	500	450	550	485	485	32	622	445	212	915