

T3CR180M-4 18,5KW 230/400V B5




Three-phase asynchronous motor in cast iron

Motor type T3CR180M-4 18,5KW 230/400V B5
 Brand BUSCK
 Item number 93A41802T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	18,5	50	58,3	1460
400	18,5	50	33,5	1460
460	21,28	60	33,5	1752

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	92,6
Insulation class	F	Efficiency, load 75%	93,6
Cooling	IC411 (TEFC)	Efficiency, load 50%	93
Max. ambient temp.	45°C	Power fact, load 100%	0,86
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
Torque, Nm	121,01	Weight kg	185
Starting torque ratio	2,5	Sound pressure Lp dB(A)	76
Pull up torque ratio	1,8	Bearing DE	6311 C3
Pull out torque ratio	3	Bearing NDE	6311 C3
Starting current ratio	9	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm ²	0,1553
This motor has DNV type approval		Cable entries	2xM32, 1xM16

Note IE3

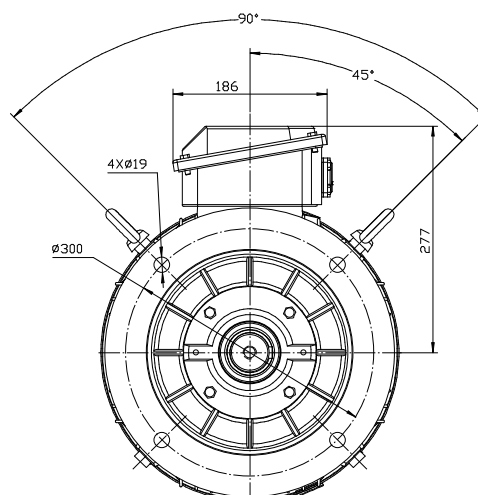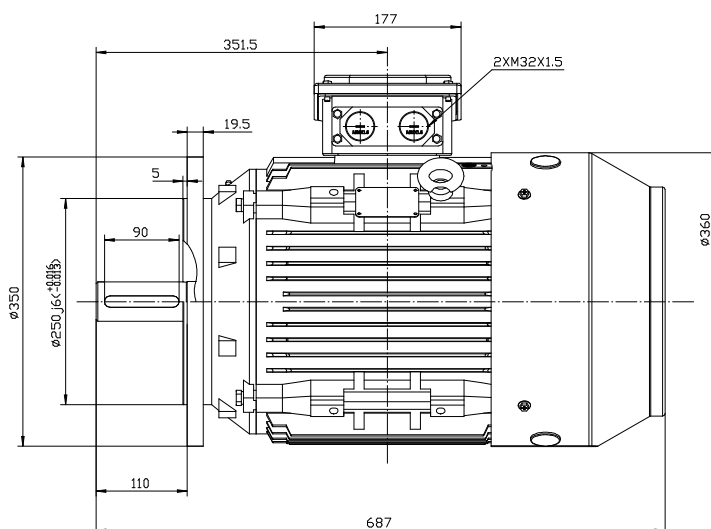

TC 180M B5

BUSCK
www.busck.eu

Busck & Co AB
 Gamla Riksvägen 14
 428 32 Göteborg
 Sweden
 556027-1990
info@busck.se

Busck & Co ApS
 Postboks 108
 0900 København C
 Denmark
info@busck.eu

Busck AS
 Skibåsen 35C
 4636 Kristiansand
 Norway
info@busck.no