

T3CR180L-4 22KW 230/400V B5


Three-phase asynchronous motor in cast iron

Motor type T3CR180L-4 22KW 230/400V B5
Brand BUSCK
Item number 93A41812T

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	22	50	66,7	1460
400	22	50	38,4	1460
460	25,3	60	38,4	1752

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	93
Insulation class	F	Efficiency, load 75%	93,7
Cooling	IC411 (TEFC)	Efficiency, load 50%	92,9
Max. ambient temp.	45°C	Power fact, load 100%	0,87
Max. temp. rise	80 K		
Max altitude, masl	1000	Painting	Standard
		Color	RAL 9005
Torque, Nm	143,90	Weight kg	195
Starting torque ratio	2,5	Sound pressure Lp dB(A)	76
Pull up torque ratio	1,8	Bearing DE	6311 C3
Pull out torque ratio	3	Bearing NDE	6311 C3
Starting current ratio	10	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm2	0,19433
This motor has DNV type approval		Cable entries	2xM32, 1xM16

Note IE3

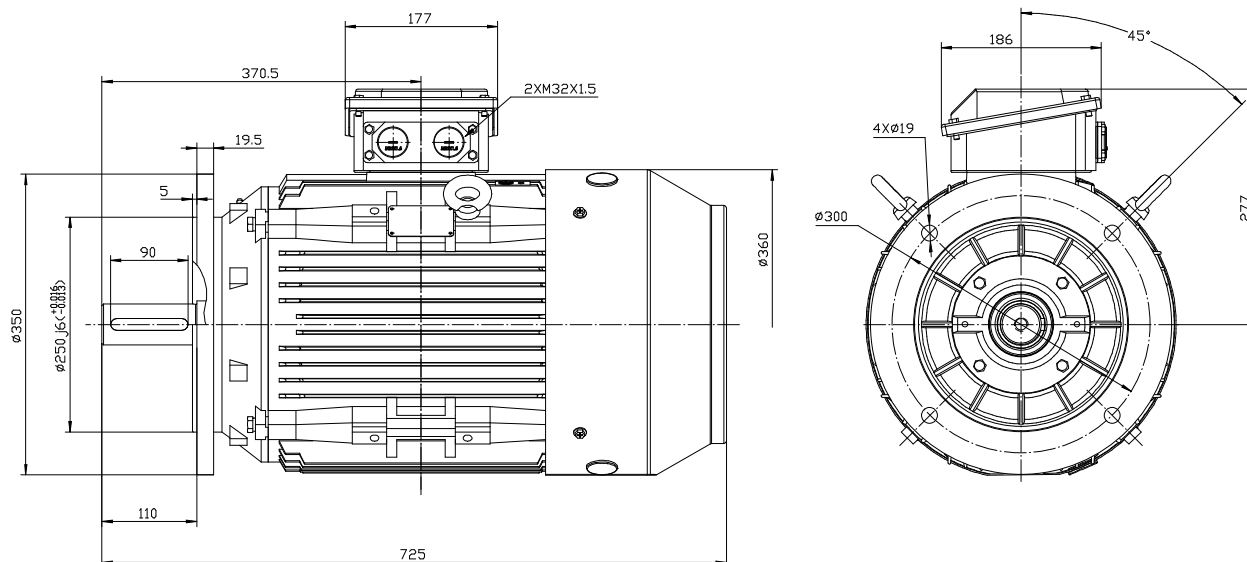

TC 180L B5

BUSCK
www.busck.eu

Busck & Co AB
Gamla Riksvägen 14
428 32 Göteborg
Sweden
556027-1990
info@busck.se

Busck & Co ApS
Postboks 108
0900 København C
Denmark
info@busck.eu

Busck AS
Skibåsen 35C
4636 Kristiansand
Norway
info@busck.no