


SWE280S-4 75KW 230/400V B3

Three-phase asynchronous motor in cast iron

Motor type SWE280S-4 75KW 230/400V B3
 Brand BUSCK
 Item number 93A42801

Voltage V	Power kW	Frequency Hz	Current A	Speed rpm
230	75	50	226,1	1490
400	75	50	130,0	1490
460	86,25	60	130,0	1788

Duty	S1	Efficiency class	IE3
Enclosure	IP55	Efficiency, load 100%	95,4
Insulation class	F	Efficiency, load 75%	95,3
Cooling	IC411 (TEFC)	Efficiency, load 50%	94,3
Max. ambient temp.	40°C	Power fact, load 100%	0,87
Min. ambient temp.	-20°C		
Max. temp. rise	80 K	Painting	Standard
Max altitude, masl	1000	Color	RAL 9005
		Weight kg	520
Torque, Nm	481	Sound pressure Lp dB(A)	68
Starting torque ratio	2,3	Bearing DE	6317
Pull out torque ratio	2,7	Bearing NDE	6314
Starting current ratio	7,4	Balance grade	Normal
Winding protection	Thermistors	Inertia kgm ²	1,532
		Cable entries	2xM63 + 1xM16 (FL21)
Note	IE3, Kopplingslåda med FL21, 2x M63 + 1 x M16 Färg svart		

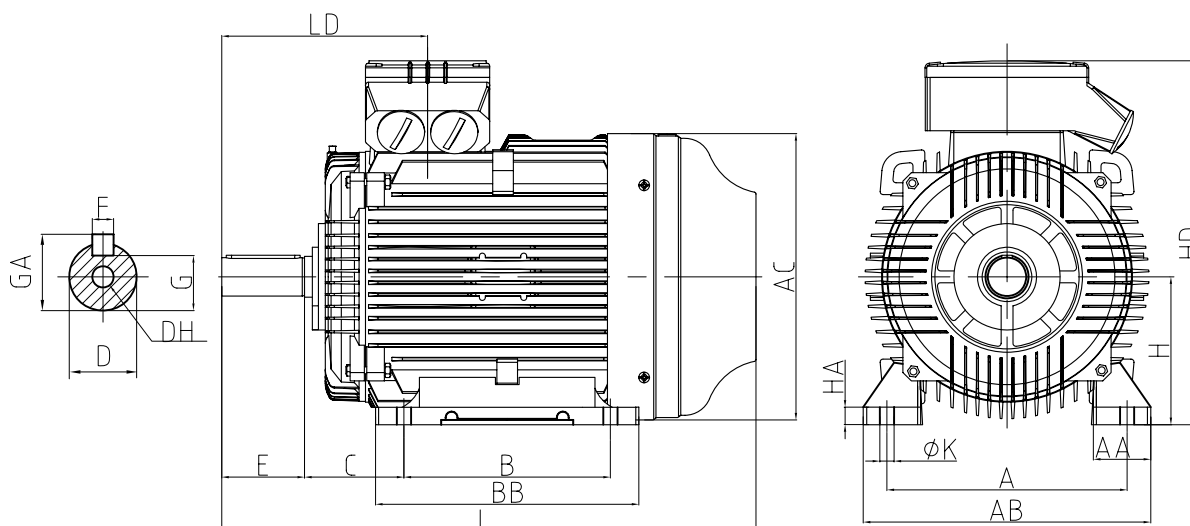

A	B	B1	C	H	D	E	F	G	DH	GA	AA	AB	AC	HA	HD	BB	LD	L
457	368		190	280	75	140	20	67.5	M20	79.5	85	542	550	35	681	490	361	968